


3.0x1.0mm SMD CHIP LED LAMP



SUN LED

ZAG56W

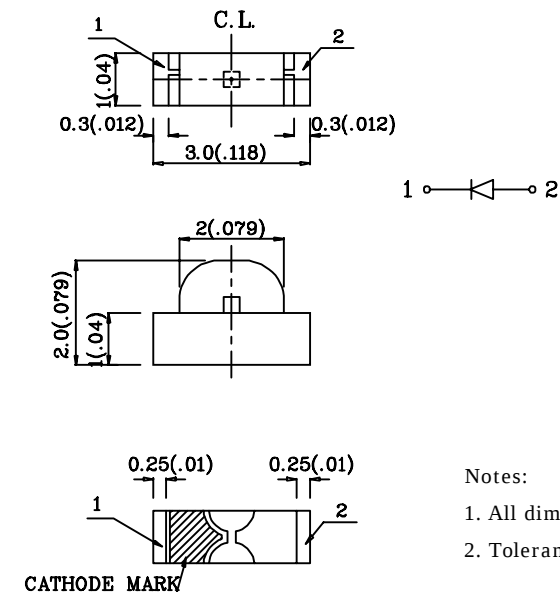


Absolute maximum ratings ($T_A=25^{\circ}\text{C}$)		AG (InGaN)	Unit
Reverse voltage	V_R	5	V
Forward current	I_F	30	mA
Forward current (peak) 1/10Duty cycle 0.1ms pulse width	i_{FS}	100	mA
Power dissipation	P_T	135	mW
Operation temperature	T_A	-20 ~ +80	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-30 ~ +85	

Operating Characteristics ($T_A=25^{\circ}\text{C}$)		AG (InGaN)	Unit
Forward voltage (typ.) ($I_F=20\text{mA}$)	V_F	3.5	V
Forward voltage (max.) ($I_F=20\text{mA}$)	V_F	4.0	V
Reverse current ($V_R=5\text{V}$)	I_R	10	μA
Wavelength at peak emission ($I_F=20\text{mA}$)	λ_{peak}	502	nm
Spectral Line half-width ($I_F=20\text{mA}$)	$\Delta\lambda$	30	nm
Capacitance ($V_F=0$, $f=1\text{MHz}$)	C	90	pF


Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity ($I_F=20\text{mA}$) mcd		Wavelength nm	Viewing Angle
				min.	typ.		
ZAG56W	green	InGaN	water clear	55	90	502	120°

ZAG56W

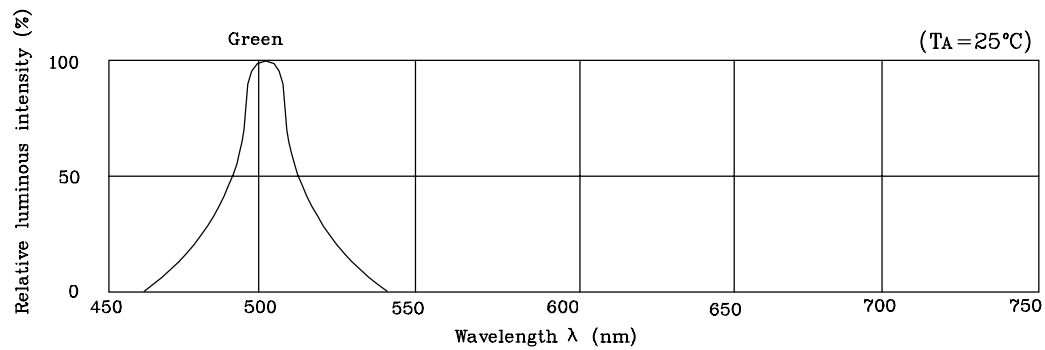


❖AG


Forward current derating curve




Forward current Vs. Forward voltage



Radiation Characteristics



Luminous Intensity Vs. Forward Current




ZAG56W

❖SMT Reflow Soldering Instructions



❖Recommended Soldering Pattern (Units : mm)

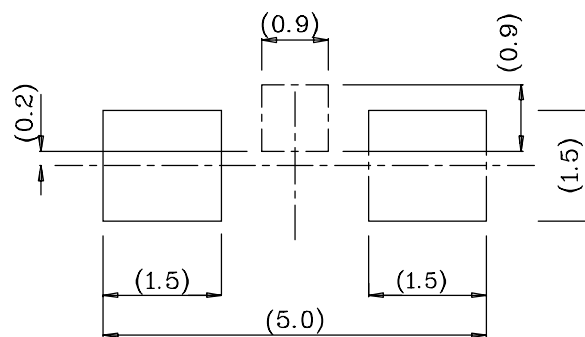

ZAG56W

❖Tape Specification (Units : mm)

