





1.6x0.8mm SMD CHIP LED LAMP



SUN LED

ZMO53W-01



Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.1(0.004)$ unless otherwise noted.

Absolute maximum ratings ($T_A=25^\circ\text{C}$)		MO (InGaAlP)	Unit
Reverse voltage	V_R	5	V
Forward current	I_F	30	mA
Forward current (peak) 1/10Duty cycle 0.1ms pulse width	i_{FS}	150	mA
Power dissipation	P_T	75	mW
Operation temperature	T_A	-40 ~ +85	$^\circ\text{C}$
Storage temperature	T_{stg}		

Operating Characteristics ($T_A=25^\circ\text{C}$)		MO (InGaAlP)	Unit
Forward voltage (typ.) ($I_F=20\text{mA}$)	V_F	1.95	V
Forward voltage (max.) ($I_F=20\text{mA}$)	V_F	2.5	V
Reverse current ($V_R=5\text{V}$)	I_R	10	μA
Wavelength at peak emission ($I_F=20\text{mA}$)	λ_{peak}	610	nm
Spectral Line half-width ($I_F=20\text{mA}$)	$\Delta\lambda$	15	nm
Capacitance ($V_F=0$, $f=1\text{MHz}$)	C	40	pF


Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity ($I_F=20\text{mA}$) mcd		Wavelength nm	Viewing Angle
				min.	typ.		
ZMO53W-01	orange	InGaAlP	water clear	80	200	610	120°

ZMO53W-01

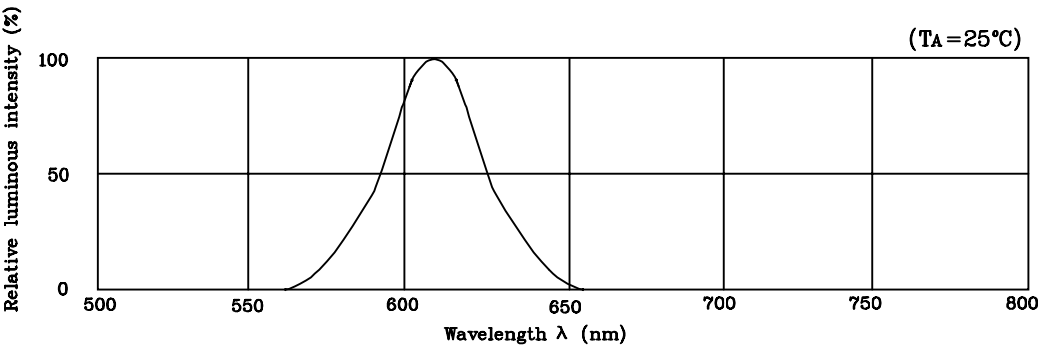


❖MO


Forward current derating curve




Forward Current Vs. Forward Voltage



Radiation Characteristics



Luminous Intensity Vs. Forward Current




ZMO53W-01

❖ SMT Reflow Soldering Instructions



❖ Recommended Soldering Pattern (Units : mm)

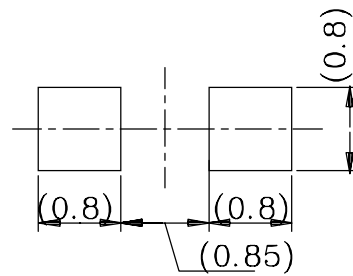

ZMO53W-01

❖ **Tape Specification (Units : mm)**

