



Z i L O G

Z8 Encore!® 64K Series

Product Brief

PB012403-0304

PRELIMINARY



Product Block Diagram

16–64KB Flash	2–4KB RAM	Up to 12 Channels 10-Bit ADC
Four 16-Bit Timers/PWM	20MHz eZ8 CPU	3-Channel DMA
Watch-Dog Timer with RC Oscillator		POR/VBO & Reset Control
SPI, I2C, 2 UARTs with IrDA	On-Chip Debugger	Crystal/RC Oscillator
Up to 60 General-Purpose I/O Pins		

Overview

The Z8 Encore!® 64K Series devices are Flash microcontrollers based on the ZiLOG® eZ8 CPU. The Z8 Encore!® 64K Series MCU family of devices sets a new standard for performance and on-chip peripherals.

The Z8 Encore!® 64K Series devices support up to 64KB of Flash (or optional ROM) program memory and 4KB register RAM

The 64K Series devices feature up to twelve channels of 10-bit A/D conversion for measuring analog signals.

These devices include up to four enhanced 16-bit timer blocks featuring PWMs and Capture and Compare.

Up to 24 vectored interrupts with programmable priorities provide increased application flexibility.

The new single-pin debugger and programming interface simplifies code development and allows for easy in-circuit programming.

Two full-duplex UARTs provides serial communications and IrDA encoding and decoding capability.

SPI and I2C ports allow easy incorporation into any system.

Features

- 20MHz eZ8 CPU core
- Up to 64KB Flash memory (or optional ROM) with in-circuit programming capability (Flash only)
- Up to 4KB register RAM
- Up to twelve channels 10-bit analog-to-digital converter (ADC)
- Two full-duplex 9-bit UARTs with bus transceiver Driver Enable Control
- I²C
- Serial peripheral interface (SPI)
- Infrared Data Association (IrDA)-compliant infrared encoder/decoders
- Up to four 16-bit timers with capture, compare, and PWM capability
- Watch-Dog Timer (WDT) with internal RC oscillator
- 3-channel DMA
- Up to 60 I/O pins depending upon package
- Up to 24 interrupts with configurable priority
- On-Chip Debugger
- Voltage Brown-out Protection (VBO)
- Power-On Reset (POR)
- Crystal oscillator with three power settings and external RC network option



- 3.0–3.6V operating voltage with 5V-tolerant inputs
- 40-, 44-, 64-, 68- and 80-pin packages
- 0° to +70°C standard temperature and -40° to +105°C extended temperature operating ranges

eZ8 CPU Features

- New instructions for improved performance including BIT, BSWAP, BTJ, CPC, LDC, LDCI, LEA, MULT, and SRL
- New instructions support 12-bit linear addressing of the Register File
- Compatible with existing Z8[®] code
- Up to 10 MIPS operation
- C-Compiler friendly
- 2-9 clock cycles per instruction

Z8 Encore![®] 64K Series Development Kit

The Z8 Encore![®] 64K Series Development Kit includes the following:

Hardware

- Z8 Encore![®] 64K Series Development board
- Smart Cable for PC to Z8 Encore![®] 64K Series Development board (DB9 to 6-pin male)
- 5VDC power supply

Software (on CD-ROM)

- ZDS II–Z8 Encore![®] IDE with ANSI C-Compiler
- Sample code
- Document Browser
- Acrobat Reader install program

Documentation

- Quick Start Guide
- Registration card
- Z8 Encore![®] 64K Series technical documentation (on CD-ROM)
 - Development Kit User Manual
 - ZDS II - IDE User Manual
 - eZ8 CPU User Manual
 - Product specification
 - Product brief
 - Application notes

Architecture

Figure 1 illustrates the Z8 Encore!® 64K Series block diagram.

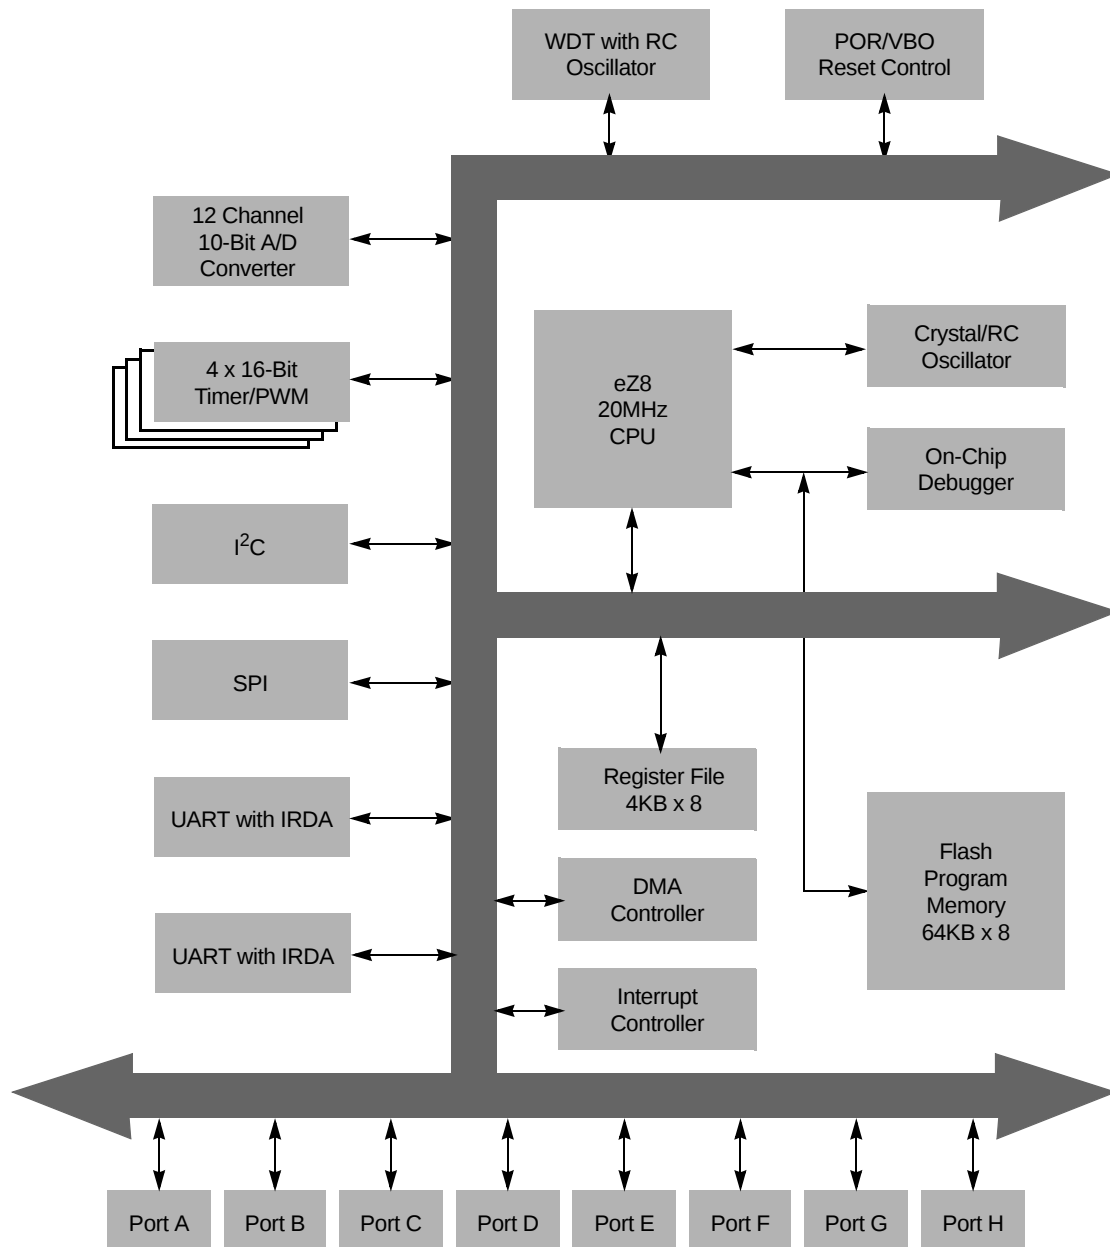


Figure 1. Z8 Encore!® 64K Series Block Diagram



Ordering Information

Order the Z8 Encore!® 64K Series from ZiLOG®, referencing the following part numbers. For more information regarding ordering, please consult your local ZiLOG® sales office. The ZiLOG® website at www.zilog.com lists all regional offices and provides additional Z8 Encore!® product information.

Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8F642x with 64KB Flash, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8F6421PM020SC	64KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F6421AN020SC	64KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F6421VN020SC	64KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F6422AR020SC	64KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F6422VS020SC	64KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8F6423FT020SC	64KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package
Extended Temperature: -40° to +105°C										
Z8F6421PM020EC	64KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F6421AN020EC	64KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F6421VN020EC	64KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F6422AR020EC	64KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F6422VS020EC	64KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8F6423FT020EC	64KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8F482x with 48KB Flash, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8F4821PM020SC	48KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F4821AN020SC	48KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F4821VN020SC	48KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F4822AR020SC	48KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F4822VS020SC	48KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8F4823FT020SC	48KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package
Extended Temperature: -40° to +105°C										
Z8F4821PM020EC	48KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F4821AN020EC	48KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F4821VN020EC	48KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F4822AR020EC	48KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F4822VS020EC	48KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8F4823FT020EC	48KB	4KB	46	24	4	12	1	1	2	QFP 80-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8F322x with 32KB Flash, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8F3221PM020SC	32KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F3221AN020SC	32KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F3221VN020SC	32KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F3222AR020SC	32KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F3222VS020SC	32KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to 105°C										
Z8F3221PM020EC	32KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F3221AN020EC	32KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F3221VN020EC	32KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F3222AR020EC	32KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F3222VS020EC	32KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8F242x with 24KB Flash, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8F2421PM020SC	24KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F2421AN020SC	24KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F2421VN020SC	24KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F2422AR020SC	24KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F2422VS020SC	24KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to 105°C										
Z8F2421PM020EC	24KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F2421AN020EC	24KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F2421VN020EC	24KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F2422AR020EC	24KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F2422VS020EC	24KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8F162x with 16KB Flash, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8F1621PM020SC	16KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F1621AN020SC	16KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F1621VN020SC	16KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F1622AR020SC	16KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F1622VS020SC	16KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to +105°C										
Z8F1621PM020EC	16KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8F1621AN020EC	16KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8F1621VN020EC	16KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F1622AR020EC	16KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8F1622VS020EC	16KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8R642x with 64KB ROM, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8R6421PM020SC	64KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R6421AN020SC	64KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R6421VN020SC	64KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8F6422AR020SC	64KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R6422VS020SC	64KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8R6423FT020SC	64KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package
Extended Temperature: -40° to +105°C										
Z8R6421PM020EC	64KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R6421AN020EC	64KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R6421VN020EC	64KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R6422AR020EC	64KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R6422VS020EC	64KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8R6423FT020EC	64KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8R482x with 48KB ROM, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8R4821PM020SC	48KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R4821AN020SC	48KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R4821VN020SC	48KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R4822AR020SC	48KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R4822VS020SC	48KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8R4823FT020SC	48KB	4KB	60	24	4	12	1	1	2	QFP 80-pin package
Extended Temperature: -40° to +105°C										
Z8R4821PM020EC	48KB	4KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R4821AN020EC	48KB	4KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R4821VN020EC	48KB	4KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R4822AR020EC	48KB	4KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R4822VS020EC	48KB	4KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8R4823FT020EC	48KB	4KB	46	24	4	12	1	1	2	QFP 80-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8R322x with 32KB ROM, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8R3221PM020SC	32KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R3221AN020SC	32KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R3221VN020SC	32KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R3222AR020SC	32KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R3222VS020SC	32KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to 105°C										
Z8R3221PM020EC	32KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R3221AN020EC	32KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R3221VN020EC	32KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R3222AR020EC	32KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R3222VS020EC	32KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package




Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8R242x with 24KB ROM, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8R2421PM020SC	24KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R2421AN020SC	24KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R2421VN020SC	24KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R2422AR020SC	24KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R2422VS020SC	24KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to 105°C										
Z8R2421PM020EC	24KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R2421AN020EC	24KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R2421VN020EC	24KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R2422AR020EC	24KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R2422VS020EC	24KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package



Part Number	Flash/ROM	RAM	I/O Lines	Interrupts	16-Bit Timers w/PWM	10-Bit A/D Channels	I ² C	SPI	UARTs with IrDA	Description
Z8R162x with 16KB ROM, 10-Bit Analog-to-Digital Converter										
Standard Temperature: 0° to 70°C										
Z8R1621PM020SC	16KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R1621AN020SC	16KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R1621VN020SC	16KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R1622AR020SC	16KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R1622VS020SC	16KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Extended Temperature: -40° to +105°C										
Z8R1621PM020EC	16KB	2KB	29	23	3	8	1	1	2	PDIP 40-pin package
Z8R1621AN020EC	16KB	2KB	31	23	3	8	1	1	2	LQFP 44-pin package
Z8R1621VN020EC	16KB	2KB	31	23	3	8	1	1	2	PLCC 44-pin package
Z8R1622AR020EC	16KB	2KB	46	24	4	12	1	1	2	LQFP 64-pin package
Z8R1622VS020EC	16KB	2KB	46	24	4	12	1	1	2	PLCC 68-pin package
Z8F64200100KIT										Development Kit



Part Number Suffix Designations

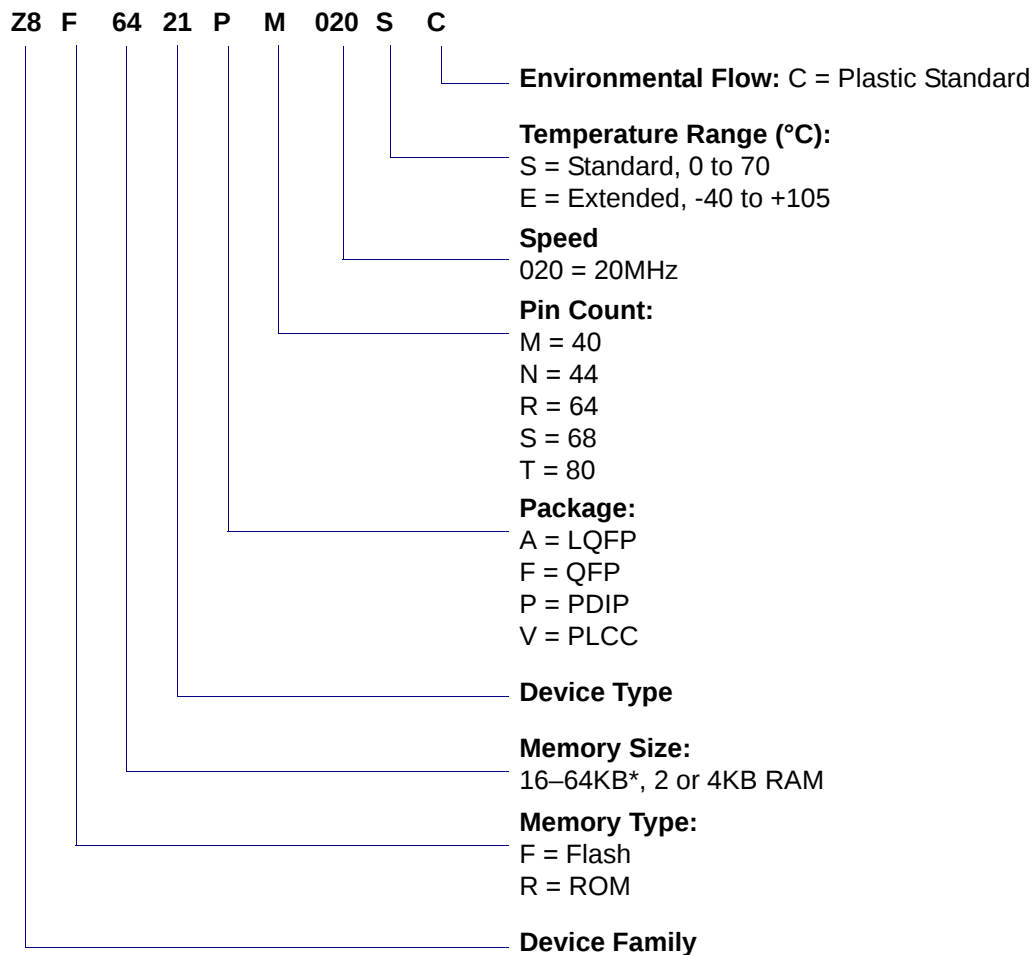

Notes:

* Not all packages are available for all memory sizes. See Ordering Information for the packages available for your requirements.



Disclaimer

©2004 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Devices sold by ZiLOG, Inc. are covered by warranty and limitation of liability provisions appearing in the ZiLOG, Inc. Terms and Conditions of Sale. ZiLOG, Inc. makes no warranty of merchantability or fitness for any purpose. Except with the express written approval of ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses are conveyed, implicitly or otherwise, by this document under any intellectual property rights.