

October 1988 Revised August 1999

74F2243

Quad Bus Transceiver with 25 Ω Series Resistors in the Outputs

General Description

The 74F2243 is a quad bus transmitter/receiver which can be used for 4-line asynchronous 2-way data communications between data busses. It is designed to drive the capacitive inputs of MOS memory drivers, address drivers, clock drivers, and bus-oriented transmitters/receivers.

The 25Ω series resistors in the outputs reduce ringing and eliminate the need for external resistors.

Features


- \blacksquare 25 Ω series resistors in outputs eliminate the need for external resistors
- 2-Way asynchronous data bus communication
- 3-STATE outputs
- 12 mA source current
- Designed to drive the capacitive inputs of MOS devices

Ordering Code:


Order Number	Package Number	Package Description
74F2243SC	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbol



Connection Diagram



Truth Table

Inputs		Inputs/Outputs			
E ₁	E ₂	A _n	B _n		
L	L	Input	B = A		
L	Н	N/A	N/A		
Н	L	Z	Z		
Н	Н	A = B	Input		

H = HIGH Voltage Level L = LOW Voltage Level Z = High Impedance N/A = Not Allowed

Unit Loading/Fan Out

Pin Names	Description	U.L.	Input I _{IH} /I _{IL}		
Fill Names	Description	HIGH/LOW	Output I _{OH} /I _{OL}		
E ₁	Enable Input (Active LOW)	1.0/1.67	20 μA/–1 mA		
E ₂	Enable Input (Active HIGH)	1.0/1.67	20 μA/–1 mA		
A _n , B _n	Inputs	3.5/2.67	70 μA/–1.6 mA		
	Outputs	750/20	-15 mA/12 mA		

Absolute Maximum Ratings(Note 1)

-65°C to +150°C

Storage Temperature -55°C to +125°C Ambient Temperature under Bias Junction Temperature under Bias -55°C to +150C V_{CC} Pin Potential to Ground Pin -0.5V to +7.0V

Input Voltage (Note 2) -0.5V to +7.0VInput Current (Note 2) -30 mA to +5.0 mA

Voltage Applied to Output in HIGH State (with $V_{CC} = 0V$)

Standard Output -0.5V to V_{CC} 3-STATE Output -0.5V to +5.5V

Current Applied to Output

in LOW State (Max) twice the rated I_{OL} (mA) ESD Last Passing Voltage (Min)

Recommended Operating Conditions

Free Air Ambient Temperature 0°C to +70°C Supply Voltage +4.5V to +5.5V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.


Note 2: Either voltage limit or current limit is sufficient to protect inputs.

DC Electrical Characteristics

Symbol	Parameter		Min	Тур	Max	Units	V _{CC}	Conditions	
V _{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal	
V _{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal	
V _{CD}	Input Clamp Diode Voltage				-1.2	V	Min	I _{IN} = -18 mA	
V _{OH}	Output HIGH	10% V _{CC}	2.4					$I_{OH} = -3 \text{ mA } (A_n, B_n)$	
	Voltage	10% V _{CC}	2.0			V	Min	$I_{OH} = -15 \text{ mA } (A_n, B_n)$	
		$5\% V_{CC}$	2.7					$I_{OH} = -3 \text{ mA } (A_n, B_n)$	
V _{OL}	Output LOW				0.50	\/	V Min	$I_{OL} = 1 \text{ mA } (A_n, B_n)$	
	Voltage				0.75			$I_{OL} = 12 \text{ mA } (A_n, B_n)$	
I _{IH}	Input HIGH Current				20	μΑ	Max	$V_{IN} = 2.7V (\overline{E}_1, \overline{E}_2)$	
I _{BVI}	Input HIGH Current				400			$V_{IN} = 7.0V (\overline{E}_1, E_2)$	
	Breakdown Test				100	μΑ	Max	$V_{IN} = 7.0V (E_1, E_2)$	
I _{BVIT}	Input HIGH Current				1.0	mA	Max	$V_{IN} = 5.5V (A_n, B_n)$	
	Breakdown Test (I/O)				1.0	IIIA	IVIAX		
I _{IL}	Input LOW Current				-1.0	mA	Max	$V_{IN} = 0.5V (\overline{E}_1, E_2)$	
I _{IH} + I _{OZH}	Output Leakage Current				70	μΑ	Max	$V_{OUT} = 2.7V (A_n, B_n)$	
I _{IL} + I _{OZL}	Output Leakage Current				-1.6	mA	Max	$V_{OUT} = 0.5V (A_n, B_n)$	
Ios	Output Short-Circuit Current		-100		-225	mA	Max	$V_{OUT} = 0V (A_n, B_n)$	
I _{CEX}	Output HIGH Leakage Current				250	μΑ	Max	$V_{OUT} = V_{CC}$	
I _{CCH}	Power Supply Current			64	80	mA	Max	V _O = HIGH	
I _{CCL}	Power Supply Current			64	90	mA	Max	$V_O = LOW$	
I _{CCZ}	Power Supply Current			71	90	mA	Max	$V_O = HIGH Z$	

AC Electrical Characteristics

Symbol	Parameter	$T_A = +25^{\circ}$ C $V_{CC} = +5.0$ V $C_L = 50 \text{ pF}$			$T_A = 0$ °C to +70°C $V_{CC} = +5.0V$ $C_L = 50 \text{ pF}$		Units		
		Min	Тур	Max	Min	Max			
t _{PLH}	Propagation Delay	1.5		7.0	1.5	7.0			
t _{PHL}	A_n to B_n , B_n to A_n	2.5		8.0	2.0	8.0	ns		
t _{PZH}	Output Enable Time	1.5		9.0	1.0	9.5			
t _{PZL}	\overline{E}_1 to B_n , E_2 to A_n	2.5		11.5	2.5	12.0	- ns		
t _{PHZ}	Output Disable Time	1.5		9.0	1.0	9.5			
t _{PLZ}	\overline{E}_1 to B_n , E_2 to A_n	1.5		8.5	1.5	9.5			

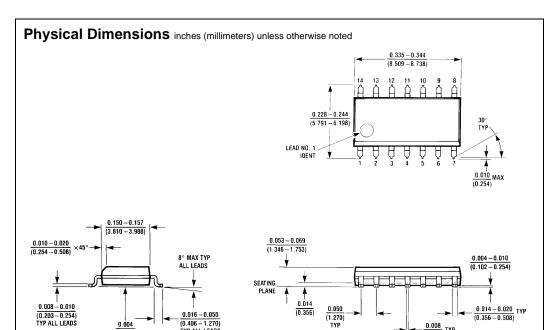

14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow Package Number M14A

0.016 - 0.050

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

(0.203-0.254) TYP ALL LEADS

0.004 (0.102) ALL LEAD TIPS

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

 $-\frac{0.008}{(0.203)}$ TYP

M14A (REV H)

www.fairchildsemi.com