


NPN Silicon Darlington Power Transistor

The BU323AP is a monolithic darlington transistor designed for automotive ignition, switching regulator and motor control applications.

• Collector–Emitter Sustaining Voltage —

$$V_{CER(sus)} = 475 \text{ Vdc}$$

- 125 Watts Capability at 50 Volts
- V_{CE} Sat Specified at –




BU323AP

DARLINGTON NPN SILICON POWER TRANSISTOR 400 VOLTS 125 WATTS

COLLECTOR

EMITTER



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V _{CEO(sus)}	400	Vdc
Collector–Emitter Voltage	V _{CEV}	475	Vdc
Emitter–Base Voltage	V _{EB}	6.0	Vdc
Collector Current — Continuous — Peak (Note 1)	I _C	10 16	Adc
Base Current — Continuous — Peak (Note 1)	I _B	3.0	Adc
Total Power Dissipation — $T_C = 25^{\circ}C$ — $T_C = 100^{\circ}C$ Derate above 25°C	P _D	125 100 1.0	Watts Watts W/°C
Operating and Storage Junction Temperature Range	T _J , T _{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{ heta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	TL	275	°C

⁽¹⁾ Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS ¹		•	-		•
Collector–Emitter Sustaining Voltage (Figure 1) L = 10 mH $(I_C = 200 \text{ mAdc}, I_B = 0, V_{clamp} = \text{Rated } V_{CEO})$	V _{CEO(sus)}	400			Vdc
Collector–Emitter Sustaining Voltage (Figure 1) (I _C = 3 A, R _{BE} = 100 Ohms, L = 500 μ H) Unclamped	V _{CER(sus)}	475			Vdc
Collector Cutoff Current (Rated V _{CER} , R _{BE} = 100 Ohms)	I _{CER}			1	mAdc
Collector Cutoff Current (Rated V _{CBO} , I _E = 0)	I _{CBO}			1	mAdc
Emitter Cutoff Current (V _{EB} = 6 Vdc, I _C = 0)	I _{EBO}			40	mAdc
ON CHARACTERISTICS ¹					
DC Current Gain	h _{FE}	300 150 50	550 350 150	2000	
Collector–Emitter Saturation Voltage $ \begin{aligned} &(I_C=3\text{ Adc, }I_B=60\text{ mAdc})\\ &(I_C=6\text{ Adc, }I_B=120\text{ mAdc})\\ &(I_C=10\text{ Adc, }I_B=300\text{ mAdc})\\ &(I_C=6\text{ Adc, }I_B=120\text{ mAdc, }T_C=-40^\circ\text{C}) \end{aligned} $	V _{CE(sat)}			1.5 1.7 2.7 2.0	Vdc
Base–Emitter Saturation Voltage (I_C = 6 Adc, I_B = 120 mAdc) (I_C = 10 Adc, I_B = 300 mAdc) (I_C = 6 Adc, I_B = 120 mAdc, T_C = -40°C)	V _{BE(sat)}			2.2 3 2.4	Vdc
Base–Emitter On Voltage (I _C = 10 Adc, V _{CE} = 6 Vdc)	V _{BE(on)}			2.5	Vdc
Diode Forward Voltage (I _F = 10 Adc)	V _f		2	3.5	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f_{test} = 100 \text{ kHz}$)	C _{ob}		165	350	pF
SWITCHING CHARACTERISTICS					
Storage Time $(V_{CC} = 12 \text{ Vdc}, I_C = 6 \text{ Adc},$	t _s		7.5	15	μs
Fall Time $I_{B1} = I_{B2} = 0.3 \text{ Adc}$) Fig. 2	t _f		5.2	15	μs
FUNCTIONAL TESTS					
Second Breakdown Collector Current with Base–Forward Biased	I _{S/B}		See Figure 10		
Pulsed Energy Test (See Figure 12)	I _C 2 _L /2	550			mJ
	•				

¹Pulse Test: Pulse Width = 300 μ s, Duty Cycle = 2%.

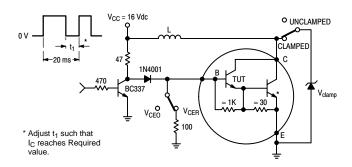


Figure 1. Sustaining Voltage Test Circuit

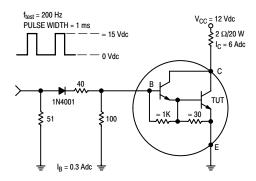


Figure 2. Switching Times Test Circuit

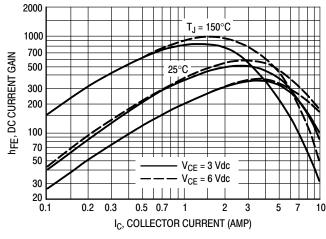


Figure 3. DC Current Gain

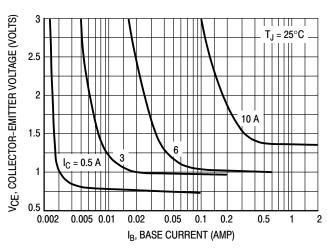


Figure 4. Collector Saturation Region

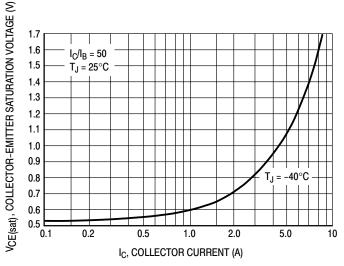


Figure 5. Collector-Emitter Saturation Voltage

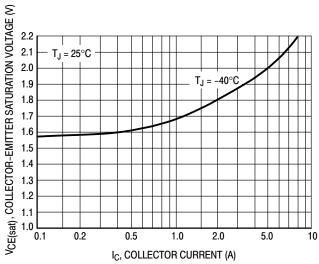


Figure 6. Base-Emitter Voltage

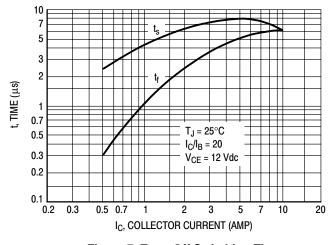


Figure 7. Turn-Off Switching Time

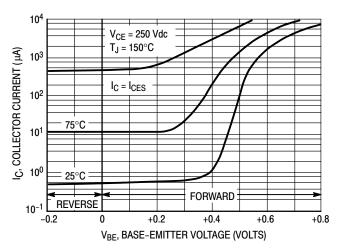


Figure 8. Collector Cutoff Region

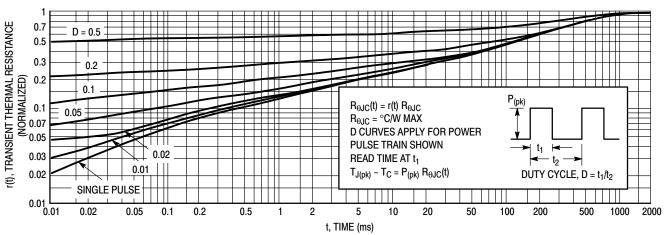


Figure 9. Thermal Response

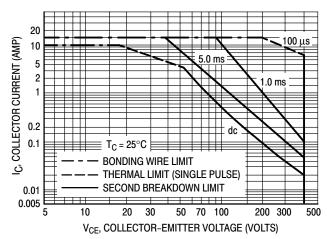


Figure 10. Forward Bias Safe Operating Area


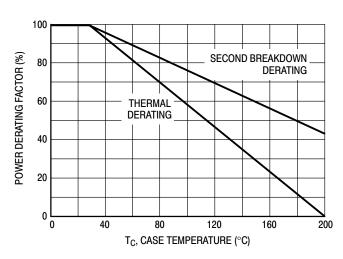


Figure 11. Power Derating

There are two limitations on the power handling ability of a transistor average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_C = 25^{\circ}C$, $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \ge 25^{\circ}C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 11.

 $T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

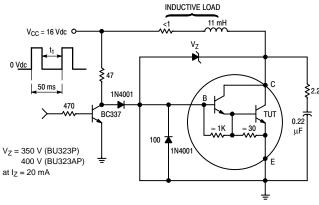


 t_{1} to be selected such that I_{C} reaches 10 Adc before switch–off.

NOTE: Figure 12 specifies energy handling capabilities in an automotive ignition circuit.

Figure 12. Ignition Test Circuit

PACKAGE DIMENSIONS CASE 340D-02 **TO-218 TYPE ISSUE E**

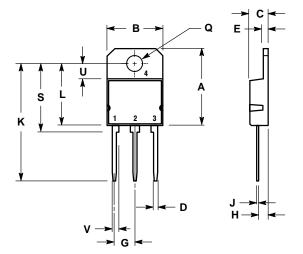

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.

	MILLIMETERS		INCHES		
DIM	MIN	MAX	MIN	MAX	
Α		20.35		0.801	
В	14.70	15.20	0.579	0.598	
С	4.70	4.90	0.185	0.193	
D	1.10	1.30	0.043	0.051	
E	1.17	1.37	0.046	0.054	
G	5.40	5.55	0.213	0.219	
Н	2.00	3.00	0.079	0.118	
J	0.50	0.78	0.020	0.031	
K	31.00	REF	1.220 REF		
L		16.20		0.638	
Q	4.00	4.10	0.158	0.161	
S	17.80	18.20	0.701	0.717	
U	4.00 REF		0.157 REF		
V	1 75 RFF		0.069		

- STYLE 1:
 PIN 1. BASE
 2. COLLECTOR
 3. EMITTER
 4. COLLECTOR

Notes

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax:** 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: ONlit@hibbertco.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031

Phone: 81–3–5740–2700 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local

Sales Representative.