


CCFL Driving Inverter Transformer

INT001T TYPE (EER22)

Mechanical Dimension:Unit:mm

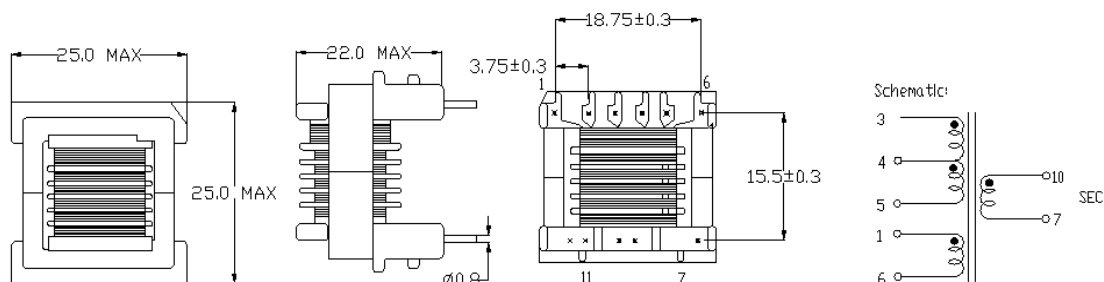


Characteristic(reference)

PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT001T-1	17.0	30-80	18.0	2000	75-80
INT001T-2	17.0	30-80	18.0	2150	75-80

INT002T TYPE (EPC25)

Mechanical Dimension:Unit:mm

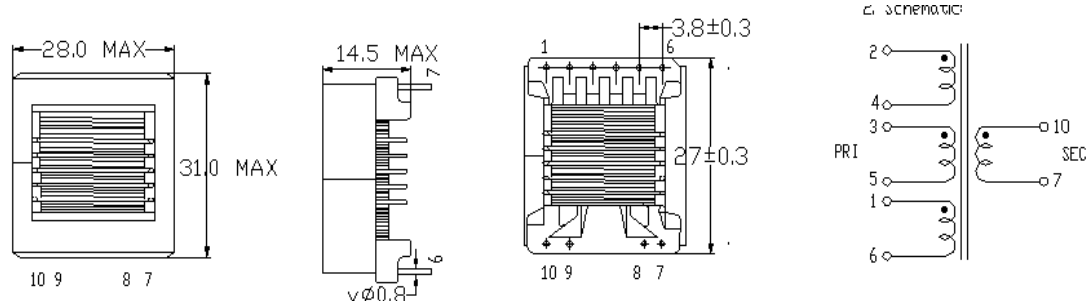

Characteristic(reference)

PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT002T-1	24.0	30-80	12.0	1500	75-80



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.

HTTP://WWW.XINWANGELE.COM

TEL:0755-29696626 FAX:0755-27289711

E-mail:sales@xinwangele.com