


CCFL Driving Inverter Transformer

INT009S TYPE (EPC7.6*20)

Mechanical Dimension:Unit:mm

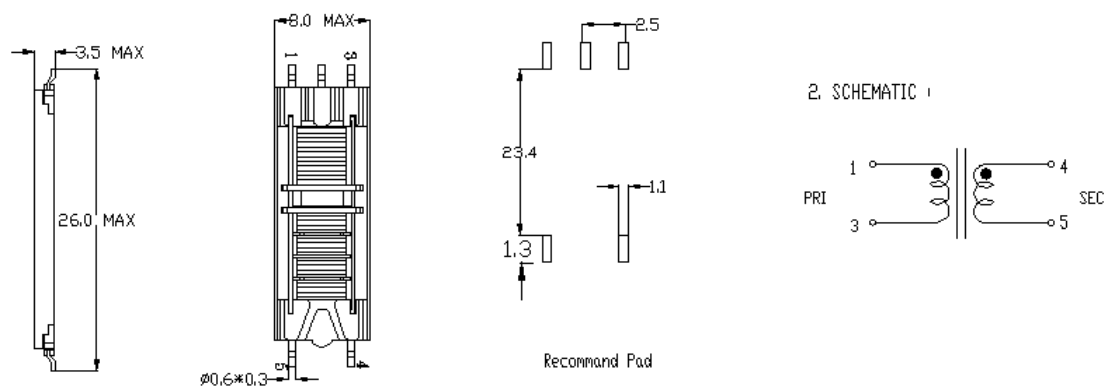


Characteristic (reference)

PART NO.	INPUT VOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT009S-1	38243.0	50-200	1.5	1600	80

INT010S TYPE (EPC18)

Mechanical Dimension:Unit:mm

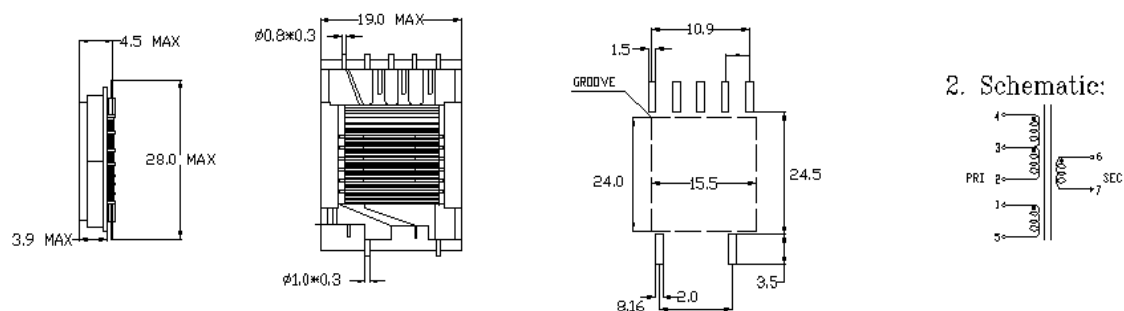

Characteristic (reference)

PART NO.	INPUT VOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT010S-1	9.0	30-80	1.2	1350	80-85



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.

HTTP://WWW.XINWANGELE.COM

TEL:0755-29696626 FAX:0755-27289711

E-mail:sales@xinwangele.com