


5 Amp Low Dropout Positive Voltage Regulator

The PJ1084 Series are high performance positive voltage regulators designed for use in applications requiring low dropout performance at full rated current. Additionally, the PJ1084 Series provides excellent regulation over variations due to changes in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The PJ1084 Series are three terminal regulators with fixed and adjustable voltage options available in popular packages.

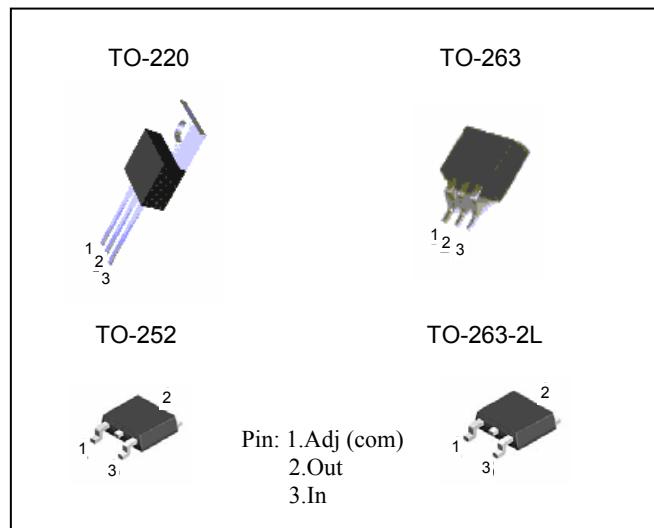

FEATURES


- Low dropout performance 1.3V max.
- Full current rating over line and temperature
- Fast transient response
- Total output regulation $\pm 2\%$ over line, load and temperature
- Adjust pin current max $120 \mu A$ over temperature
- Line regulation typical 0.015%.
- Load regulation typical 0.05%.
- Fixed/adjustable output voltage
- TO-220 & TO-263 & TO-263-2L & TO-252 package

ORDERING INFORMATION

Device	Operating Temperature (Ambient)	Package
PJ1084CZ	-20°C to +85°C	TO-220
PJ1084CZ-2.5		TO-263
PJ1084CZ-3.3		TO-263-2L
PJ1084CP		TO-252

NOTE: Contact factory for additional voltage option.

BLOCK

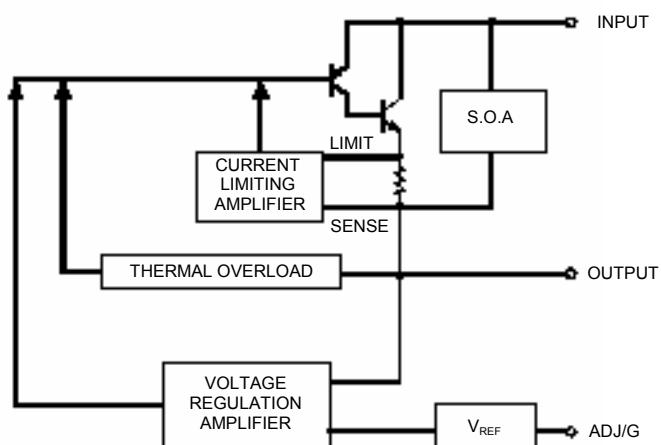

5 Amp Low Dropout Positive Voltage Regulator

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Maximum	Units
Input Voltage	V _{IN}	12	V
Power Dissipation	P _D	Internally Limited	W
Thermal Resistance Junction to Case	θ _{JC}	2.5	°C/W
Thermal Resistance Junction to Ambient	θ _{JA}	50	
Operating Junction Temperature Range	T _J	0 to +125	°C
Operating Ambient Temperature Range	T _A	-20 to +85	
Storage Temperature Range	T _{STG}	-25 to 150	
Lead Temperature (Soldering) 10 Sec.	T _{LEAD}	260	

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Adjust V_{IN} = 2.75V to 12V and Adjust I_O = 10mA to 5.0A
 Fixed V_{IN} = 4.75V to 12V and Fixed I_O = 10mA to 5.0A


Parameter	Symbol	Test Conditions			Test Limits			Units			
		V _{IN} - V _{OUT}	I _O	T _J ⁽⁴⁾	Min	Typ	Max				
Output Voltage ⁽¹⁾ Fixed Voltage	V _O	5V	10mA	25	0.99 Vol	Vo	1.01 Vol	V			
				Over Temp.	0.98 Vol		1.02 Vol				
Reference Voltage ⁽¹⁾ Adj Voltage	V _{REF}	5V	10mA	25	1.238	1.250	1.262	%			
				Over Temp.	1.225		1.275				
Line Regulation ⁽¹⁾ (Vin-Vout=3V)	REG _(LINE)		10mA	25			0.015	%			
				Over Temp.			0.035				
Load Regulation ⁽¹⁾ (Vin-Vout=3V)	REG _(LOAD)			25			0.05				
				Over Temp.			0.2				
Dropout Voltage Δ V _{REF} =1%	V _D			25			1	V			
				Over Temp.			1.1				
Current Limit (Vin-Vout=5V)	I _C _L			Over Temp.			5.5	A			
							6.5				
Quiescent Current Fixed Model	I _Q	5V					12	mA			
							0.005				
Temperature Coefficient	T _C						0.005	%/°C			
							55				
Adjust Pin Current	I _{ADJ}			25			120	μA			
				Over Temp.			0.2				
Adjust Pin Current Change	Δ I _{ADJ}						5				
							0.5				
Temperature Stability	T _S	5V	500mA	Over Temp.			10	mA			
							0.003				
Minimum Load Current Adjust Model	I _O	5V					0.5	%			
							5				
RMS Output Noise ⁽²⁾	V _N	5V	5.0A	25			72	dB			
				Over Temp.			60				

(1)Low duty cycle pulse testing with Kelvin connections required.


(2)Bandwidth of 10Hz to 10KHz.

(3)120Hz input ripple (C_{ADJ} for ADJ)=25μF .

(4)Over Temp.-over specified operating junction temperature range.






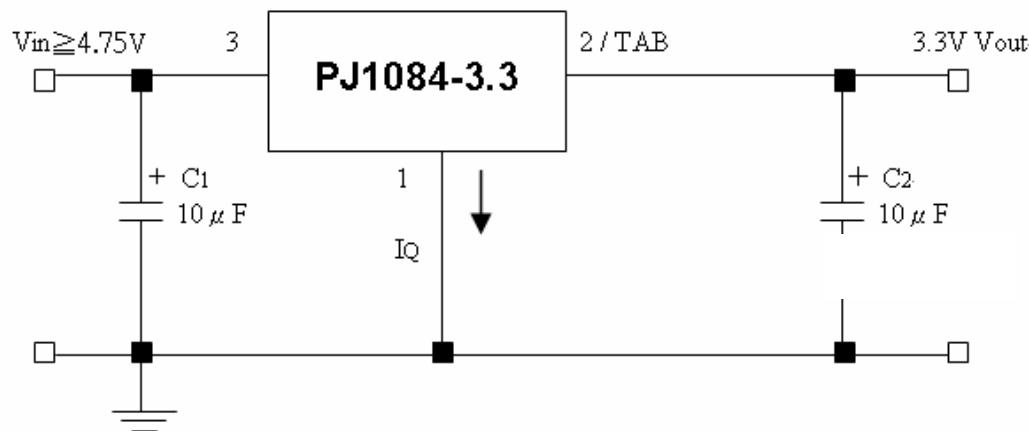
5 Amp Low Dropout Positive Voltage Regulator**Typical Application Circuit****FIXED VOLTAGE REGULATOR (1)(2)**




- (1) C_1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS
 (2) C_2 REQUIRED FOR STABILITY

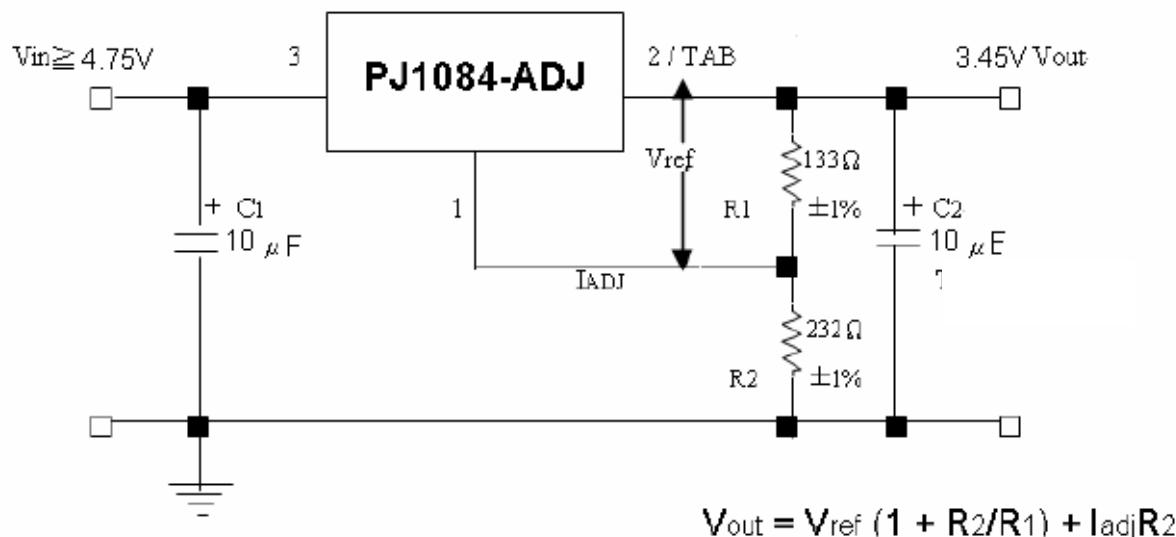ADJUSTABLE VOLTAGE REGULATOR (1)(2)


- (1) C_1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS
 (2) C_2 REQUIRED FOR STABILITY

5 Amp Low Dropout Positive Voltage Regulator

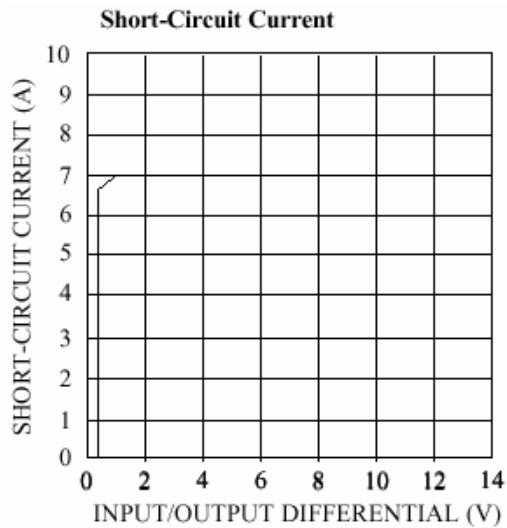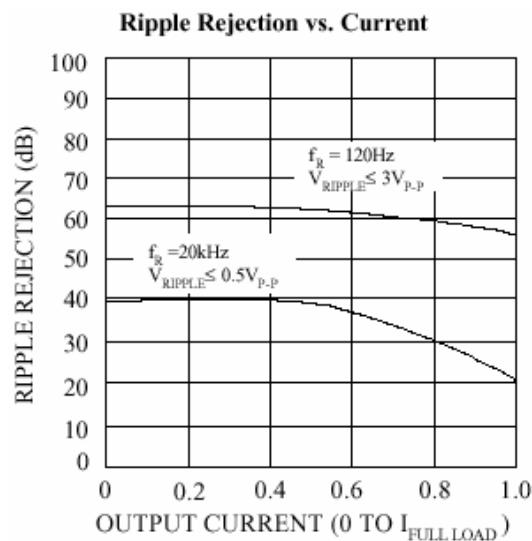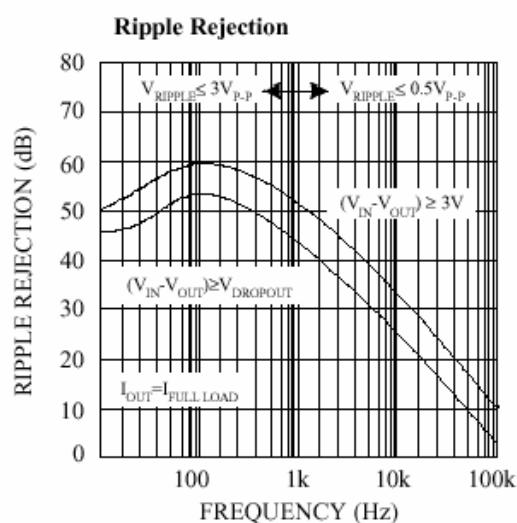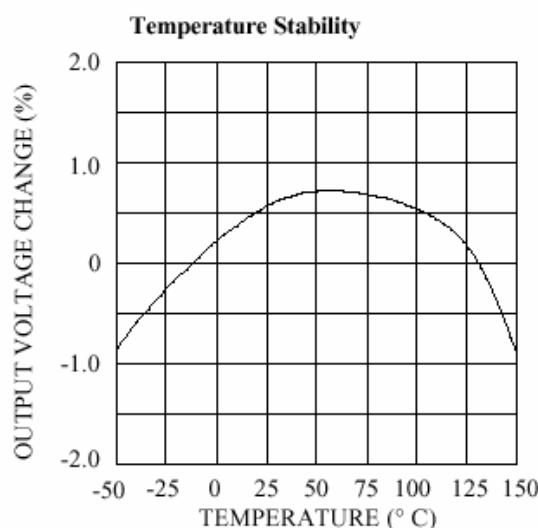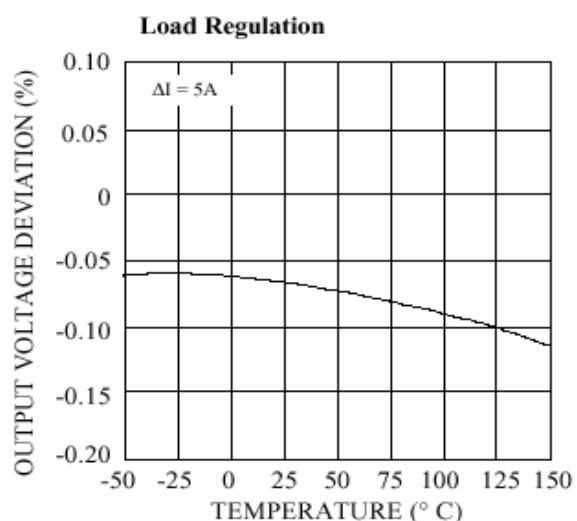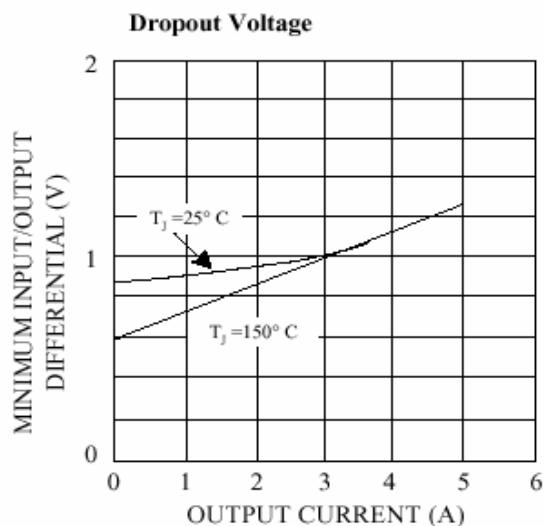


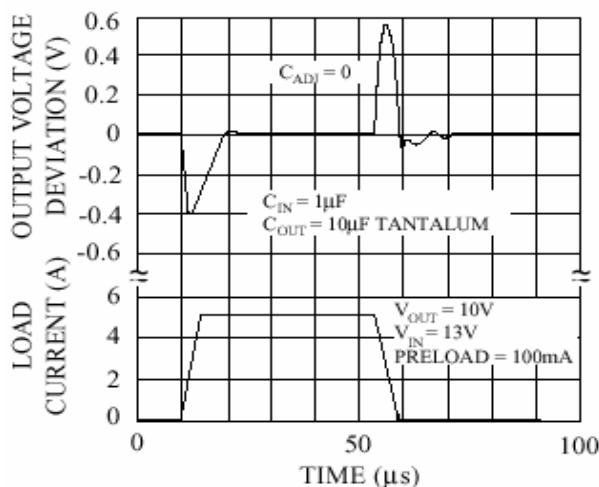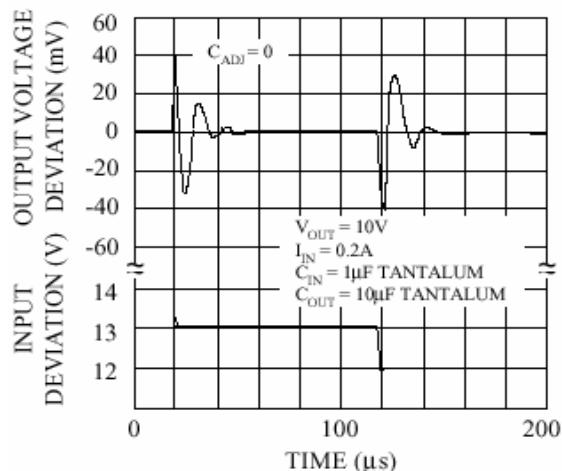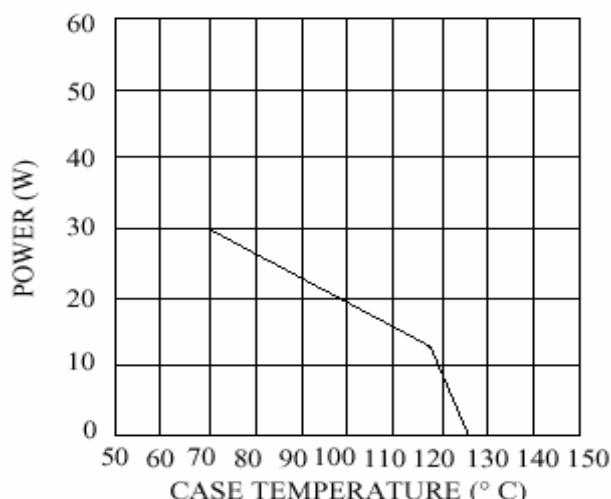
5 Amp Low Dropout Positive Voltage Regulator**Load Transient Response****Line Transient Response****Maximum Power Dissipation***

*AS LIMITED BY MAXIMUM JUNCTION TEMPERATURE

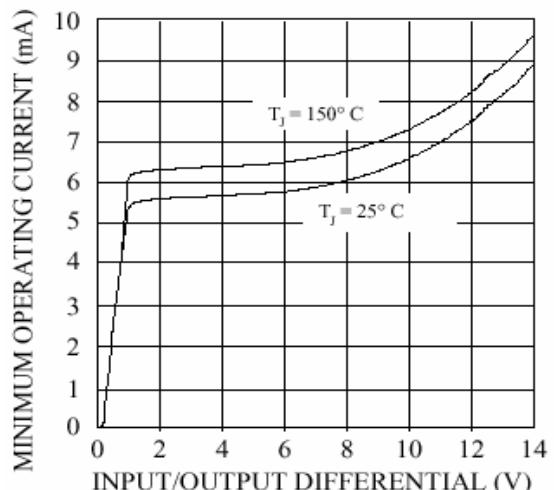
**Minimum Operating Current
(Adjustable only)****Adjust Pin Current**

(Adjustable only)

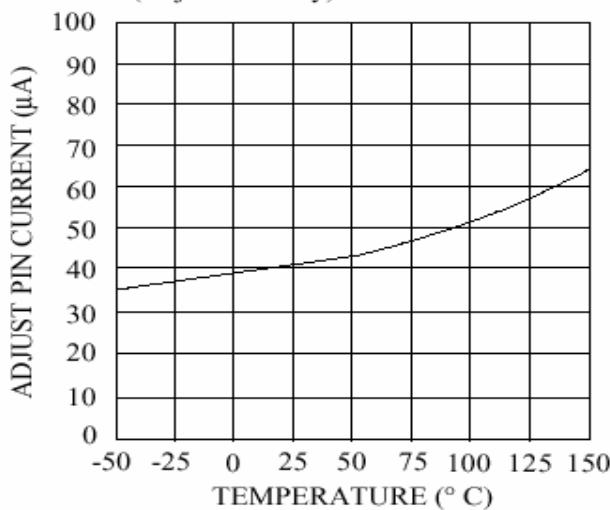

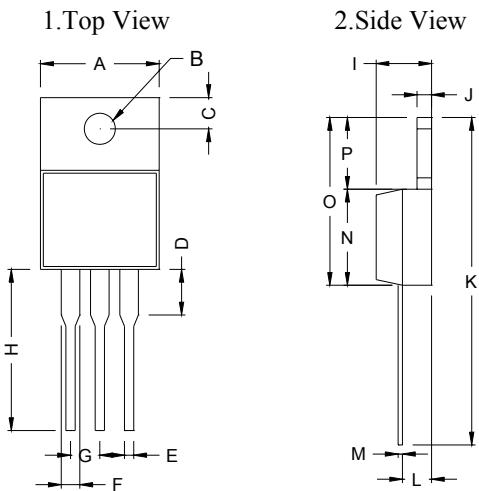5 Amp Low Dropout Positive Voltage Regulator**TO-220 Mechanical drawing****TO-220 Unit : mm**


DIM	TO-220 DIMENSION			
	MILLIMETERS	INCHES	MILLIMETERS	INCHES
A	10.00	0.394	10.50	0.413
B	3.24	0.128	4.44	0.175
C	2.44	0.096	2.94	0.116
D	3.565	0.140	4.315	0.170
E	0.68	0.027	0.92	0.036
F	1.115	0.044	1.485	0.058
G	2.345	0.092	2.715	0.107
H	13.49	0.531	14.31	0.563
I	4.475	0.176	5.225	0.206
J	1.15	0.045	1.39	0.055
K	27.78	1.094	29.62	1.166
L	2.175	0.086	2.925	0.115
M	0.297	0.012	0.477	0.019
N	8.28	0.326	8.80	0.346
O	14.29	0.563	15.31	0.603
P	6.01	0.237	6.51	0.256

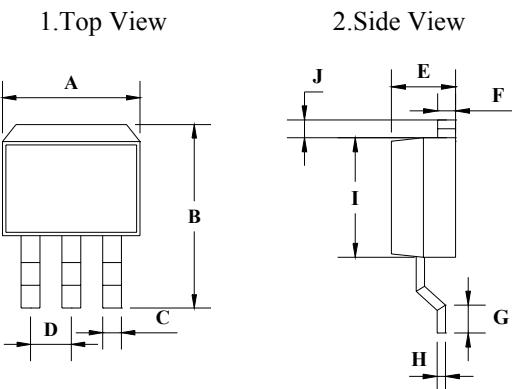TO-263 Mechanical drawing**TO-263 Unit : mm**


DIM	TO-263 DIMENSION			
	MILLIMETERS	INCHES	MILLIMETERS	INCHES
A	10.00	0.394	10.50	0.413
B	14.60	0.575	15.87	0.625
C	0.68	0.027	0.92	0.036
D	2.42	0.095	2.66	0.105
E	4.31	0.170	4.83	0.190
F	1.14	0.045	1.40	0.055
G	2.28	0.090	2.79	0.110
H	0.45	0.018	0.73	0.029
I	8.28	0.326	8.80	0.346
J	1.14	0.045	1.4	0.055

5 Amp Low Dropout Positive Voltage Regulator**TO-252 Mechanical drawing****TO-252 Unit : mm**

1.Top View

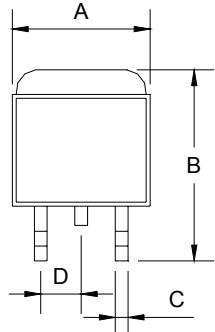


2.Side View

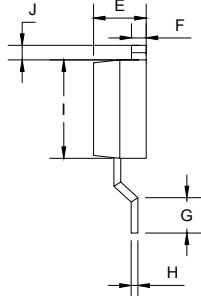


TO-252 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	6.57	6.84	0.259	0.269
B	9.25	10.40	0.364	0.409
C	0.62	0.76	0.024	0.030
D	2.56	2.67	0.101	0.105
E	2.30	2.39	0.090	0.094
F	0.49	0.57	0.019	0.022
G	1.46	1.58	0.057	0.062
H	0.52	0.57	0.020	0.022
I	5.34	5.55	0.210	0.219
J	1.46	1.64	0.057	0.065

TO-263-2L Mechanical drawing**TO-263-2L Unit : mm**

1.Top View

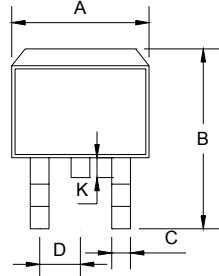

2.Side View

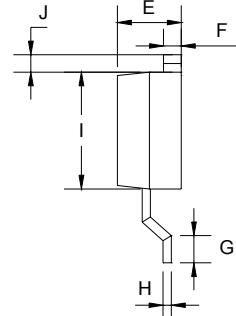

TO-263-2L DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.00	10.50	0.394	0.413
B	14.60	15.58	0.575	0.625
C	0.68	0.92	0.027	0.036
D	2.42	2.66	0.095	0.105
E	4.31	4.83	0.170	0.190
F	1.14	1.40	0.045	0.055
G	2.28	2.79	0.090	0.110
H	0.45	0.73	0.018	0.029
I	8.28	8.80	0.326	0.346
J	1.14	1.40	0.045	0.055
K	1.48	1.52	0.058	0.060