

UTC3308 LINEAR INTEGRATED CIRCUIT


SINGLE-SUPPLY DUAL HIGH CURRENT OPERATIONAL AMPLIFIER

DESCRIPTION


The UTC 3308 integrated circuit is a high gain, high output current, high output voltage swing dual operational amplifier capable of driving 150mA, specially for CD ROM, DVD devices.

FEATURES

- *Single Supply
- *Operating Voltage (+3V~+15V) ($\pm 1.5V \sim \pm 7.5V$)
- *High Output Current (150mA)
- *High Frequency Noise Rejection
- *Internal Enhanced Frequency Compensation

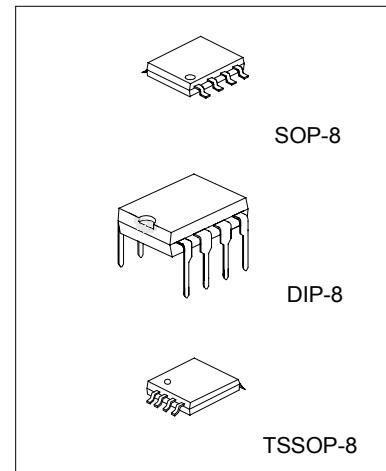

PIN CONFIGURATIONS

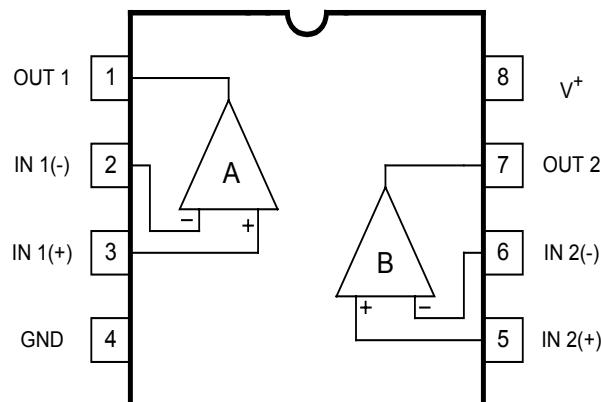

UTC3308 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V_+	15V / $\pm 7.5\text{V}$	V
Differential Input Voltage	V_{ID}	15	V
Input Voltage	V_I	-0.3 ~ +15	V
Power Dissipation	P_D	300	mW
Operating Temperature	T_{opr}	-20 to +75	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V^+=5\text{V}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$R_S=0\Omega$		2	5	mV
Input Offset Current	I_{IO}			5	100	nA
Input Bias Current	I_B			100	500	nA
Large Signal Voltage Gain	A_V	$R_L=2\text{k}\Omega$	88	100		dB
Input Common Mode Voltage Range	V_{ICM}		V^+-2			V
Maximum Output Voltage Swing 1	V_{OM1}	$R_L>=2\text{k}\Omega$	3.5			V
Maximum Output Voltage Swing 2	V_{OM2}	$I_O=70\text{mA}$	3.2			V
Common Mode Rejection Ratio	CMR		80	90		dB
Supply Voltage Rejection Ratio	SVR		80	90		dB
Operating Current	I_{CC}	$R_L=\infty$	3	4	5	mA
Slew Rate	SR			1.0		$\text{V}/\mu\text{s}$
Unity Gain Bandwidth	GB			1.3		MHz
Operating Voltage Range	V^+				15	V