




CCFL Driving Inverter Transformer

INT019 SYPE(UI11.7)

Mechanical Dimension:Unit:mm

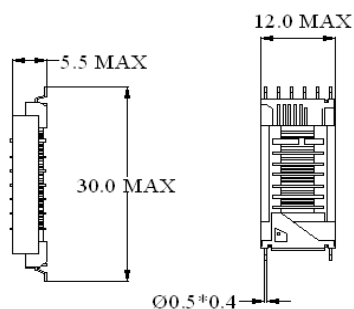




Recommand Pad

Characteristic(reference)

PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT019S-1	12.0	30-150	6.0	1600	83

INT020S TYPE(UI1024)

Mechanical Dimension:Unit:mm

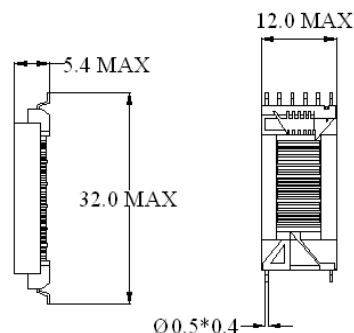

Recommand Pad

Characteristic(reference)

PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT020S-1	8.0	30-150	4.5	1600	80



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.

HTTP://WWW.XINWANGELE.COM

TEL:0755-29696626 FAX:0755-27289711

E-mail:sales@xinwangele.com