




CCFL Driving Inverter Transformer

INT026S TYPE(UI8.3)

Mechanical Dimension:Unit:mm

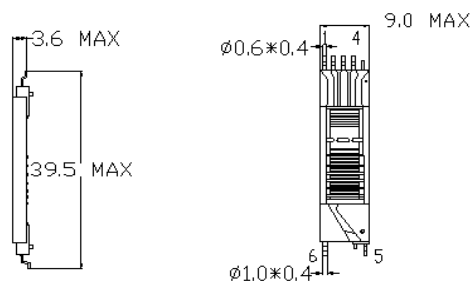

Schematic:





Recommand Pad

Characteristic(reference)


PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT026S-1	10.0	150 MAX	3.5	1500	75-80

INT027S TYPE(UI9.8)

Mechanical Dimension:Unit:mm

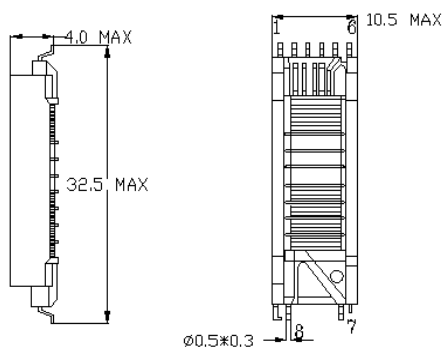

Schematic:



Recommand Pad

Characteristic(reference)

PART NO.	INPUTVOLTAGE (Vdc)	SUITABLE FREQUENCY (KHZ)	MAX. LAMP WATTE (W)	MAX. OPEN VOLTAGE (Vrms)	EFFICIENCY (%)
INT027S-1	5.0	150 MAX	5.0	1700	75-80



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.

HTTP://WWW.XINWANGELE.COM

TEL:0755-29696626 FAX:0755-27289711

E-mail:sales@xinwangele.com