



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDW-110-003 REV: 1.1

20mm Round Big LED Lamp

MODEL NO : EL-1100ID

ECN : Page: 1/5

■ Features :

- Graphic stacking allow-able.
- High luminous intensity.
- Solid state reliability.

■ Applications:

- Audio equipment
- Instrument panels

■ Description :

- The EL-1100 series consists of 20.0mm diameter big lamps.design for viewing distances up to 7 meters.
- There are separate anodes and cathodes for each light segment and choice of five colors is offered.
- These device are available with red offering a wide possibility in design.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
EL-1100ID	GaAsP/GaP	Hi-Eff Red	*****

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDW-110-003

REV: 1.1


20mm Round Big LED Lamp

MODEL NO : EL-1100ID

ECN :

Page: 2/5

■ Package Dimension:

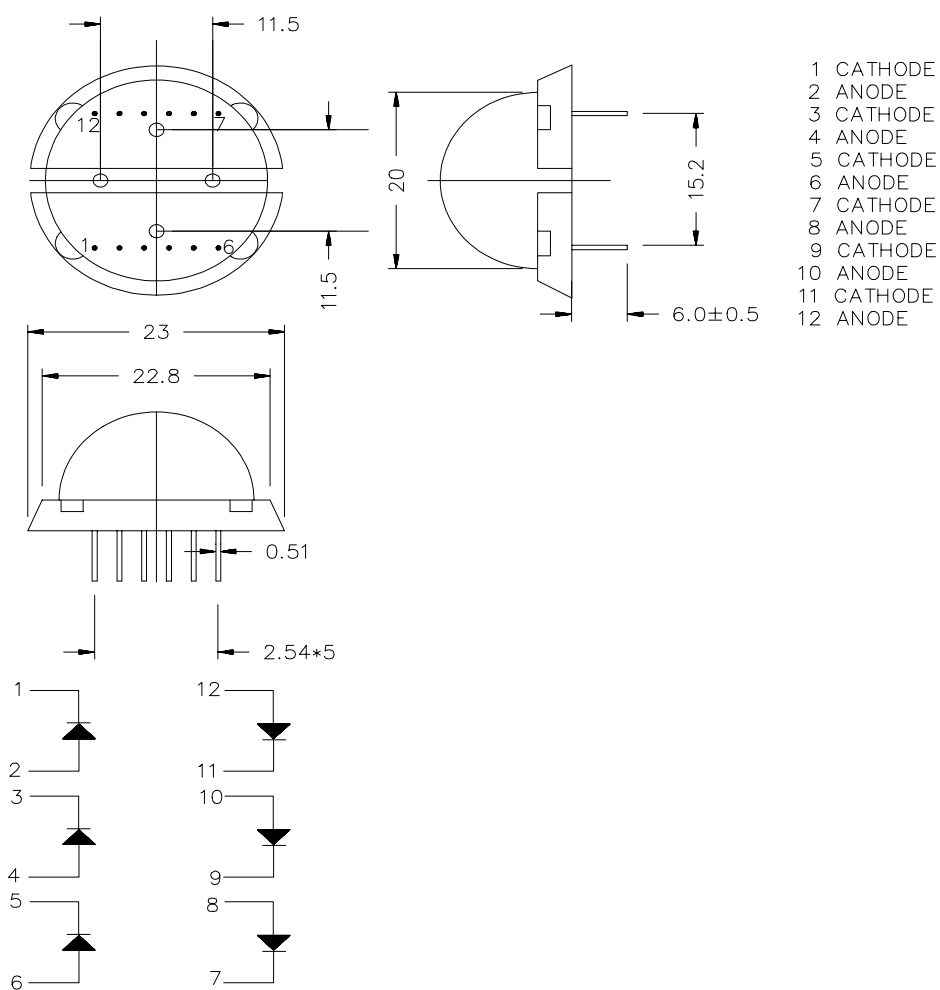

■ NOTES:

1.All dimensions are millimeters tolerance is 0.25mm unless otherwise noted.

2.Above specification may be changed without notice.

Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDW-110-003 REV: 1.1

20mm Round Big LED Lamp

MODEL NO : EL-1100ID ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	11.0	25.0	----	mcd	If=10mA
Peak Wavelength	λ_p	----	635	----	nm	If=20mA
Dominant Wavelength	λ_d	----	625	----	nm	If=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$	----	45	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.6	V	If=20mA
Reverse Current	Ir	----	----	10	μA	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDW-110-003

REV: 1.1

20mm Round Big LED Lamp

MODEL NO : EL-1100ID

ECN :

Page: 4/5

■ Reliability test item and condition:					
NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDW-110-003

REV: 1.1

20mm Round Big LED Lamp

MODEL NO: EL-1100ID

ECN:

Page: 5/5

Typical Electro-Optical Characteristic Curves:

