


- All the data listed in this catalogue are for reference only,TAI-TECH reserves the right to alter or revise the specifications without prior notification.

■ WHI 3225 Series

Part Number	Inductance (μ H)	Q min.	Test Frequency (MHz)	SRF (MHz) min.	DC Resistance (ohm) max.	Rated Current (mA)
WHI3225-1R0□	1.0	10	7.96	100	0.16	850
WHI3225-1R5□	1.5	10	7.96	80	0.25	700
WHI3225-2R2□	2.2	10	7.96	68	0.30	600
WHI3225-3R3□	3.3	10	7.96	54	0.43	500
WHI3225-4R7□	4.7	15	7.96	46	0.70	430
WHI3225-6R8□	6.8	15	7.96	38	0.80	360
WHI3225-100□	10	15	2.52	30	1.10	300
WHI3225-150□	15	15	2.52	26	1.50	250
WHI3225-220□	22	15	2.52	19	1.90	210
WHI3225-330□	33	15	2.52	17	3.00	150
WHI3225-470□	47	15	2.52	13	3.80	120
WHI3225-680□	68	15	2.52	11	7.00	100

NOTE: □ :TOLERANCE J: +/-5% K: +/-10%

■ Impedance - Frequency Characteristics

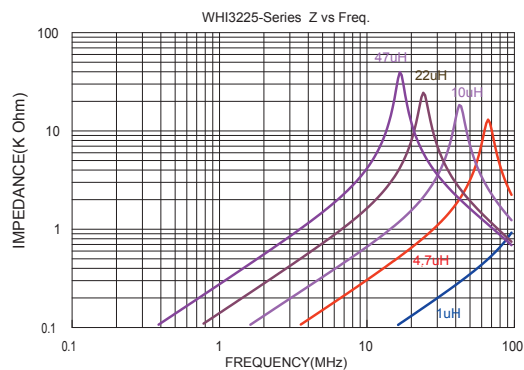

■ Inductance - DC Current Characteristics

