

## 74VCX162244

### Low Voltage 16-Bit Buffer/Line Driver with 3.6V Tolerant Inputs and Outputs and 26Ω Series Resistor in Outputs

#### General Description

The VCX162244 contains sixteen non-inverting buffers with 3-STATE outputs to be employed as a memory and address driver, clock driver, or bus oriented transmitter/receiver. The device is nibble (4-bit) controlled. Each nibble has separate 3-STATE control inputs which can be shorted together for full 16-bit operation.

The 74VCX162244 is designed for low voltage (1.65V to 3.6V)  $V_{CC}$  applications with I/O capability up to 3.6V. The 74VCX162244 is also designed with 26Ω series resistors in the outputs. This design reduces line noise in applications such as memory address drivers, clock drivers, and bus transceivers/transmitters.

The 74VCX162244 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining low CMOS power dissipation.

#### Features

- 1.65V–3.6V  $V_{CC}$  supply operation
- 3.6V tolerant inputs and outputs
- 26Ω series resistors in outputs
- $t_{PD}$ 
  - 3.3 ns max for 3.0V to 3.6V  $V_{CC}$
  - 3.8 ns max for 2.3V to 2.7V  $V_{CC}$
  - 7.6 ns max for 1.65V to 1.95V  $V_{CC}$
- Power-off high impedance inputs and outputs
- Supports live insertion and withdrawal
- Static Drive ( $I_{OH}/I_{OL}$ )
  - ±12 mA @ 3.0V  $V_{CC}$
  - ±8 mA @ 2.3V  $V_{CC}$
  - ±3 mA @ 1.65V  $V_{CC}$
- Uses patented noise/EMI reduction circuitry
- Latch-up performance exceeds 300 mA
- ESD performance:
  - Human body model > 2000V
  - Machine model > 200V
- Also packaged in plastic Fine-Pitch Ball Grid Array (FBGA)

**Note 1:** To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pull-up resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.


#### Ordering Code:

| Order Number            | Package Number | Package Description                                                                 |
|-------------------------|----------------|-------------------------------------------------------------------------------------|
| 74VCX162244GX (Note 2)  | BGA54A         | 54-Ball Fine-Pitch Ball Grid Array (FBGA), JEDEC MO-205, 5.5mm Wide [TAPE and REEL] |
| 74VCX162244MTD (Note 3) | MTD48          | 48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide         |

**Note 2:** BGA package available in Tape and Reel only.

**Note 3:** Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.


#### Logic Symbol

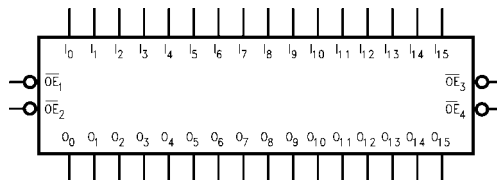


74VCX162244 Low Voltage 16-Bit Buffer/Line Driver with 3.6V Tolerant Inputs and Outputs and 26Ω Series Resistor in Outputs

## Connection Diagrams

Pin Assignment for TSSOP

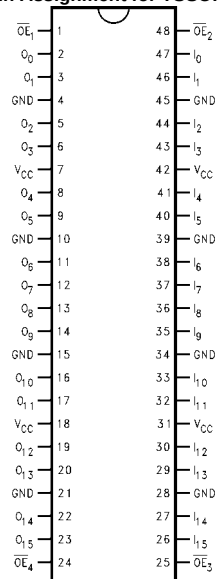

Pin Assignment for FBGA



(Top Thru View)

## Pin Descriptions

| Pin Names         | Description                      |
|-------------------|----------------------------------|
| $\overline{OE}_n$ | Output Enable Input (Active LOW) |
| $I_0-I_{15}$      | Inputs                           |
| $O_0-O_{15}$      | Outputs                          |
| NC                | No Connect                       |

## FBGA Pin Assignments

|          | 1        | 2        | 3                 | 4                 | 5        | 6        |
|----------|----------|----------|-------------------|-------------------|----------|----------|
| <b>A</b> | $O_0$    | NC       | $\overline{OE}_1$ | $\overline{OE}_2$ | NC       | $I_0$    |
| <b>B</b> | $O_2$    | $O_1$    | NC                | NC                | $I_1$    | $I_2$    |
| <b>C</b> | $O_4$    | $O_3$    | $V_{CC}$          | $V_{CC}$          | $I_3$    | $I_4$    |
| <b>D</b> | $O_6$    | $O_5$    | GND               | GND               | $I_5$    | $I_6$    |
| <b>E</b> | $O_8$    | $O_7$    | GND               | GND               | $I_7$    | $I_8$    |
| <b>F</b> | $O_{10}$ | $O_9$    | GND               | GND               | $I_9$    | $I_{10}$ |
| <b>G</b> | $O_{12}$ | $O_{11}$ | $V_{CC}$          | $V_{CC}$          | $I_{11}$ | $I_{12}$ |
| <b>H</b> | $O_{14}$ | $O_{13}$ | NC                | NC                | $I_{13}$ | $I_{14}$ |
| <b>J</b> | $O_{15}$ | NC       | $\overline{OE}_4$ | $\overline{OE}_3$ | NC       | $I_{15}$ |

## Truth Tables

| Inputs            |           | Outputs   |
|-------------------|-----------|-----------|
| $\overline{OE}_1$ | $I_0-I_3$ | $O_0-O_3$ |
| L                 | L         | L         |
| L                 | H         | H         |
| H                 | X         | Z         |

| Inputs            |           | Outputs   |
|-------------------|-----------|-----------|
| $\overline{OE}_2$ | $I_4-I_7$ | $O_4-O_7$ |
| L                 | L         | L         |
| L                 | H         | H         |
| H                 | X         | Z         |

| Inputs            |              | Outputs      |
|-------------------|--------------|--------------|
| $\overline{OE}_3$ | $I_8-I_{11}$ | $O_8-O_{11}$ |
| L                 | L            | L            |
| L                 | H            | H            |
| H                 | X            | Z            |

| Inputs            |                 | Outputs         |
|-------------------|-----------------|-----------------|
| $\overline{OE}_4$ | $I_{12}-I_{15}$ | $O_{12}-O_{15}$ |
| L                 | L               | L               |
| L                 | H               | H               |
| H                 | X               | Z               |


H = HIGH Voltage Level  
 L = LOW Voltage Level  
 X = Immaterial (HIGH or LOW, inputs may not float)  
 Z = High Impedance

## Functional Description

The 74VCX162244 contains sixteen non-inverting buffers with 3-STATE outputs. The device is nibble (4 bits) controlled with each nibble functioning identically, but independent of each other. The control pins may be shorted together to obtain full 16-bit operation. The 3-STATE out-

puts are controlled by an Output Enable ( $\overline{OE}_n$ ) input. When  $\overline{OE}_n$  is LOW, the outputs are in the 2-state mode. When  $\overline{OE}_n$  is HIGH, the standard outputs are in the high impedance mode but this does not interfere with entering new data into the inputs.

## Logic Diagram

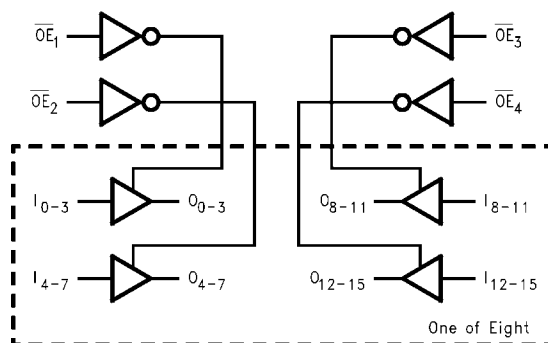

**Absolute Maximum Ratings** (Note 4)

|                                                |                          |
|------------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )                    | –0.5V to +4.6V           |
| DC Input Voltage ( $V_I$ )                     | –0.5V to +4.6V           |
| Output Voltage ( $V_O$ )                       |                          |
| Outputs 3-STATE                                | –0.5V to +4.6V           |
| Outputs Active (Note 5)                        | –0.5V to $V_{CC} + 0.5V$ |
| DC Input Diode Current ( $I_{IK}$ ) $V_I < 0V$ | –50 mA                   |
| DC Output Diode Current ( $I_{OK}$ )           |                          |
| $V_O < 0V$                                     | –50 mA                   |
| $V_O > V_{CC}$                                 | +50 mA                   |
| DC Output Source/Sink Current                  |                          |
| ( $I_{OH}/I_{OL}$ )                            | $\pm 50$ mA              |
| DC $V_{CC}$ or GND Current per                 |                          |
| Supply Pin ( $I_{CC}$ or GND)                  | $\pm 100$ mA             |
| Storage Temperature Range ( $T_{STG}$ )        | –65°C to +150°C          |

**Recommended Operating Conditions** (Note 6)

|                                                 |                |
|-------------------------------------------------|----------------|
| Power Supply                                    |                |
| Operating                                       | 1.65V to 3.6V  |
| Data Retention Only                             | 1.2V to 3.6V   |
| Input Voltage                                   | –0.3V to +3.6V |
| Output Voltage ( $V_O$ )                        |                |
| Output in Active States                         | 0V to $V_{CC}$ |
| Output in 3-State                               | 0.0V to 3.6V   |
| Output Current in $I_{OH}/I_{OL}$               |                |
| $V_{CC} = 3.0V$ to 3.6V                         | $\pm 12$ mA    |
| $V_{CC} = 2.3V$ to 2.7V                         | $\pm 8$ mA     |
| $V_{CC} = 1.65V$ to 2.3V                        | $\pm 3$ mA     |
| Free Air Operating Temperature ( $T_A$ )        | –40°C to +85°C |
| Minimum Input Edge Rate ( $\Delta t/\Delta V$ ) |                |
| $V_{IN} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$        | 10 ns/V        |

**Note 4:** The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 5:**  $I_O$  Absolute Maximum Rating must be observed.

**Note 6:** Floating or unused inputs must be held HIGH or LOW.

**DC Electrical Characteristics (2.7V <  $V_{CC}$  ≤ 3.6V)**

| Symbol          | Parameter                      | Conditions                                           | $V_{CC}$<br>(V) | Min            | Max       | Units   |
|-----------------|--------------------------------|------------------------------------------------------|-----------------|----------------|-----------|---------|
| $V_{IH}$        | HIGH Level Input Voltage       |                                                      | 2.7–3.6         | 2.0            |           | V       |
| $V_{IL}$        | LOW Level Input Voltage        |                                                      | 2.7–3.6         |                | 0.8       | V       |
| $V_{OH}$        | HIGH Level Output Voltage      | $I_{OH} = -100 \mu A$                                | 2.7–3.6         | $V_{CC} - 0.2$ |           | V       |
|                 |                                | $I_{OH} = -6$ mA                                     | 2.7             | 2.2            |           | V       |
|                 |                                | $I_{OH} = -8$ mA                                     | 3.0             | 2.4            |           | V       |
|                 |                                | $I_{OH} = -12$ mA                                    | 3.0             | 2.2            |           | V       |
| $V_{OL}$        | LOW Level Output Voltage       | $I_{OL} = 100 \mu A$                                 | 2.7–3.6         |                | 0.2       | V       |
|                 |                                | $I_{OL} = 6$ mA                                      | 2.7             |                | 0.4       | V       |
|                 |                                | $I_{OL} = 8$ mA                                      | 3.0             |                | 0.55      | V       |
|                 |                                | $I_{OL} = 12$ mA                                     | 3.0             |                | 0.8       | V       |
| $I_I$           | Input Leakage Current          | $0 \leq V_I \leq 3.6V$                               | 2.7–3.6         |                | $\pm 5.0$ | $\mu A$ |
| $I_{OZ}$        | 3-STATE Output Leakage         | $0 \leq V_O \leq 3.6V$<br>$V_I = V_{IH}$ or $V_{IL}$ | 2.7–3.6         |                | $\pm 10$  | $\mu A$ |
| $I_{OFF}$       | Power-OFF Leakage Current      | $0 \leq (V_I, V_O) \leq 3.6V$                        | 0               |                | 10        | $\mu A$ |
| $I_{CC}$        | Quiescent Supply Current       | $V_I = V_{CC}$ or GND                                | 2.7–3.6         |                | 20        | $\mu A$ |
|                 |                                | $V_{CC} \leq (V_I, V_O) \leq 3.6V$ (Note 7)          | 2.7–3.6         |                | $\pm 20$  | $\mu A$ |
| $\Delta I_{CC}$ | Increase in $I_{CC}$ per Input | $V_{IH} = V_{CC} - 0.6V$                             | 2.7–3.6         |                | 750       | $\mu A$ |

**Note 7:** Outputs disabled or 3-STATE only.

**DC Electrical Characteristics ( $2.3V \leq V_{CC} \leq 2.7V$ )**

| Symbol    | Parameter                 | Conditions                                                  | $V_{CC}$<br>(V) | Min            | Max       | Units   |
|-----------|---------------------------|-------------------------------------------------------------|-----------------|----------------|-----------|---------|
| $V_{IH}$  | HIGH Level Input Voltage  |                                                             | 2.3–2.7         | 1.6            |           | V       |
| $V_{IL}$  | LOW Level Input Voltage   |                                                             | 2.3–2.7         |                | 0.7       | V       |
| $V_{OH}$  | HIGH Level Output Voltage | $I_{OH} = -100 \mu A$                                       | 2.3–2.7         | $V_{CC} - 0.2$ |           | V       |
|           |                           | $I_{OH} = -4 \text{ mA}$                                    | 2.3             | 2.0            |           | V       |
|           |                           | $I_{OH} = -6 \text{ mA}$                                    | 2.3             | 1.8            |           | V       |
|           |                           | $I_{OH} = -8 \text{ mA}$                                    | 2.3             | 1.7            |           | V       |
| $V_{OL}$  | LOW Level Output Voltage  | $I_{OL} = 100 \mu A$                                        | 2.3–2.7         |                | 0.2       | V       |
|           |                           | $I_{OL} = 6 \text{ mA}$                                     | 2.3             |                | 0.4       | V       |
|           |                           | $I_{OL} = 8 \text{ mA}$                                     | 2.3             |                | 0.6       | V       |
| $I_I$     | Input Leakage Current     | $0 \leq V_I \leq 3.6V$                                      | 2.3–2.7         |                | $\pm 5.0$ | $\mu A$ |
| $I_{OZ}$  | 3-STATE Output Leakage    | $0 \leq V_O \leq 3.6V$<br>$V_I = V_{IH} \text{ or } V_{IL}$ | 2.3–2.7         |                | $\pm 10$  | $\mu A$ |
| $I_{OFF}$ | Power-OFF Leakage Current | $0 \leq (V_I, V_O) \leq 3.6V$                               | 0               |                | 10        | $\mu A$ |
| $I_{CC}$  | Quiescent Supply Current  | $V_I = V_{CC} \text{ or GND}$                               | 2.3–2.7         |                | 20        | $\mu A$ |
|           |                           | $V_{CC} \leq (V_I, V_O) \leq 3.6V$ (Note 8)                 | 2.3–2.7         |                | $\pm 20$  | $\mu A$ |

**Note 8:** Outputs disabled or 3-STATE only.**DC Electrical Characteristics ( $1.65V \leq V_{CC} < 2.3V$ )**

| Symbol    | Parameter                 | Conditions                                                  | $V_{CC}$<br>(V) | Min                  | Max                  | Units   |
|-----------|---------------------------|-------------------------------------------------------------|-----------------|----------------------|----------------------|---------|
| $V_{IH}$  | HIGH Level Input Voltage  |                                                             | 1.65–2.3        | $0.65 \times V_{CC}$ |                      | V       |
| $V_{IL}$  | LOW Level Input Voltage   |                                                             | 1.65–2.3        |                      | $0.35 \times V_{CC}$ | V       |
| $V_{OH}$  | HIGH Level Output Voltage | $I_{OH} = -100 \mu A$                                       | 1.65–2.3        | $V_{CC} - 0.2$       |                      | V       |
|           |                           | $I_{OH} = -3 \text{ mA}$                                    | 1.65            | 1.25                 |                      | V       |
| $V_{OL}$  | LOW Level Output Voltage  | $I_{OL} = 100 \mu A$                                        | 1.65–2.3        |                      | 0.2                  | V       |
|           |                           | $I_{OL} = 3 \text{ mA}$                                     | 1.65            |                      | 0.3                  | V       |
| $I_I$     | Input Leakage Current     | $0 \leq V_I \leq 3.6V$                                      | 1.65–2.3        |                      | $\pm 5.0$            | $\mu A$ |
| $I_{OZ}$  | 3-STATE Output Leakage    | $0 \leq V_O \leq 3.6V$<br>$V_I = V_{IH} \text{ or } V_{IL}$ | 1.65–2.3        |                      | $\pm 10$             | $\mu A$ |
| $I_{OFF}$ | Power-OFF Leakage Current | $0 \leq (V_I, V_O) \leq 3.6V$                               | 0               |                      | 10                   | $\mu A$ |
| $I_{CC}$  | Quiescent Supply Current  | $V_I = V_{CC} \text{ or GND}$                               | 1.65–2.3        |                      | 20                   | $\mu A$ |
|           |                           | $V_{CC} \leq (V_I, V_O) \leq 3.6V$ (Note 9)                 | 1.65–2.3        |                      | $\pm 20$             | $\mu A$ |

**Note 9:** Outputs disabled or 3-STATE only.

## AC Electrical Characteristics (Note 10)

| Symbol                                 | Parameter                          | T <sub>A</sub> = −40°C to +85°C, C <sub>L</sub> = 30 pF, R <sub>L</sub> = 500Ω |     |                               |     |                                |      | Units |
|----------------------------------------|------------------------------------|--------------------------------------------------------------------------------|-----|-------------------------------|-----|--------------------------------|------|-------|
|                                        |                                    | V <sub>CC</sub> = 3.3V ± 0.3V                                                  |     | V <sub>CC</sub> = 2.5V ± 0.2V |     | V <sub>CC</sub> = 1.8V ± 0.15V |      |       |
|                                        |                                    | Min                                                                            | Max | Min                           | Max | Min                            | Max  |       |
| t <sub>PHL</sub> , t <sub>PLH</sub>    | Propagation Delay                  | 0.8                                                                            | 3.3 | 1.0                           | 3.8 | 1.5                            | 7.6  | ns    |
| t <sub>PZL</sub> , t <sub>PZH</sub>    | Output Enable Time                 | 0.8                                                                            | 3.8 | 1.0                           | 5.1 | 1.5                            | 9.8  | ns    |
| t <sub>PLZ</sub> , t <sub>PHZ</sub>    | Output Disable Time                | 0.8                                                                            | 3.6 | 1.0                           | 4.0 | 1.5                            | 7.2  | ns    |
| t <sub>OSHL</sub><br>t <sub>OSLH</sub> | Output to Output Skew<br>(Note 11) |                                                                                | 0.5 |                               | 0.5 |                                | 0.75 | ns    |

**Note 10:** For  $C_L = 50\text{pF}$ , add approximately 300 ps to the AC maximum specification.

**Note 11:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW ( $t_{OSHL}$ ) or LOW-to-HIGH ( $t_{OSLH}$ ).


## Dynamic Switching Characteristics

| Symbol    | Parameter                            | Conditions                                                | $V_{CC}$<br>(V)   | $T_A = +25^{\circ}\text{C}$ | Units |
|-----------|--------------------------------------|-----------------------------------------------------------|-------------------|-----------------------------|-------|
|           |                                      |                                                           |                   | Typical                     |       |
| $V_{OLP}$ | Quiet Output Dynamic Peak $V_{OL}$   | $C_L = 30\text{ pF}, V_{IH} = V_{CC}, V_{IL} = 0\text{V}$ | 1.8<br>2.5<br>3.3 | 0.15<br>0.25<br>0.35        | V     |
| $V_{OLV}$ | Quiet Output Dynamic Valley $V_{OL}$ | $C_L = 30\text{ pF}, V_{IH} = V_{CC}, V_{IL} = 0\text{V}$ | 1.8<br>2.5<br>3.3 | -0.15<br>-0.25<br>-0.35     | V     |
| $V_{OHV}$ | Quiet Output Dynamic Valley $V_{OH}$ | $C_L = 30\text{ pF}, V_{IH} = V_{CC}, V_{IL} = 0\text{V}$ | 1.8<br>2.5<br>3.3 | 1.55<br>2.05<br>2.65        | V     |

## Capacitance

| Symbol    | Parameter                     | Conditions                                                                                         | $T_A = +25^{\circ}\text{C}$ | Units |
|-----------|-------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------|-------|
|           |                               |                                                                                                    | Typical                     |       |
| $C_{IN}$  | Input Capacitance             | $V_{CC} = 1.8, 2.5\text{V or } 3.3\text{V}, V_I = 0\text{V or } V_{CC}$                            | 6                           | pF    |
| $C_{OUT}$ | Output Capacitance            | $V_I = 0\text{V or } V_{CC}, V_{CC} = 1.8\text{V}, 2.5\text{V or } 3.3\text{V}$                    | 7                           | pF    |
| $C_{PD}$  | Power Dissipation Capacitance | $V_I = 0\text{V or } V_{CC}, f = 10\text{ MHz}, V_{CC} = 1.8\text{V}, 2.5\text{V or } 3.3\text{V}$ | 20                          | pF    |

## AC Loading and Waveforms

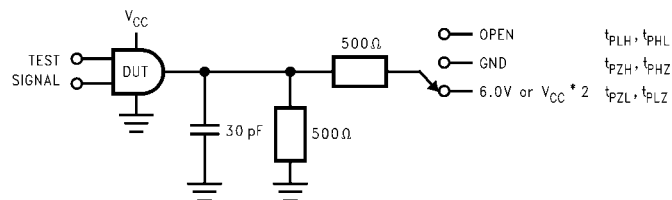

| TEST               | SWITCH                                                                                         |
|--------------------|------------------------------------------------------------------------------------------------|
| $t_{PLH}, t_{PHL}$ | Open                                                                                           |
| $t_{PZL}, t_{PLZ}$ | 6V at $V_{CC} = 3.3 \pm 0.3V$ ;<br>$V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V; 1.8 \pm 0.15V$ |
| $t_{PZH}, t_{PHZ}$ | GND                                                                                            |

FIGURE 1. AC Test Circuit

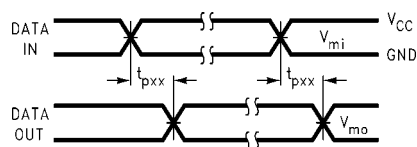


FIGURE 2. Waveform for Inverting and Non-Inverting Functions

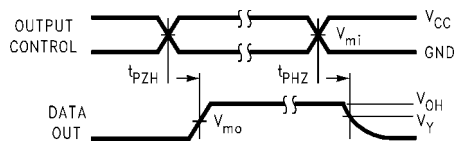


FIGURE 3. 3-STATE Output High Enable and Disable Times for Low Voltage Logic


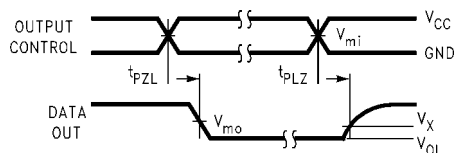


FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

| Symbol   | $V_{CC}$        |                  |                  |
|----------|-----------------|------------------|------------------|
|          | $3.3V \pm 0.3V$ | $2.5V \pm 0.2V$  | $1.8V \pm 0.15V$ |
| $V_{mi}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_{mo}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_X$    | $V_{OL} + 0.3V$ | $V_{OL} + 0.15V$ | $V_{OL} + 0.15V$ |
| $V_Y$    | $V_{OH} - 0.3V$ | $V_{OH} - 0.15V$ | $V_{OH} - 0.15V$ |

# Physical Dimensions inches (millimeters) unless otherwise noted

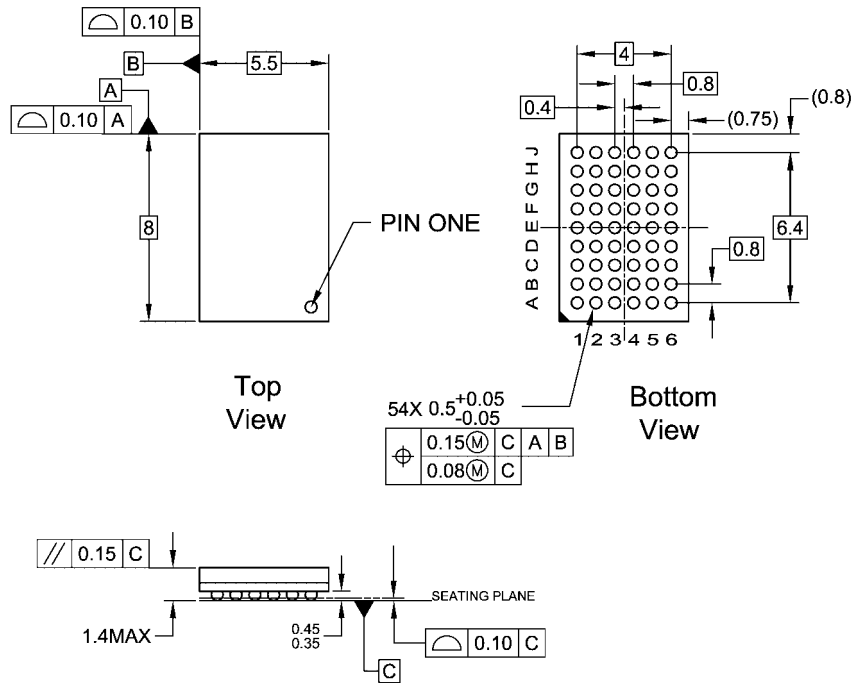


## NOTES:

- THIS PACKAGE CONFORMS TO JEDEC M0-205
- ALL DIMENSIONS IN MILLIMETERS
- LAND PATTERN RECOMMENDATION: NSMD (Non Solder Mask Defined)  
.35MM DIA PADS WITH A SOLDERMASK OPENING OF .45MM CONCENTRIC TO PADS
- DRAWING CONFORMS TO ASME Y14.5M-1994

BGA54ArevD

**54-Ball Fine-Pitch Ball Grid Array (FBGA), JEDEC MO-205, 5.5mm Wide  
Package Number BGA54A**

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

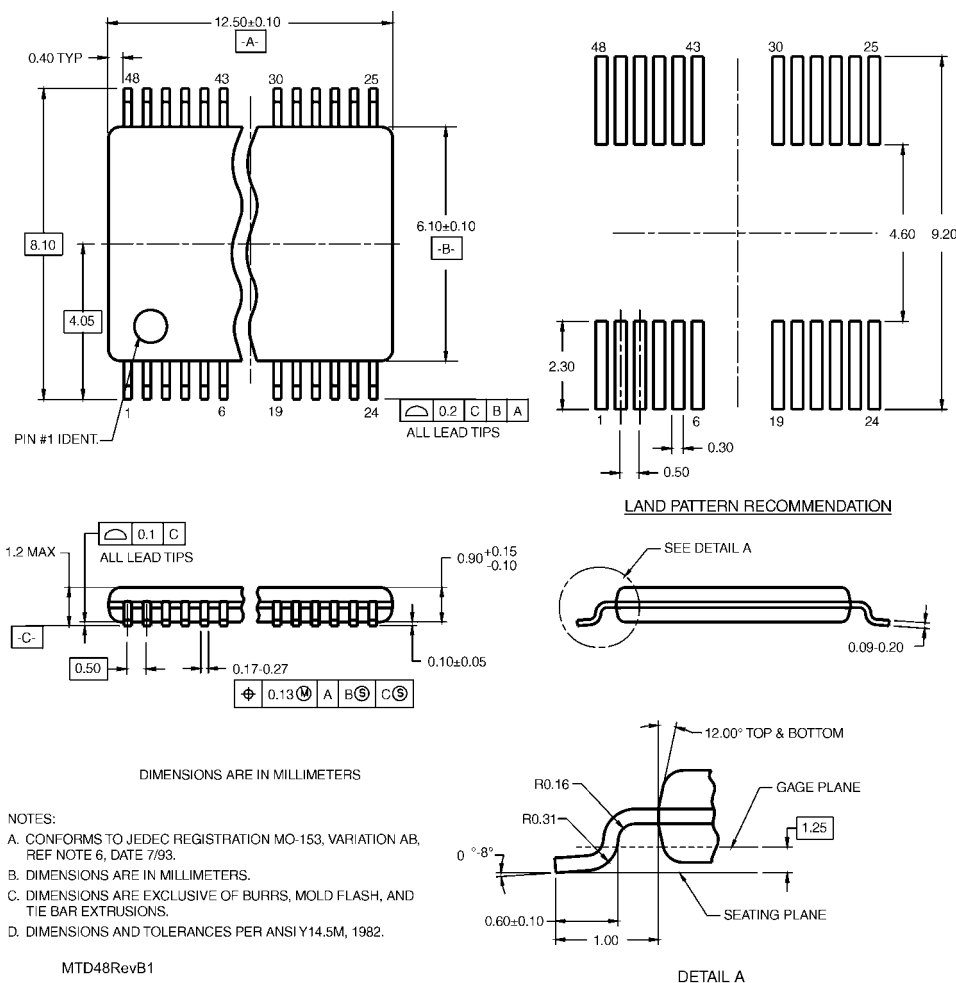

48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide  
Package Number MTD48

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)