

T-41-11

(Unit : mm)

-
- Pale blue resin
 (GL527/GL537)
 Blue resin
 (GL537/GL538)
- 5.0±0.15
 1.5MAX.
 0.8±0.2
 *
 23.5
 0.5
 2.5
 0.3MIN.
 0.8(GL528/GL538)
- ① Anode
 ② Cathode
- | | *portion dimension |
|-------------|--------------------|
| GL527/GL537 | 7.7±0.2 |
| GL528/GL538 | 8.4±0.2 |

94.

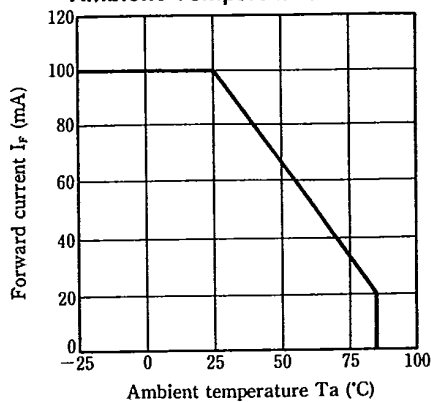
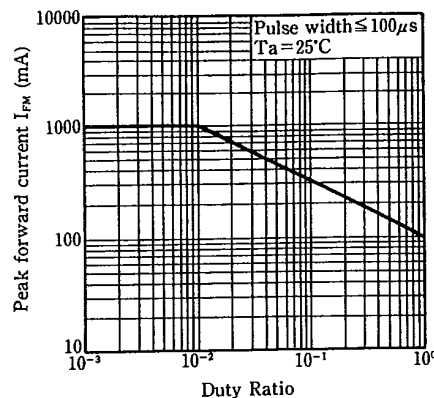
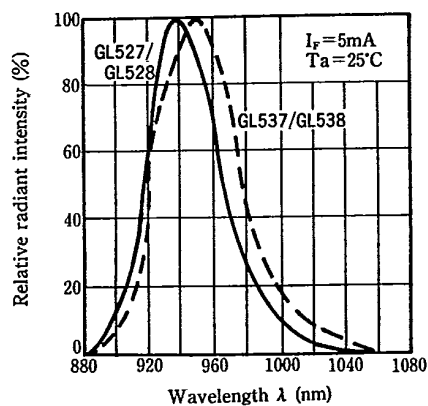
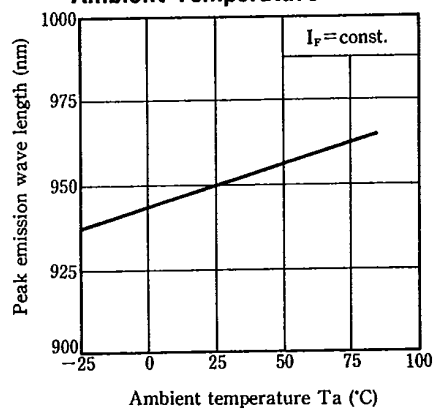
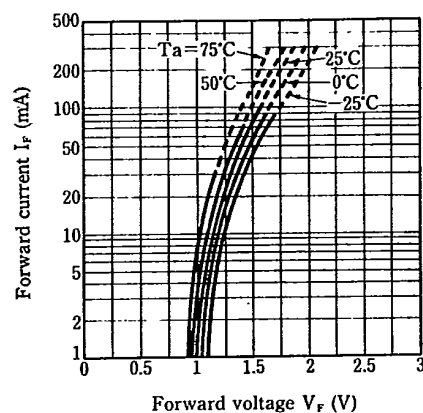
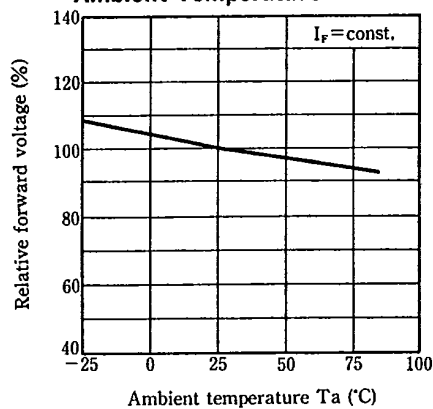
Fig. 1 Forward Current vs. Ambient Temperature**Fig. 2 Peak Forward Current vs. Duty Ratio****Fig. 3 Spectral Distribution (GL527/GL528)****Fig. 4 Peak Emission Wave length vs. Ambient Temperature****Fig. 5 Forward Current vs. Forward Voltage****Fig. 6 Relative Forward Voltage vs. Ambient Temperature**

Fig. 7 Relative Output vs. Ambient Temperature (Detector : PD410PI)

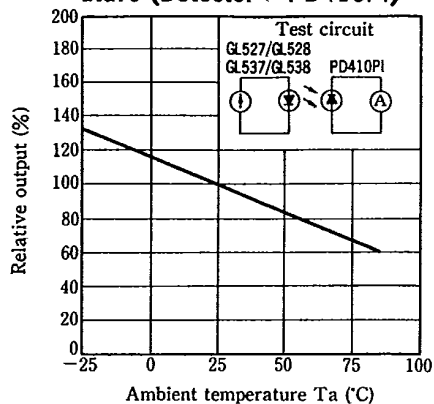


Fig. 8 Radiation Intensity vs. Peak Forward Current

T-41-11

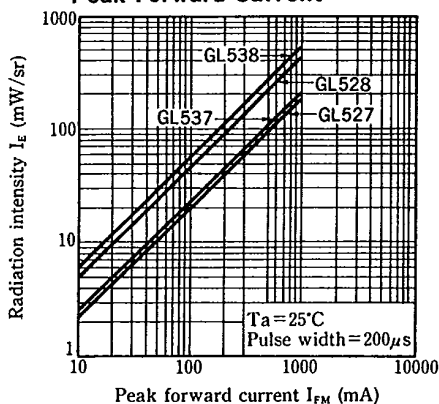


Fig. 9 Relative Collector Current vs. Distance (Detector : PD410PI) (GL527/GL537/GL528/GL538)

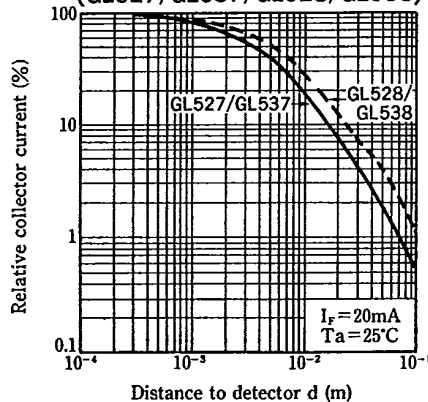


Fig. 10 Relative Collector Current vs. Distance (Detector : PD49PI) (GL527/GL537/GL528/GL538)

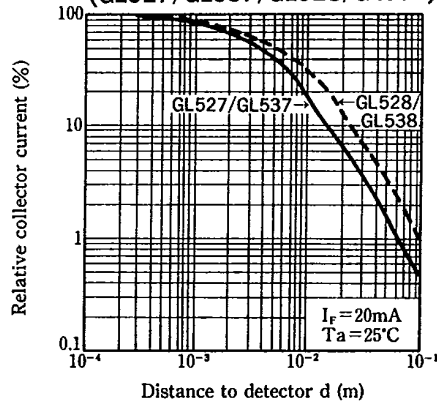


Fig. 11 Radiation Diagram (GL527/GL537) (Ta = 25°C)

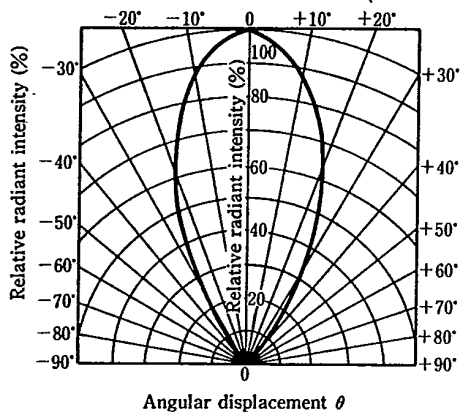


Fig. 12 Radiation Diagram (GL528/GL538) (Ta = 25°C)

