TERMINATIONS

Type N, 1 Watt, DC - 4 GHz, Mismatch - 400 N Series

Catalog No.	Z0 (Ohms)	VSWR
400-0.00	Short	Infinite
400-1.00	50.0	1.00 ± .05
400-1.25	40.0	1.25 ± .05
400-1.50	33.3	1.50 ± .06
400-1.75	28.6	1.75 ± .08
400-2.00	25.0	2.00 ± .12
400-9.99	Open	Infinite

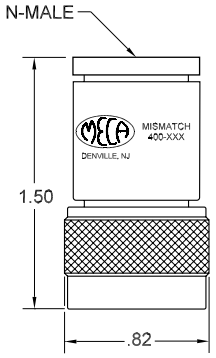

ELECTRICAL SPECIFICATIONS

Frequency: DC - 4 GHz
Power (Avg): 1 Watt
Power (Peak): 1 kWatts

MECHANICAL SPECIFICATIONS

Connector: Stainless Steel, Passivated
Pin: Brass, Gold Plated
Housing: Stainless Steel, Passivated
Insulator: Teflon, Virgin Elec. Grade
Weight: 63 Grams

Type N, 1 Watt, DC - 4 GHz, Precision - 409-1



ELECTRICAL SPECIFICATIONS

Frequency: DC - 4 GHz
VSWR (Max): 1.05:1
Impedance (Nom): 50 Ohms
Power (Avg): 1 Watt
Power (Peak): 1 kWatt

MECHANICAL SPECIFICATIONS

Connector: Stainless Steel, Passivated
Pin: Brass, Gold Plated
Housing: Stainless Steel, Passivated
Insulator: Teflon, Virgin Elec. Grade
Weight: 63 Grams