


International IOR Rectifier

SCHOTTKY RECTIFIER

21DQ04

2 Amp



Major Ratings and Characteristics



Characteristics	21DQ04	Units
$I_{F(AV)}$ Rectangular waveform	2	A
V_{RRM}	40	V
V_F @2Apk, $T_J = 125^\circ\text{C}$	0.5	V
T_J range	-40 to 150	$^\circ\text{C}$

Description/Features

The 21DQ04 axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

CASE STYLE AND DIMENSIONS

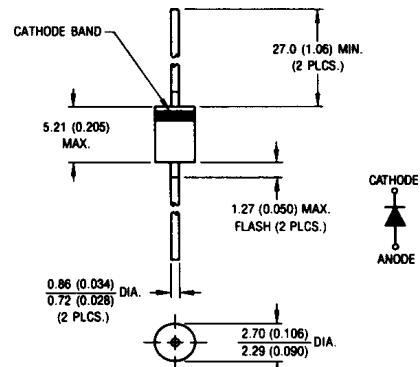

Conform to JEDEC Outline DO-204AL (DO-41)

Dimensions in millimeters and inches

Voltage Ratings

Part number	21DQ04
V_R Max. DC Reverse Voltage (V)	40
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	21DQ04	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 4	2	A	50% duty cycle @ $T_C = 112^\circ\text{C}$, rectangular waveform
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6	420	A	5 μs Sine or 3 μs Rect. pulse
	70		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	5.0	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1.5\text{ Amps}$, $L = 5\text{ mH}$
I_{AR} Repetitive Avalanche Current	0.7	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters		21DQ04		Units	Conditions	
		Typ.	Max.			
V _{FM} Max. Forward Voltage Drop (1)		0.49	0.55	V	@ 2A	T _J = 25 °C
		0.60	0.65	V	@ 4A	
		0.42	0.5	V	@ 2A	T _J = 125 °C
		0.56	0.62	V	@ 4A	
I _{RM} Max. Reverse Leakage Current (1)		0.01	0.50	mA	T _J = 25 °C	V _R = rated V _R
		5.2	10	mA	T _J = 125 °C	
C _T Typical Junction Capacitance		130		pF	V _R = 5V _{DC} ; (test signal range 100Khz to 1Mhz) 25°C	
L _S Typical Series Inductance		8.0		nH	Measured lead to lead 5mm from package body	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	21DQ04	Units	Conditions
T_J Max. Junction Temperature Range (*)	-40 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
R_{thJA} Max. Thermal Resistance Junction to Ambient	100	$^\circ\text{C/W}$	DC Operation Without cooling fin
R_{thJL} Typical Thermal Resistance Junction to Lead	25	$^\circ\text{C/W}$	DC Operation (* See Fig. 4)
wt Approximate Weight	0.33(0.012)	g(oz.)	
Case Style	DO-204AL(DO-41)		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

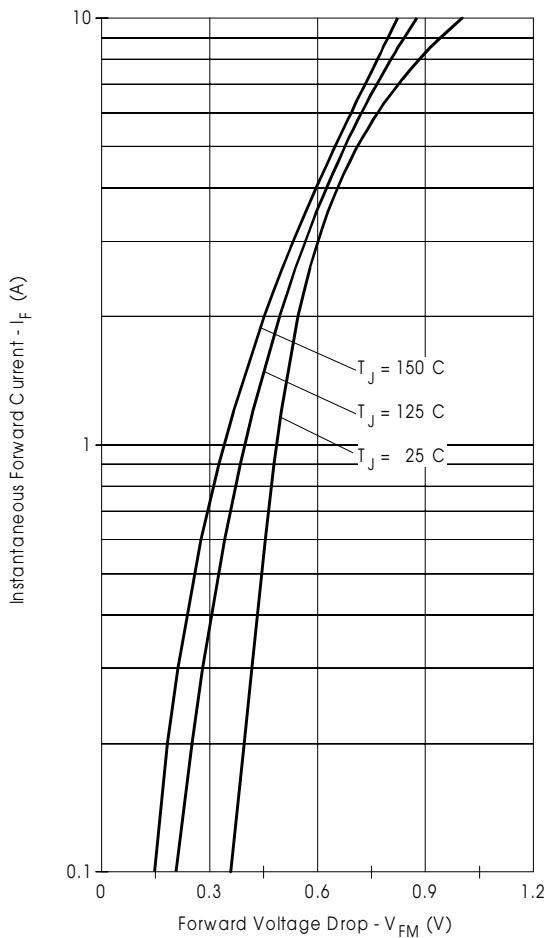


Fig. 1 - Maximum Forward Voltage Drop Characteristics

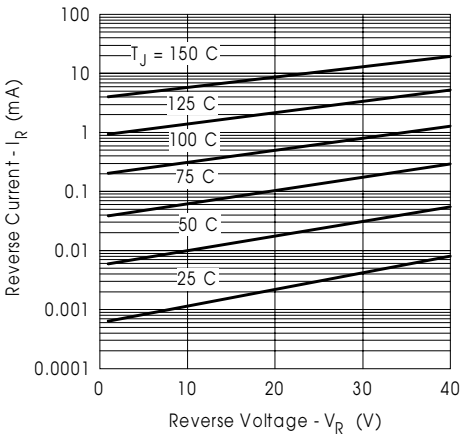


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

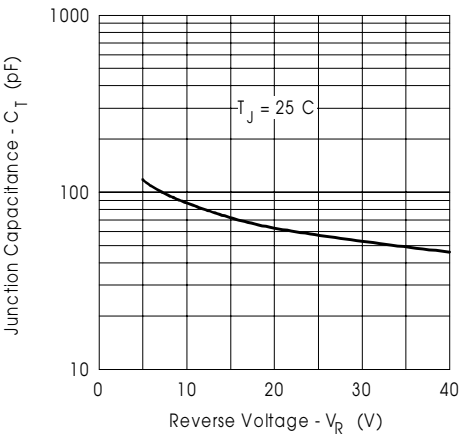


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

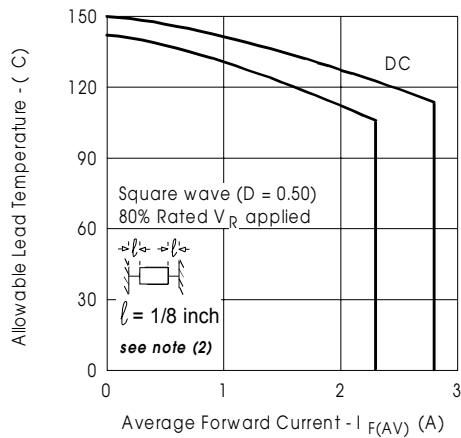


Fig. 4 - Maximum Allowable Lead Temperature Vs. Average Forward Current

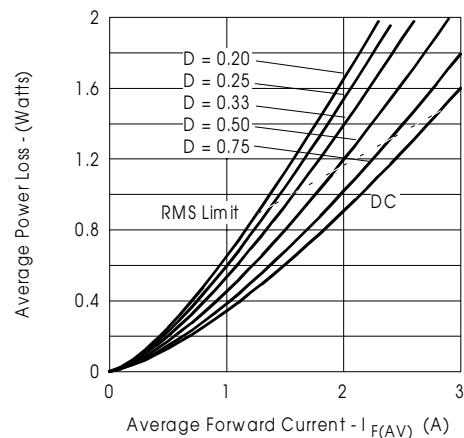


Fig. 5 - Forward Power Loss Characteristics

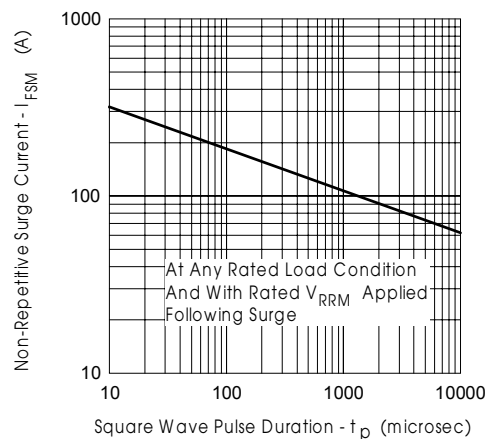


Fig. 6 - Maximum Non-Repetitive Surge Current

(2) Formula used: $T_L = T_J - (Pd + Pd_{REV}) \times R_{thJL}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 5);

Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Ordering Information Table

Device Code		21	D	Q	04	TR
		1	2	3	4	5
1	-	21 = 2.1A (Axial and small packages - Current is x10)				
2	-	D = DO-41 package				
3	-	Q = Schottky Q.. Series				
4	-	04 = Voltage Rating : 40V				
5	-	TR = Tape & Reel package (5000 pcs)				
		TB = Tape & Box package (Ammunition -3000 pcs)				
	-	= Box package (1000 pcs)				

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/02