



Backlight

MODEL NO: BLB-5428I-YG

Device Number: DEA-830-001 REV: 1.3

ECN: _____ Page: 1/5

■ **Features:**

- High Performance
- Free Design
- Longer Life and Low Power Consumption
- Various Color : Blue, Green, Yellow Green (Standard), Orange, Amber, Red

■ **Descriptions:**

LED back light provides uniform , high output backlighting with low power than CCFL and EL's. There are two back light method are available :

- (1) Bottom Backlight
- (2) Edge Backlight

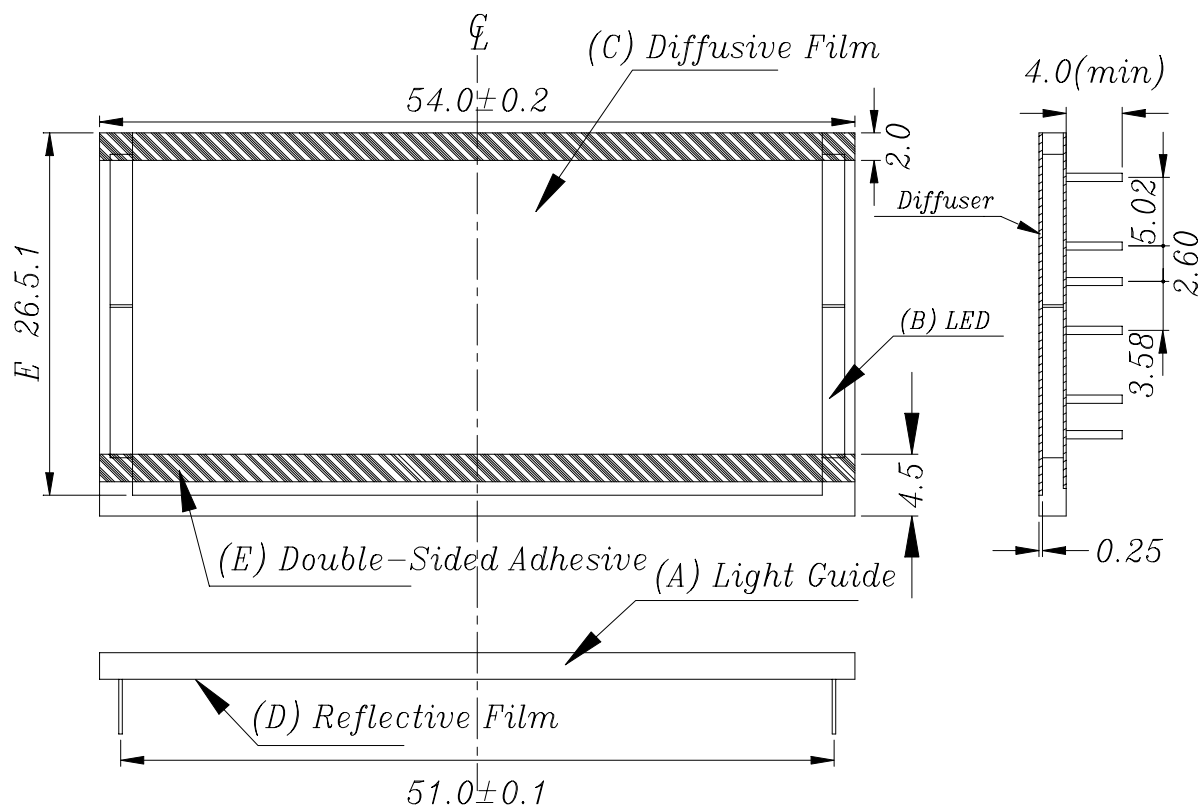
■ **Applications:**

- LCD Backlight:
 - Medical Instruments
 - Cellular Phone
 - Viedo, Audio Equipment
 - PDA
- Office Automation Equipment
- Measuring Device Illumination

Backlight
MODEL NO: BLB-5428I-YG

Device Number: DEA-830-001 REV: 1.3

ECN: _____ Page: 2/5

Package Dimensions:


NO	PART	MATERIAL
A	Light Guide	Acrylic
B	LED	97-22VGC/S56
C	Diffusive Film	PE
D	Reflective Film	PE
E	Double-Sided Adhesive	PE

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.2 mm unless otherwise noted.

Absolute Maximum Ratings(Ta=25℃)

Parameter	Symbol	Rating	Unit
Forward Current	^{*2} I _F	25	mA
Reverse Voltage	^{*2} V _R	5	V
Power Dissipation	P _D	0.06	W
Operating Temperature	T _{opr}	-20 to + 60	℃
Storage Temperature	T _{stg}	-30 to + 70	℃
Soldering Temperature * ¹	^{*1} T _{sol}	260	℃

*1: Soldering time ≤ 5seconds.

*2: One Circuit Operated

Electro-Optical Characteristics (Ta=25℃)

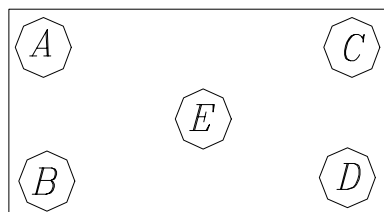
Emitting Color : Yellow Green

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Forward Voltage	V _F	I _F =20mA	--	2.10	2.40	V	
Reverse Current	I _R	V _R =5V	--	--	10	μ A	
Luminous Intensity	I _V	I _F =20mA	25	--	--	cd/m ²	* 1,2
Emission Wavelength	λ _D	I _F =20mA	570	--	576	nm	* 2
Spectral Line Half Width	Δ λ	I _F =20mA	--	30	--	nm	
Illuminance Power Deviation	Δ EH	I _F =20mA	--	--	25	%	* 3

1. The test position of luminous intensity is shown in Fig1.

2. The test equipment is Photo Research PR650.

3. The definition of luminous intensity deviation.



$$\Delta EH\% = \frac{B(MAX) - B(MIN)}{B(MAX)} * 100\%$$

Photo Detector

 BACK LIGHT

Measuring Method: (Ta=25℃, 65%RH)

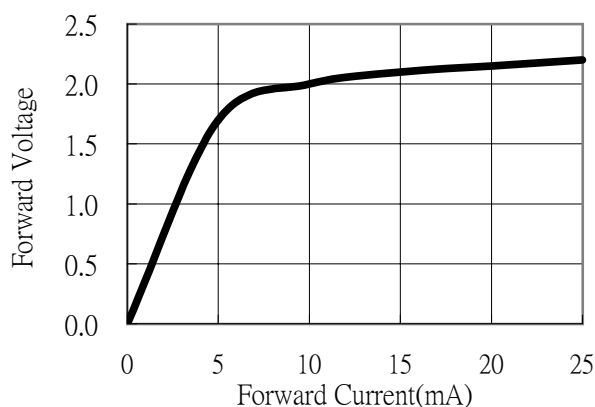
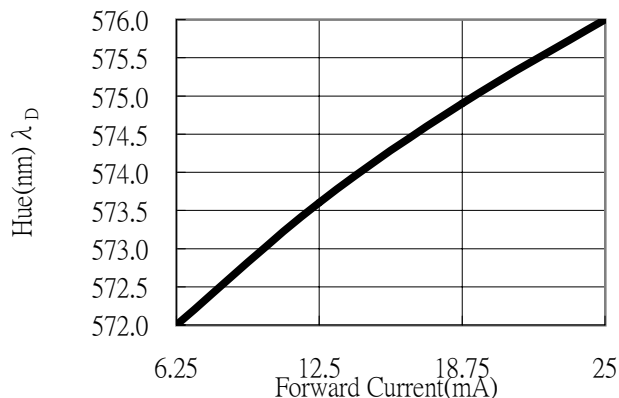
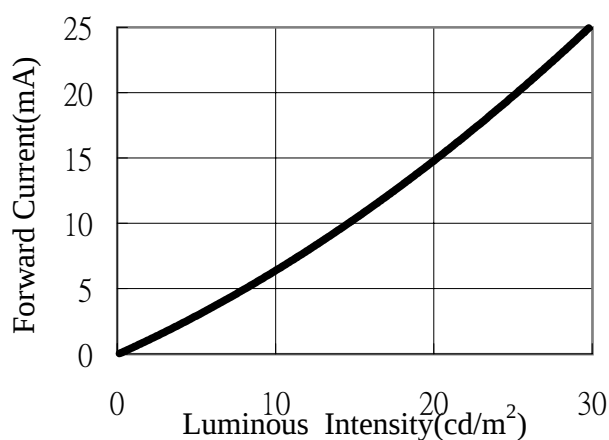
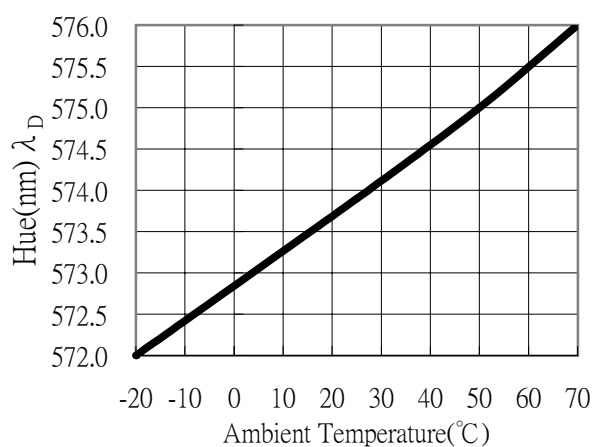
Figure 1 : Point for testing deviation → A, B, C, D, E (Measured by our equipment)

Backlight
MODEL NO: BLB-5428I-YG

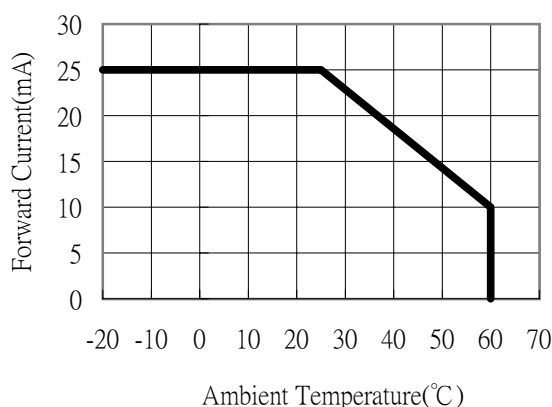
Device Number: DEA-830-001 REV: 1.3

ECN: _____ Page: 4/5

■ Typical Electro-Optical Characteristics Curves:

● Forward Voltage vs. Forward Current ($T_a=25^{\circ}\text{C}$)

● Emission Wavelength vs. Forward Current ($T_a=25^{\circ}\text{C}$)

● Forward Current vs. Luminous Intensity ($T_a=25^{\circ}\text{C}$)

● Wavelength vs. Ambient Temperature ($I_f=20\text{mA}$)


● Forward Current vs. Ambient Temperature



Backlight
MODEL NO:BLB-5428I-YG

Device Number: DEA-830-001 REV: 1.3

ECN: _____ Page: 5/5

Specification for Bin Grading:

Rank	Emission Wavelength λ_D (nm)
A	570~572
B	572~574
C	574~576
* Tolerance	± 1.0

Reliability Test:

Items	Conditions	Jusification Criteria	Quantity
High Temperature/ High Humidity Test	70°C, 85%RH, 1000hr	A,B,C	4dies*20PCS =80dies
High Temperature Storage	70°C, 1000hr	A,B,C	4dies*20PCS =80dies
Low Temperature Storage	-30°C, 1000hr	A,B,C	4dies*20PCS =80dies
Room Temperature DC Operating Life	25°C, 60 $\pm$ 10%RH, 1000hr/20mA(one chip)	A,B,C	4dies*20PCS =80dies

* Justification criteria:

A: Not one of LED is failed.

B: Not allowed to have warpage, scraping, discoloration, distortion, separation.

C: The variation of brightness must not to be over 30% of initial value luminous intensity.

Circuit Diagram:
