
CB120 Series CB200 Series




400-1200 Volts 120 Amps

400-1200 Volts 200 Amps



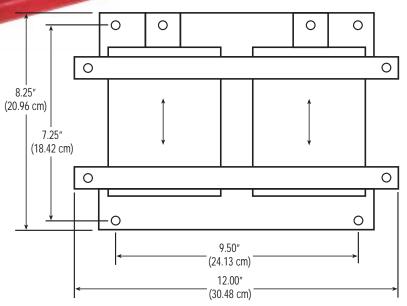



*All bridges are MOV compensated

	Repetitive Peak Reverse Voltage	Average Forward Current Max	Maximum Forward Voltage Drop	Maximum Reverse Current	Maximum Surge Current
CKE Number	V _{RRM} Per Leg V (Volts)	I _{FAVM} @ 50° A (Amps)	Vr @ Ir Per Leg V (Volts)	Ir @ V _{RRM} @ 25°C milliAmps	Ifsm (8.3ms) A (Amps)
CB120K2AA40	400	120	1.50	1.0	1200
CB120K2AA60	600	120	1.50	1.0	1200
CB120K2AA80	800	120	1.50	1.0	1200
CB120K2AA100	1000	120	1.50	1.0	1200
CB120K2AA120	1200	120	1.50	1.0	1200
CB200K2AA40	400	200	1.50	1.0	3000
CB200K2AA60	600	200	1.50	1.0	3000
CB200K2AA80	800	200	1.50	1.0	3000
CB200K2AA100	1000	200	1.50	1.0	3000
CB200K2AA120	1200	200	1.50	1.0	3000



CKE - 1000 Lucerne Road ■ Lucernemines, PA 15754 ■ Telephone: (724) 479-3533 ■ Fax: (724) 479-3537 E-mail: info@cke.com ■ Website: www.cke.com

CKE specializes in the design, development and manufacture of Silicon, Selenium, SCR, Thyristor and MOV custom assemblies and applications.

Our experienced engineers and our advanced technology provide the most economical and highest quality available.