















G30 DecorLED™, 25mm Edison Screw Based Lamps


Packages	Replaces Incandescent	Part Number	Input Voltage	Power Watts (typ)	Intensity per LED I_v mcd (typ)	λ_p (nm)	View Angle $2\theta_{1/2}$	Special Features
660nm Ultra Red GaAlAs/ GaAlAs		DEC-G30-0UR-014V	12/14V	1.0 to 1.7	760	660	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0UR-024V	24V					
		DEC-G30-0UR-120A	120VAC					
		DEC-G30-0UR-240A	240VAC					
633nm Super Red InGaAlP		DEC-G30-0ER-014V	12/14V	1.0 to 1.7	1750	630	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0ER-024V	24V					
		DEC-G30-0ER-120A	120VAC					
		DEC-G30-0ER-240A	240VAC					
612nm Super Orange InGaAlP		DEC-G30-0UO-014V	12/14V	1.0 to 1.7	1400	612	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0UO-024V	24V					
		DEC-G30-0UO-120A	120VAC					
		DEC-G30-0UO-240A	240VAC					
595nm Super Yellow InGaAlP		DEC-G30-0UY-014V	12/14V	1.0 to 1.7	1280	595	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0UY-024V	24V					
		DEC-G30-0UY-120A	120VAC					
		DEC-G30-0UY-240A	240VAC					
4500K Incand White SiC/GaN		DEC-G30-0IW-014V	12/14V	1.0 to 1.7	2000	4500K	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0IW-024V	24V					
		DEC-G30-0IW-120A	120VAC					
		DEC-G30-0IW-240A	240VAC					
8000K Cool White SiC/GaN		DEC-G30-0CW-014V	12/14V	1.0 to 1.7	1100	8000K	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0CW-024V	24V					
		DEC-G30-0CW-120A	120VAC					
		DEC-G30-0CW-240A	240VAC					
570nm Lime Green InGaAlP		DEC-G30-0UG-014V	12/14V	1.0 to 1.7	400	570	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0UG-024V	24V					
		DEC-G30-0UG-120A	120VAC					
		DEC-G30-0UG-240A	240VAC					
525nm Aqua Green SiC/GaN		DEC-G30-0AG-014V	12/14V	1.0 to 1.7	4400	525	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0AG-024V	24V					
		DEC-G30-0AG-120A	120VAC					
		DEC-G30-0AG-240A	240VAC					
505nm Blue Green SiC/GaN		DEC-G30-0BG-014V	12/14V	1.0 to 1.7	2000	505	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0BG-024V	24V					
		DEC-G30-0BG-120A	120VAC					
		DEC-G30-0BG-240A	240VAC					
470nm Super Blue SiC/GaN		DEC-G30-0PB-014V	12/14V	1.0 to 1.7	1300	470	270°	Contact Polarity V = DC only A = AC only
		DEC-G30-0PB-024V	24V					
		DEC-G30-0PB-120A	120VAC					
		DEC-G30-0PB-240A	240VAC					

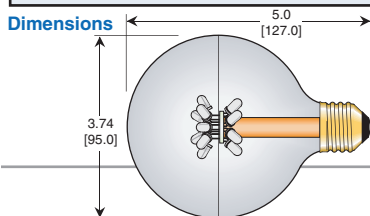


Options



DEC-G30T
Tinted



DEC-G30F
Frosted White



DEC-G30C
Frosted Colored