


Dual Digit Displays

Shape	Part Number	Emitting Color	Emitting Material	Wave Length (nm)	Luminous Intensity IF=10mA (ucd) Min. Max.	Common	Figure No.
0.56"(14.22mm)	DHR14A2 / DHR14C2	Red	GaP	700	900 - 2200	Anode / Cathode	3
	DUR14A2 / DUR14C2	Red	GaAsP/GaP	625	2200 - 5600	Anode / Cathode	
	DMR14A2 / DMR14C2	Red	GaAlAs	660	5600 - 21000	Anode / Cathode	
	DUG14A2 / DUG14C2	Green	GaP	565	2200 - 5600	Anode / Cathode	
	DUY14A2 / DUY14C2	Yellow	GaAsP/GaP	590	2200 - 5600	Anode / Cathode	
0.8"(20.32mm)	DHR20A2 / DHR20C2	Red	GaP	700	360 - 1400	Anode / Cathode	4
	DUR20A2 / DUR20C2	Red	GaAsP/GaP	625	2200 - 9000	Anode / Cathode	
	DMR20A2 / DMR20C2	Red	GaAlAs	660	9000 - 21000	Anode / Cathode	
	DUG20A2 / DUG20C2	Green	GaP	565	1400 - 3600	Anode / Cathode	
	DUY20A2 / DUY20C2	Yellow	GaAsP/GaP	590	1400 - 3600	Anode / Cathode	

3

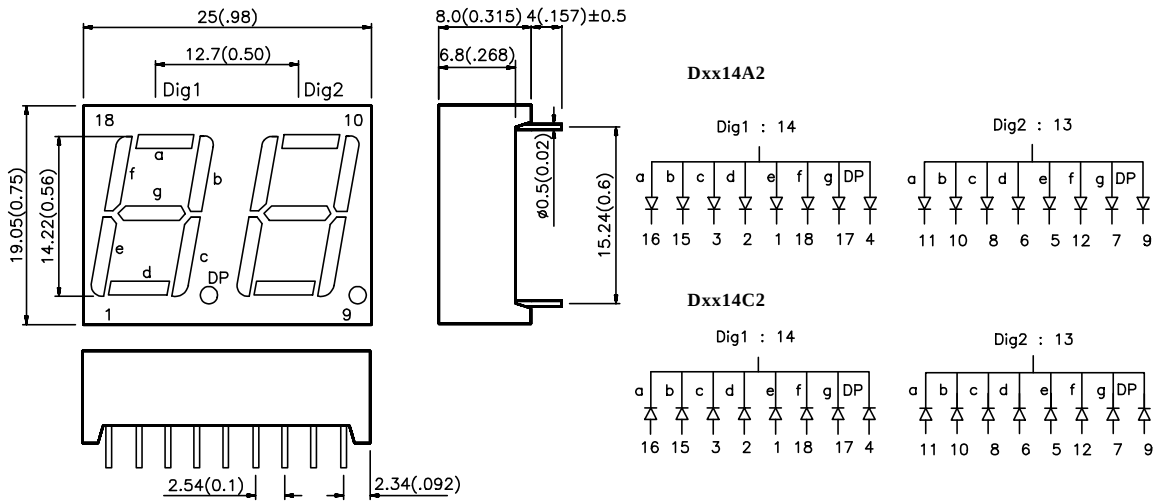

4

