


SMD 8 Pin Single Output TTL Compatible Active Delay Lines

TIME DELAY (ns) ±5% or ±2 nS†	PART NUMBER	TIME DELAY (ns) ±5% or ±2 nS†	PART NUMBER
5	EPA426-5	50	EPA426-50
10	EPA426-10	60	EPA426-60
12	EPA426-12	75	EPA426-75
15	EPA426-15	100	EPA426-100
20	EPA426-20	125	EPA426-125
25	EPA426-25	150	EPA426-150
30	EPA426-30	175	EPA426-175
35	EPA426-35	200	EPA426-200
40	EPA426-40	225	EPA426-225
45	EPA426-45	250	EPA426-250

†Which ever is greater. Delay Times referenced from input to leading edges at 25°C, 5.0V, with no load.

DC Electrical Characteristics					
Parameter	Test Conditions	Min	Max	Unit	
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max	0.5		V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}	-1.2		V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V	50		µA
		V _{CC} = max. V _{IN} = 5.25V	1.0		mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V	-2		mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0.	-100		mA
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN	75		mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0	75		mA
T _{RO}	Output Rise Time	T _d ≤ 500 nS (0.75 to 2.4 Volts)	4		nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V	20 TTL LOAD		
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V	10 TTL LOAD		

Schematic

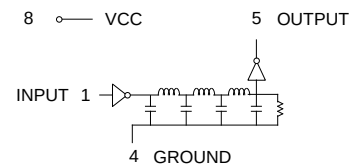

Recommended Operating Conditions		Min	Max	Unit	
V _{CC}	Supply Voltage	4.75	5.25		V
V _{IH}	High-Level Input Voltage	2.0			V
V _{IL}	Low-Level Input Voltage		0.8		V
I _{IK}	Input Clamp Current		-18		mA
I _{OH}	High-Level Output Current		-1.0		mA
I _{OL}	Low-Level Output Current		20		mA
PW*	Pulse Width of Total Delay	40			%
d*	Duty Cycle		40		%
T _A	Operating Free-Air Temperature	0	+70		°C

*These two values are inter-dependent.

Input Pulse Test Conditions @ 25° C			Unit
E _{IN}	Pulse Input Voltage	3.2	Volts
PW	Pulse Width % of Total Delay	110	%
T _{RI}	Pulse Rise Time (0.75 - 2.4 Volts)	2.0	nS
P _{RR}	Pulse Repetition Rate @ T _d ≤ 200 nS	1.0	MHz
	Pulse Repetition Rate @ T _d > 200 nS	100	KHz
V _{CC}	Supply Voltage	5.0	Volts

Package Dimensions

