


Features

- Glass Passivated Die Construction
- Super-Fast Recovery Time For High Efficiency
- Low Forward Voltage Drop and High Current Capability
- Surge Overload Rating to 50A Peak
- Ideally Suited for Automated Assembly

Mechanical Data

- Case: Molded Plastic
- Plastic Material: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band or Cathode Notch
- Weight: 0.093 grams (approx.)
- Marking: Type Number & Date Code: See Below

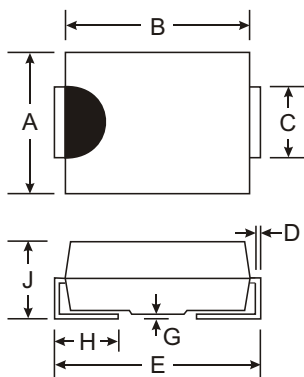

SMB		
Dim	Min	Max
A	3.30	3.94
B	4.06	4.57
C	1.96	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


Characteristic	Symbol	ES2G	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	400	V
RMS Reverse Voltage	V _{R(RMS)}	280	V
Average Rectified Output Current @ T _T = 110°C	I _O	2.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50	A
Forward Voltage @ I _F = 2.0A	V _{FM}	1.25	V
Peak Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 125°C	I _{RM}	5.0 350	μA
Reverse Recovery Time (Note 3)	t _{rr}	35	ns
Typical Capacitance (Note 2)	C _T	25	pF
Typical Thermal Resistance, Junction to Terminal (Note 1)	R _{θJT}	20	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-55 to +150	°C

Ordering Information (Note 4)


Device	Packaging	Shipping
ES2G-13	SMB	5000/Tape & Reel

- Notes:
1. Unit mounted on PC board with 5.0 mm² (0.013 mm thick) copper pads as heat sink.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Measured with I_F = 0.5A, I_R = 1.0A, t_{rr} = 0.25A. See Figure 5.
 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.


Marking Information




ES2G = Product type marking code
 311 = Manufacturers' code marking
 YWW = Date code marking
 Y = Last digit of year ex: 2 for 2002
 WW = Week code 01 to 52

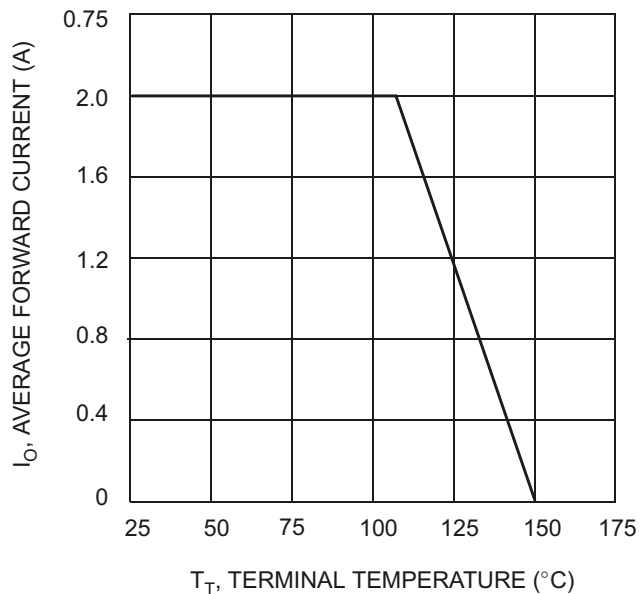


T_T , TERMINAL TEMPERATURE (°C)
Fig. 1 Forward Current Derating Curve

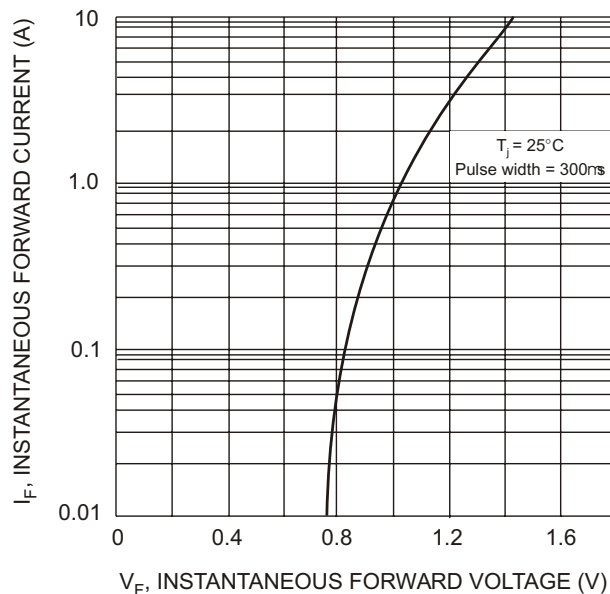


V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

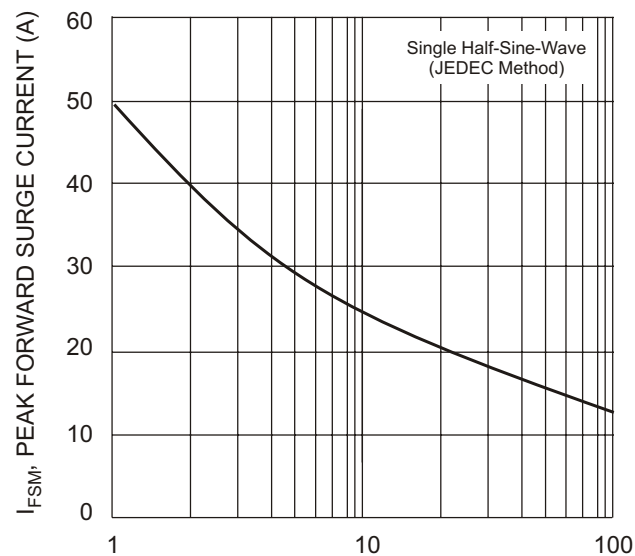


NUMBER OF CYCLES AT 60Hz
Fig. 3 Surge Current Derating Curve

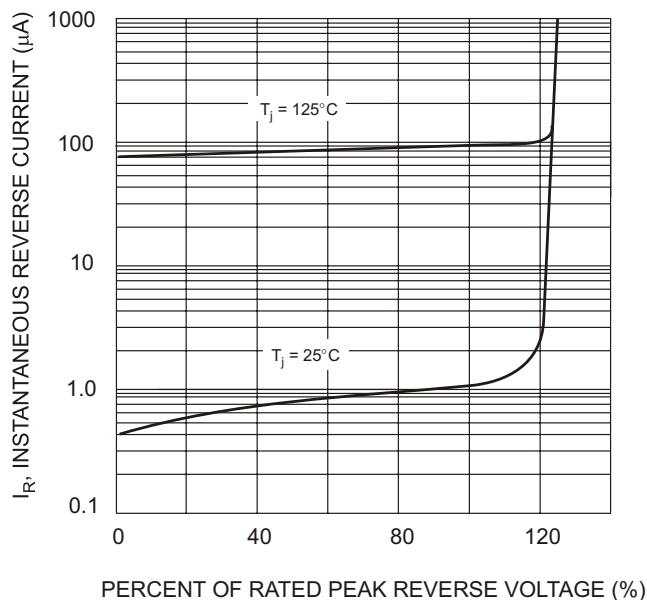

PERCENT OF RATED PEAK REVERSE VOLTAGE (%)
Fig. 4 Typical Reverse Characteristics

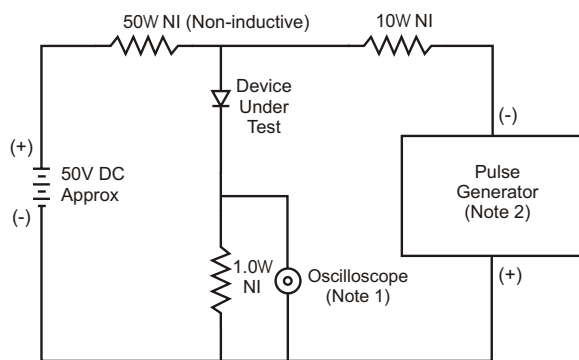

- Notes:
1. Rise Time = 7.0ns max. Input Impedance = 1.0MW, 22pF.
2. Rise Time = 10ns max. Input Impedance = 50W.

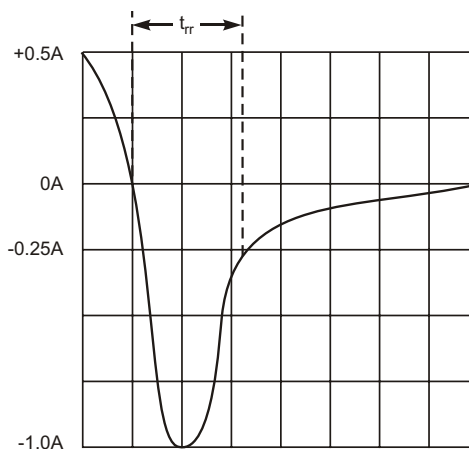

Set time base for 50/100 ns/cm

Fig. 5 Reverse Recovery Time Characteristic and Test Circuit