


HDM20416L-T

Dimensional Drawing

20 Character x 4 Lines, LED Backlight Small Size

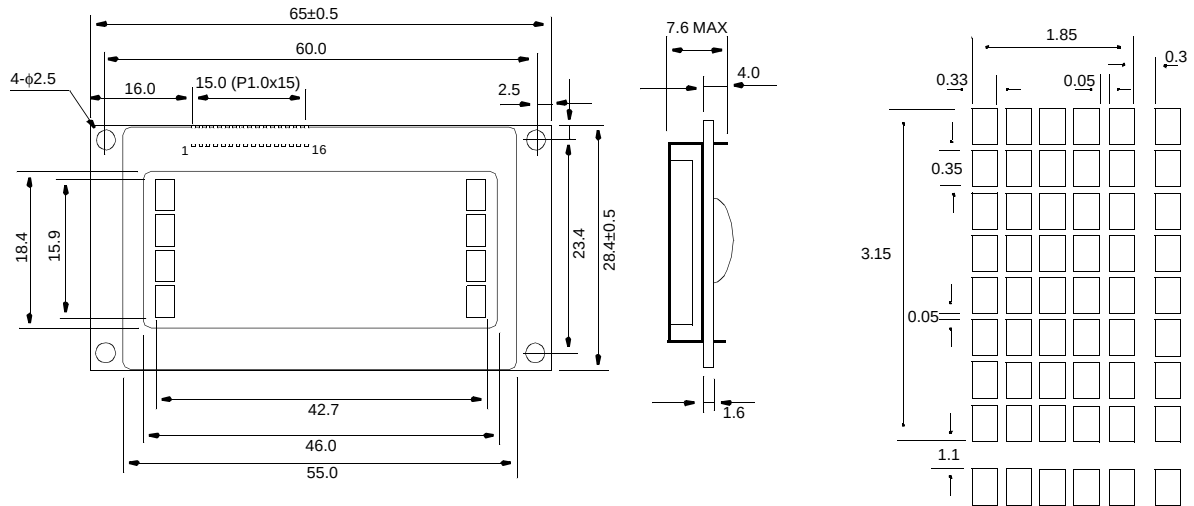

Dimension tolerance: +/-0.3mm

Features

Character Format 5x7 Dots with Cursor
Backlight.....LED
Options.....Gray STN/Yellow STN, 12 o'Clock/6 o'Clock View
Normal/Extended Temperature
Normal/Negative Displays

Physical Data

Module Size65.0W x 28.4H x 7.6T mm
Viewing Area Size.....46.0W x 18.4H mm
Weight.....28g


Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	$V_{DD}-V_{SS}$	0	7.0	V
SUPPLY VOLTAGE FOR LCD	$V_{DD}-V_L$	0	13.0	V
INPUT VOLTAGE	V_{IN}	$V_{SS}-0.3$	$V_{DD}+0.3$	V
OPERATING TEMPERATURE	T_{OP}	0	50	°C
STORAGE TEMPERATURE	T_{STG}	-20	70	°C
LED FORWARD CURRENT	I_F	-	200	mA
LED REVERSE VOLTAGE	V_R	-	8	V
LED POWER CONSUMPTION	P_D	-	800	mW

Electrical Characteristics (VDD=5.0±0.5V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT HIGH VOLTAGE	V_{IH}	-	$0.7V_{DD}$	-	-	V
INPUT LOW VOLTAGE	V_{IL}	-	-	-	0.6	V
OUTPUT HIGH VOLTAGE	V_{OH}	$I_{OH}=0.2mA$	$0.75V_{DD}$	-	-	V
OUTPUT LOW VOLTAGE	V_{OL}	$I_{OL}=1.2mA$	-	-	$0.2V_{DD}$	V
POWER SUPPLY CURRENT	I_{DD}	$V_{DD}=5.0V$	2	-	-	mA
POWER SUPPLY FOR LCD	$V_{DD}-V_L$	$T_A=25^{\circ}C$	-	-	-	V
LED FORWARD VOLTAGE	V_F	$I_F=110mA$	3.9	4.1	4.3	V
BRIGHTNESS	L	$I_F=110mA$	30	45	-	NIT
DRIVE METHOD	1/16 Duty					

Block Diagram

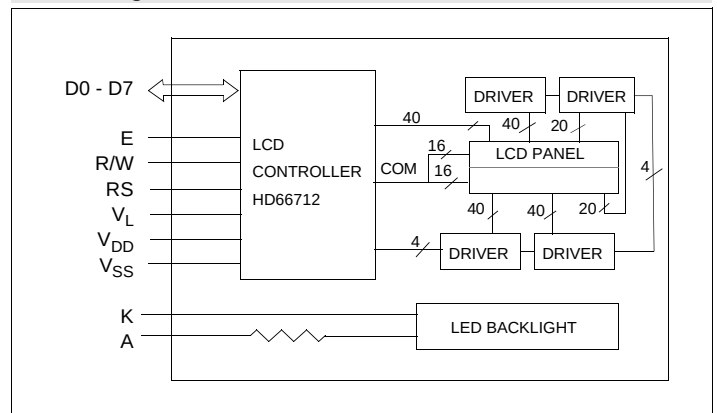


Pin Connections

PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V _{SS}	-	0V	Power supply
2	V _{DD}	-	5V	
3	V _L	-	-	
4	RS	H/L	H: Data input L: Instruction data input	
5	R/W	H/L	H: Data read L: Data write	
6	E	H,H→L	Enable signal	
7	D0	H/L	Data bus	
8	D1	H/L		
9	D2	H/L		
10	D3	H/L		
11	D4	H/L		
12	D5	H/L		
13	D6	H/L		
14	D7	H/L		
15	A	-	Anode for LED backlight	
16	K	-	Cathode for LED backlight	

HDM20416L-T

Dimensional Drawing

20 Character x 4 Lines, LED Backlight Small Size

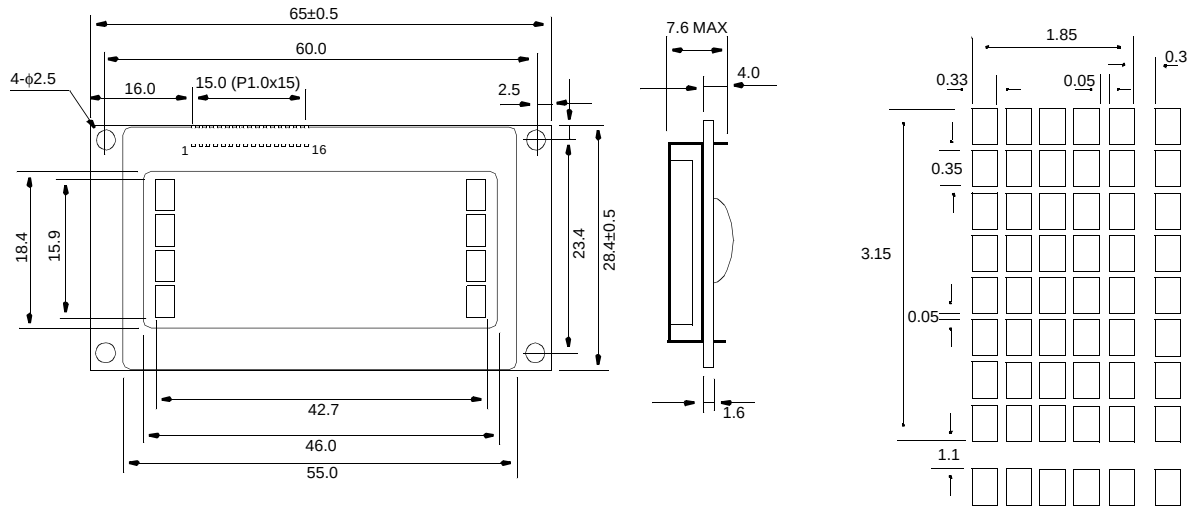

Dimension tolerance: +/-0.3mm

Features

Character Format 5x7 Dots with Cursor
Backlight.....LED
Options.....Gray STN/Yellow STN, 12 o'Clock/6 o'Clock View
Normal/Extended Temperature
Normal/Negative Displays

Physical Data

Module Size65.0W x 28.4H x 7.6T mm
Viewing Area Size.....46.0W x 18.4H mm
Weight.....28g


Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	$V_{DD}-V_{SS}$	0	7.0	V
SUPPLY VOLTAGE FOR LCD	$V_{DD}-V_L$	0	13.0	V
INPUT VOLTAGE	V_{IN}	$V_{SS}-0.3$	$V_{DD}+0.3$	V
OPERATING TEMPERATURE	T_{OP}	0	50	°C
STORAGE TEMPERATURE	T_{STG}	-20	70	°C
LED FORWARD CURRENT	I_F	-	200	mA
LED REVERSE VOLTAGE	V_R	-	8	V
LED POWER CONSUMPTION	P_D	-	800	mW

Electrical Characteristics (VDD=5.0±0.5V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT HIGH VOLTAGE	V_{IH}	-	$0.7V_{DD}$	-	-	V
INPUT LOW VOLTAGE	V_{IL}	-	-	-	0.6	V
OUTPUT HIGH VOLTAGE	V_{OH}	$I_{OH}=0.2mA$	$0.75V_{DD}$	-	-	V
OUTPUT LOW VOLTAGE	V_{OL}	$I_{OL}=1.2mA$	-	-	$0.2V_{DD}$	V
POWER SUPPLY CURRENT	I_{DD}	$V_{DD}=5.0V$	2	-	-	mA
POWER SUPPLY FOR LCD	$V_{DD}-V_L$	$T_A=25^{\circ}C$	-	-	-	V
LED FORWARD VOLTAGE	V_F	$I_F=110mA$	3.9	4.1	4.3	V
BRIGHTNESS	L	$I_F=110mA$	30	45	-	NIT
DRIVE METHOD			1/16 Duty			

Block Diagram

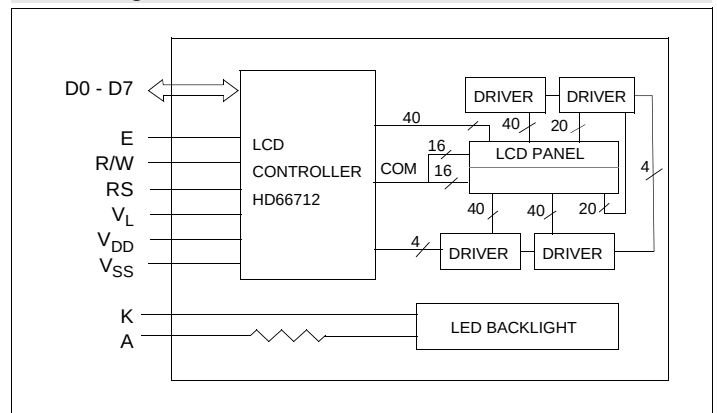

Pin Connections

PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V _{SS}	-	0V	Power supply
2	V _{DD}	-	5V	
3	V _L	-	-	
4	RS	H/L	H: Data input L: Instruction data input	
5	R/W	H/L	H: Data read L: Data write	
6	E	H,H→L	Enable signal	
7	D0	H/L	Data bus	
8	D1	H/L		
9	D2	H/L		
10	D3	H/L		
11	D4	H/L		
12	D5	H/L		
13	D6	H/L		
14	D7	H/L		
15	A	-	Anode for LED backlight	
16	K	-	Cathode for LED backlight	