



**RADIATION HARDENED  
POWER MOSFET  
SURFACE MOUNT (SMD-0.5)**

PD - 93829B

**IRHNJ7330SE  
JANSR2N7465U3  
400V, N-CHANNEL  
REF: MIL-PRF-19500/676  
RAD Hard™ HEXFET® TECHNOLOGY**

**Product Summary**

Part Number	Radiation Level	RDS(on)	ID	QPL Part Number
IRHNJ7330SE	100K Rads (Si)	1.39Ω	5.0A	JANSR2N7465U3



International Rectifier's RADHard™ HEXFET® MOSFET technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low RDS(on) and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

**Features:**

- Single Event Effect (SEE) Hardened
- Ultra Low RDS(on)
- Low Total Gate Charge
- Proton Tolerant
- Simple Drive Requirements
- Ease of Parallelizing
- Hermetically Sealed
- Surface Mount
- Ceramic Package
- Light Weight

**Absolute Maximum Ratings**

**Pre-Irradiation**

	Parameter	Units	
ID @ VGS = 12V, TC = 25°C	Continuous Drain Current	A	5.0
ID @ VGS = 12V, TC = 100°C	Continuous Drain Current		3.2
IMD	Pulsed Drain Current ①	W	20
PD @ TC = 25°C	Max. Power Dissipation		75
	Linear Derating Factor	W/C	0.6
VGS	Gate-to-Source Voltage		±20
EAS	Single Pulse Avalanche Energy ②	mJ	150
IA	Avalanche Current ①	A	5.0
EAR	Repetitive Avalanche Energy ①	mJ	7.5
dv/dt	Peak Diode Recovery dv/dt ③	V/ns	1.8
TJ	Operating Junction	°C	-55 to 150
TSTG	Storage Temperature Range		
	Pckg. Mounting Surface Temp.		300 (for 5s)
	Weight	g	1.0 (Typical)

For footnotes refer to the last page

**Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (Unless Otherwise Specified)**

	Parameter	Min	Typ	Max	Units	Test Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	400	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	—	0.48	—	$^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $\text{I}_D = 1.0\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	1.39	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 3.2\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.5	—	4.5	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = 1.0\text{mA}$
$g_{\text{fs}}$	Forward Transconductance	1.3	—	—	S (Ω)	$\text{V}_{\text{DS}} > 15\text{V}, \text{I}_{\text{DS}} = 3.2\text{A}$ ④
$\text{I}_{\text{DSS}}$	Zero Gate Voltage Drain Current	—	—	50	$\mu\text{A}$	$\text{V}_{\text{DS}} = 320\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	250		$\text{V}_{\text{DS}} = 320\text{V}, \text{V}_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Forward	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Reverse	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$Q_g$	Total Gate Charge	—	—	41	nC	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 5.0\text{A}$
$Q_{\text{gs}}$	Gate-to-Source Charge	—	—	7.0		$\text{V}_{\text{DS}} = 200\text{V}$
$Q_{\text{gd}}$	Gate-to-Drain ('Miller') Charge	—	—	20		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	25	ns	$\text{V}_{\text{DD}} = 200\text{V}, \text{I}_D = 5.0\text{A}, \text{V}_{\text{GS}} = 12\text{V}, \text{VR}_G = 7.5\Omega$
$t_r$	Rise Time	—	—	75		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	58		
$t_f$	Fall Time	—	—	58		
$L_S + L_D$	Total Inductance	—	4.0	—	nH	Measured from the center of drain pad to center of source pad
$C_{\text{iss}}$	Input Capacitance	—	600	—	pF	$\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = 25\text{V}$ $f = 1.0\text{MHz}$
$C_{\text{oss}}$	Output Capacitance	—	165	—		
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	60	—		

**Source-Drain Diode Ratings and Characteristics**

	Parameter	Min	Typ	Max	Units	Test Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	5.0	A	$T_J = 25^\circ\text{C}, I_S = 5.0\text{A}, V_{\text{GS}} = 0\text{V}$ ④
$I_{\text{SM}}$	Pulse Source Current (Body Diode) ①	—	—	20		
$V_{\text{SD}}$	Diode Forward Voltage	—	—	1.2	V	
$t_{\text{rr}}$	Reverse Recovery Time	—	—	516	nS	$T_J = 25^\circ\text{C}, I_F = 5.0\text{A}, dI/dt \leq 100\text{A}/\mu\text{s}$
$Q_{\text{RR}}$	Reverse Recovery Charge	—	—	3.8	$\mu\text{C}$	$\text{V}_{\text{DD}} \leq 50\text{V}$ ④
$t_{\text{on}}$	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $L_S + L_D$ .				

**Thermal Resistance**

	Parameter	Min	Typ	Max	Units	Test Conditions
$R_{\text{thJC}}$	Junction-to-Case	—	—	1.67	$^\circ\text{C}/\text{W}$	
$R_{\text{thJ-PCB}}$	Junction-to-PC board	—	6.9	—		soldered to a 2" square copper-clad board

Note: Corresponding Spice and Saber models are available on the G&S Website.

For footnotes refer to the last page

## Radiation Characteristics

**IRHNJ7330SE, JANSR2N7465U3**

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.


**Table 1. Electrical Characteristics @  $T_j = 25^\circ\text{C}$ , Post Total Dose Irradiation<sup>⑤⑥</sup>**

	Parameter	100K Rads (Si)		Units	Test Conditions <sup>⑧</sup>
		Min	Max		
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	400	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	4.5		$\text{V}_{\text{GS}} = \text{V}_{\text{DS}}, \text{I}_D = 1.0\text{mA}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Forward	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Reverse	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$\text{I}_{\text{DSS}}$	Zero Gate Voltage Drain Current	—	50	$\mu\text{A}$	$\text{V}_{\text{DS}} = 320\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source <sup>④</sup> On-State Resistance (TO-3)	—	1.39	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 3.2\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source <sup>④</sup> On-State Resistance (SMD-0.5)	—	1.39	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 3.2\text{A}$
$\text{V}_{\text{SD}}$	Diode Forward Voltage <sup>④</sup>	—	1.2	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 5.0\text{A}$

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

**Table 2. Single Event Effect Safe Operating Area**

Ion	LET MeV/(mg/cm <sup>2</sup> )	Energy (MeV)	Range (μm)	$\text{V}_{\text{DS}}$ (V)			
				@ $\text{V}_{\text{GS}}=0\text{V}$	@ $\text{V}_{\text{GS}}=-5\text{V}$	@ $\text{V}_{\text{GS}}=-10\text{V}$	@ $\text{V}_{\text{GS}}=-15\text{V}$
Cu	28	285	43	325	325	325	325
Br	36.8	305	39	325	325	325	275

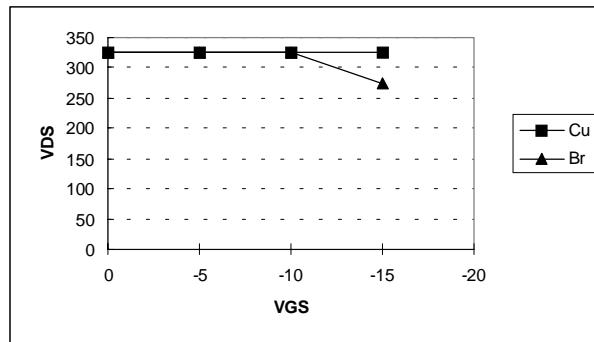


**Fig a. Single Event Effect, Safe Operating Area**


For footnotes refer to the last page

**IRHN7330SE, JANSR2N7465U3**


**Pre-Irradiation**

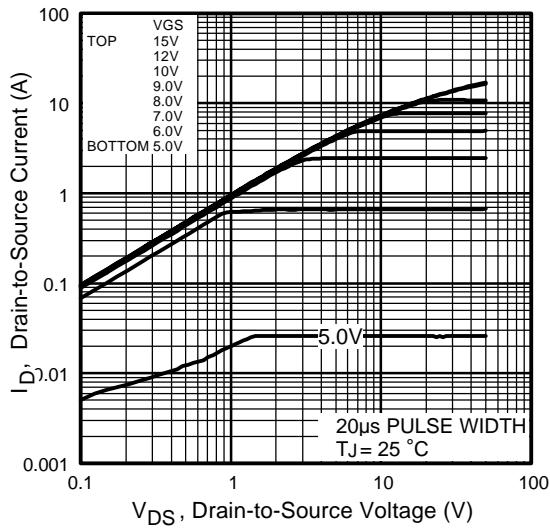


**Fig 1.** Typical Output Characteristics

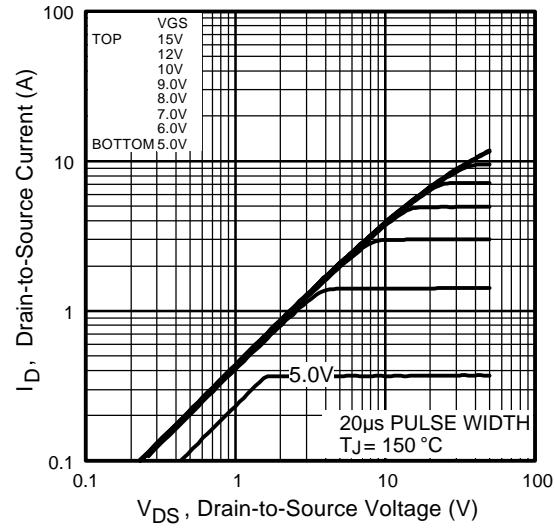

**Fig 2.** Typical Output Characteristics

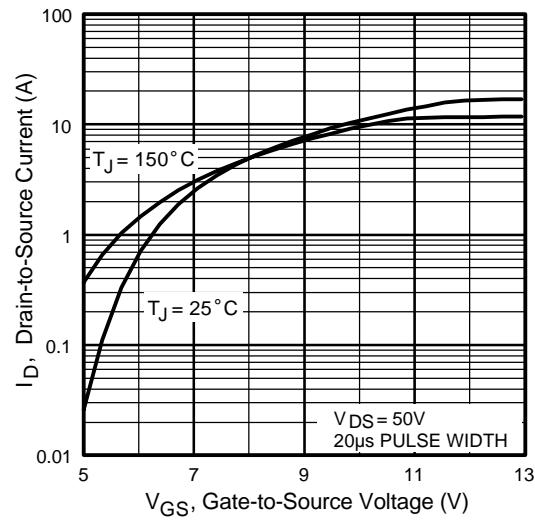


**Fig 3.** Typical Transfer Characteristics

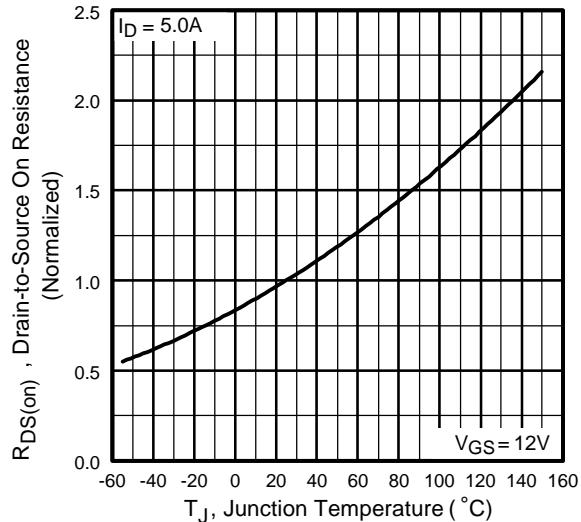


**Fig 4.** Normalized On-Resistance  
Vs. Temperature

## Pre-Irradiation


IRHNJ7330SE, JANSR2N7465U3

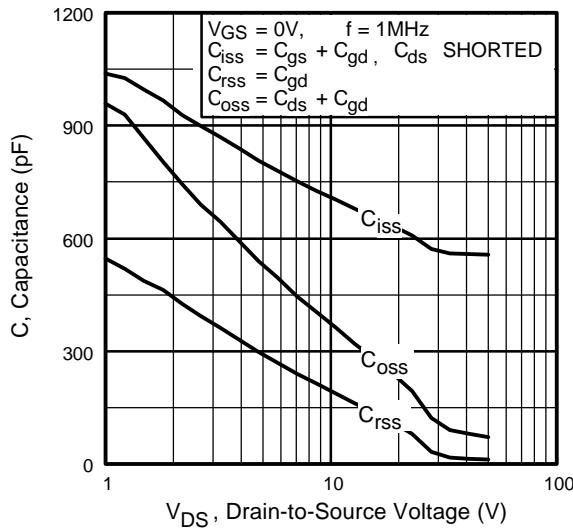


**Fig 5.** Typical Capacitance Vs.  
Drain-to-Source Voltage

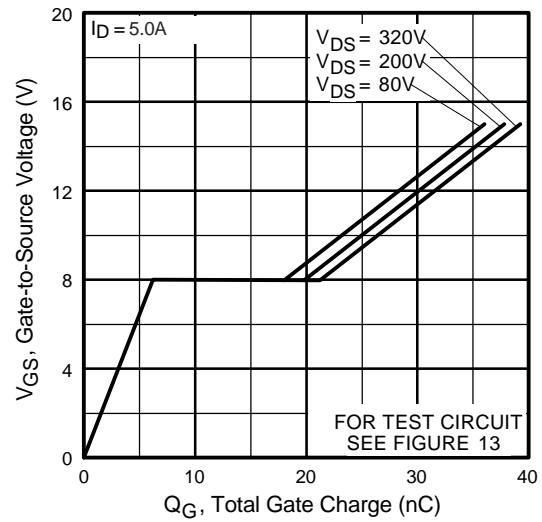


**Fig 6.** Typical Gate Charge Vs.  
Gate-to-Source Voltage

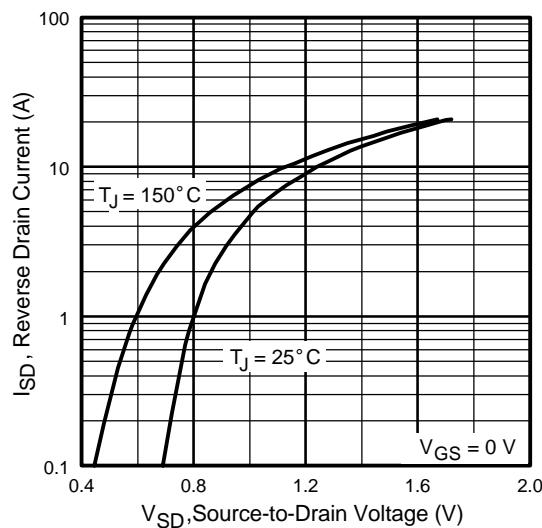


**Fig 7.** Typical Source-Drain Diode  
Forward Voltage

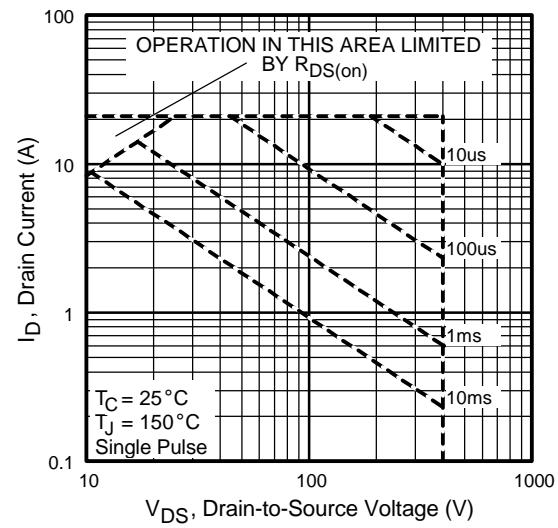


**Fig 8.** Maximum Safe Operating Area

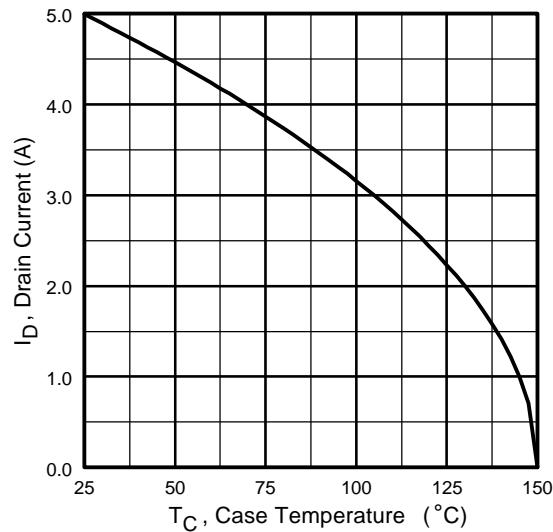


**Fig 9.** Maximum Drain Current Vs.  
Case Temperature

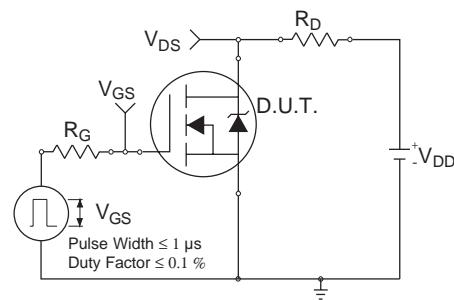

**Fig 10a.** Switching Time Test Circuit

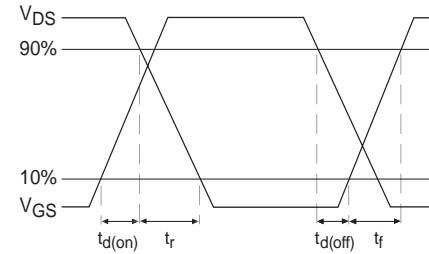


**Fig 10b.** Switching Time Waveforms

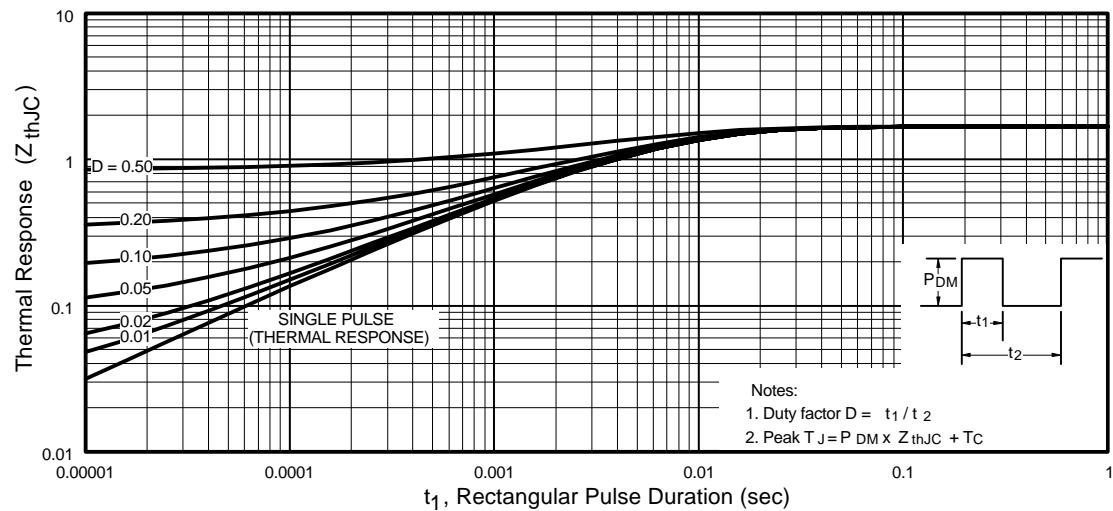


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

## Pre-Irradiation


IRHNJ7330SE, JANSR2N7465U3

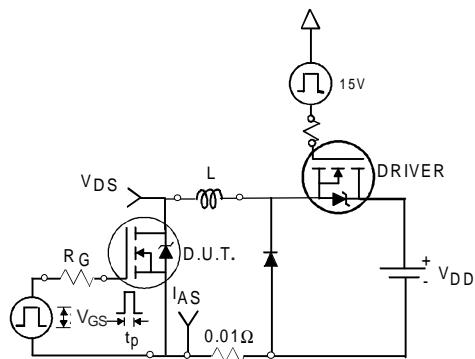


**Fig 12a.** Unclamped Inductive Test Circuit

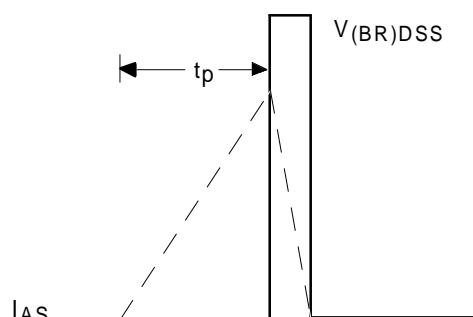


**Fig 12b.** Unclamped Inductive Waveforms

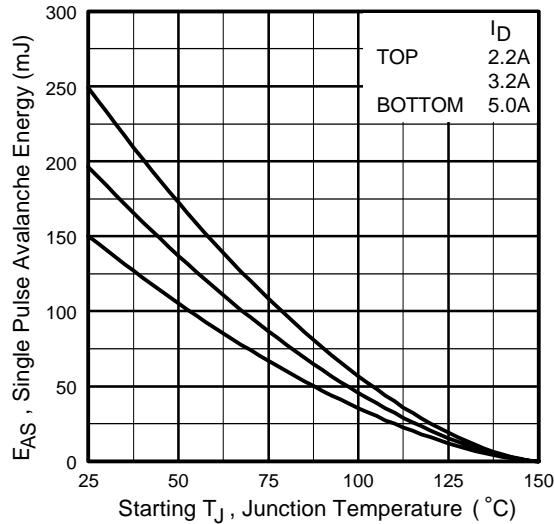

**Fig 12c.** Maximum Avalanche Energy Vs. Drain Current

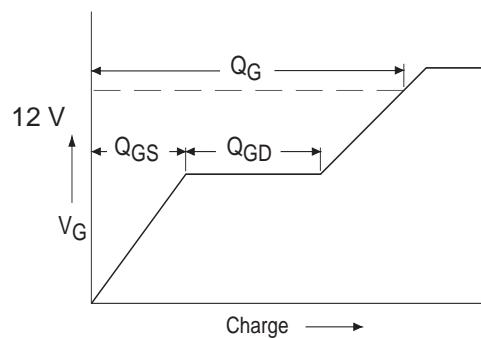


**Fig 13a.** Basic Gate Charge Waveform

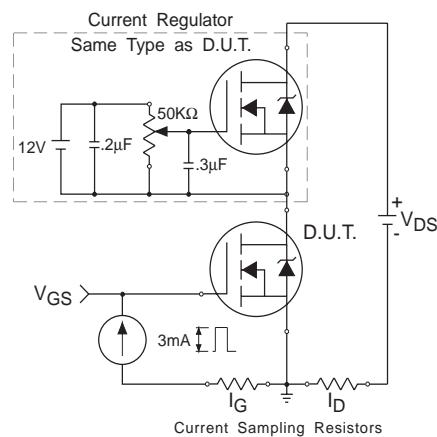

**Fig 13b.** Gate Charge Test Circuit

**Footnotes:**

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ②  $V_{DD} = 50V$ , starting  $T_J = 25^\circ C$ ,  $L = 12mH$   
Peak  $I_L = 5.0A$ ,  $V_{GS} = 12V$
- ③  $I_{SD} \leq 5.0A$ ,  $dI/dt \leq 240A/\mu s$ ,  
 $V_{DD} \leq 400V$ ,  $T_J \leq 150^\circ C$
- ④ Pulse width  $\leq 300 \mu s$ ; Duty Cycle  $\leq 2\%$
- ⑤ **Total Dose Irradiation with  $V_{GS}$  Bias.**  
12 volt  $V_{GS}$  applied and  $V_{DS} = 0$  during irradiation per MIL-STD-750, method 1019, condition A.
- ⑥ **Total Dose Irradiation with  $V_{DS}$  Bias.**  
320 volt  $V_{DS}$  applied and  $V_{GS} = 0$  during irradiation per MIL-STD-750, method 1019, condition A.

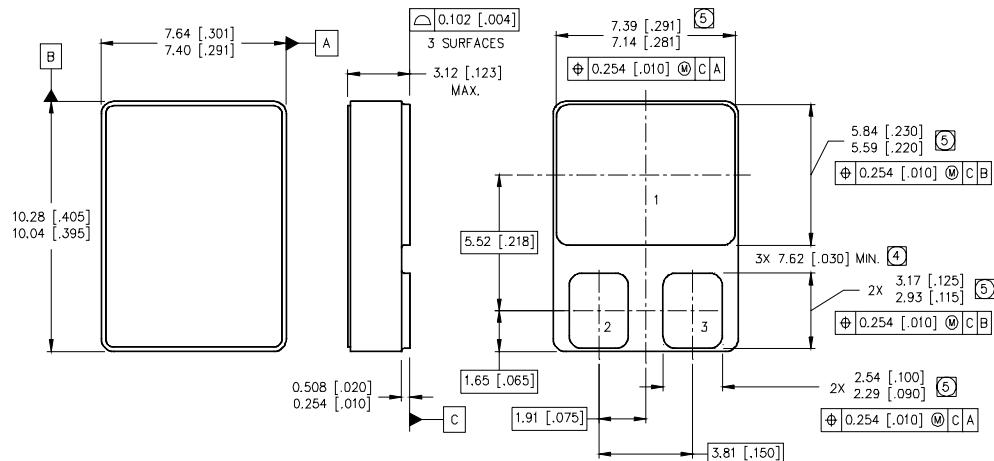**Case Outline and Dimensions — SMD-0.5****NOTES:**

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
- (4) DIMENSION INCLUDES METALLIZATION FLASH.  
(5) DIMENSION DOES NOT INCLUDE METALLIZATION FLASH.

**PAD ASSIGNMENTS**

- 1 = DRAIN  
2 = GATE  
3 = SOURCE

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information.  
*Data and specifications subject to change without notice. 02/03*