


KP8LU07

OUTLINE DIMENSIONS

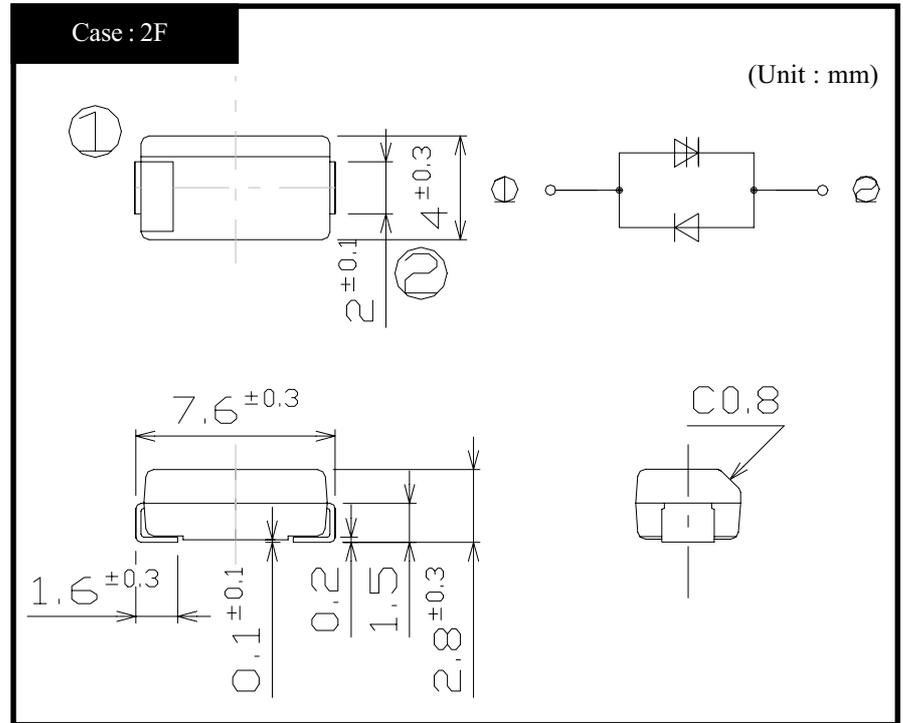

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~125	°C
Junction Temperature	T _j		125	°C
Maximum Off-State Voltage	V _{DRM}		58	V
Surge On-State Current	I _{TSM}	10/1000 μ s, Non-repetitive	80	A
		8/20 μ s, Non-repetitive	200	
Surge On-State Current	I _{FSM}	10/1000 μ s, Non-repetitive	80	

● Electrical Characteristics (Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Breakdown Voltage	V _{BR}	I _{BR} =1mA	Min 65	V
Off-State Current	I _{DRM}	V _D = V _{DRM}	Max 10	μ A
Holding Current	I _H	Pulse measurement	Min 100	mA
On-State Voltage	V _T	I _T = 2A	TYP 2.0	V
Junction Capacitance	C _j	f = 1kHz OSC = 20mV, V _D = 50V	Max 100	pF
Clamping Voltage	V _{CL}	dv/dt = 100V/μ s	Max 80	V