


2-Elektroden-Ableiter

2-Electrode Arresters

L7
Serie/Series

Folgestromtypen / Follow-On Current Types

5 kA / 5 A ■ Ø 8 x 8 mm

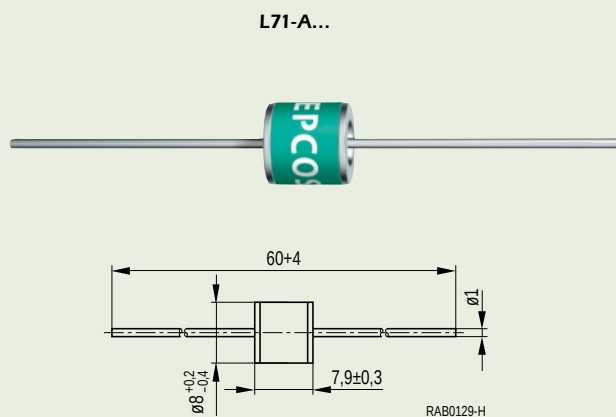

Typ / Type Bestell-Nr. / Ordering code	L71-A270X Q69-X203	L71-A470X Q69-X201	L71-A800X Q69-X204	
Nennansprechgleichspannung U_{agN} Nom. dc spark-over voltage V_{sdcN}	270	470	800	V
Toleranz der U_{agN} Tolerance of V_{sdcN}	-10/+ 25	-10/+ 25	-10/+ 25	%
Ansprechstoßspannung Impulse spark-over voltage				
@ 100 V/ μ s 99% der gemessenen Werte/ of measured values	< 500	< 700	< 1100	V
@ 100 V/ μ s typische Werte/ typical values of distribution	< 450	< 600	< 1000	V
@ 1 kV/ μ s 99% der gemessenen Werte/ of measured values	< 600	< 800	< 1200	V
@ 1 kV/ μ s typische Werte/ typical values of distribution	< 500	< 700	< 1100	V
Nennableitstoßstrom Nom. impulse discharge current Welle / Wave 8/20 μ s	5	5	5	kA
Nennableitwechselstrom Nom. alternating discharge current @ 50 Hz, 1 s	5	5	5	A
Max. Folgestrom während einer Spannungshalbwelle bei 50 Hz Max. follow-on current during 1 voltage half cycle at 50 Hz	200	200	200	A
Isolationswiderstand Insulation resistance	> 10	> 10	> 10	G Ω
Kapazität Capacitance	< 1,5	< 1,5	< 1,5	pF

**Herausgegeben von EPCOS AG, Marketing Kommunikation
Postfach 801709, 81617 München, DEUTSCHLAND**

☎ (089) 636-09, FAX (089) 636-2 2689

© EPCOS AG 2000. Alle Rechte vorbehalten. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Mit den Angaben in dieser Broschüre werden die Bauelemente spezifiziert, keine Eigenschaften zugesichert. Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird. Diese Broschüre ersetzt die vorige Ausgabe. Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG, Marketing Communications
P.O.B. 801709, 81617 Munich, GERMANY**

☎ ++49 89 636-09, FAX (089) 636-2 2689

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed. This brochure replaces the previous edition. For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives. Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.