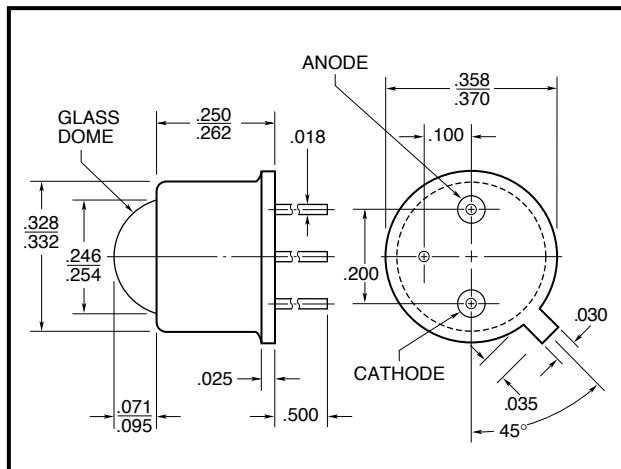


**FEATURES**

- 100 candela output
- Metal package for heatsinking
- Very narrow output beam
- Case electrically isolated

All surfaces are gold plated. Dimensions are nominal values in inches unless otherwise specified.

ELECTRO-OPTICAL CHARACTERISTICS AT 25°C

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Luminous Intensity ¹	$I_F = 300\text{mA}$	80	100		cd
Total Power Output, P_O	$I_F = 300\text{mA}$		8		mW
Peak Emission Wavelength, λ_P	$I_F = 50\text{mA}$	462	470	475	nm
Spectral Bandwidth at 50%, $\Delta\lambda$			40		nm
Half Intensity Beam Angle, θ			7		Deg
Forward Voltage, V_F	$I_F = 300\text{mA}$		3.6	4.0	Volts
Reverse Breakdown Voltage, V_R	$I_R = 10\mu\text{A}$	2	5		Volts

ABSOLUTE MAXIMUM RATINGS AT 25°C CASE

Power Dissipation ²	1200mW
Continuous Forward Current ²	300mA
Reverse Voltage	2V
Lead Soldering Temperature (1/16" from case for 10sec)	240°C

THERMAL PARAMETERS

Storage and Operating Temperature Range	-40°C TO 100°C
Maximum Junction Temperature	100°C
Thermal Dissipation Junction-Case	75°C/W Typical
Thermal Dissipation Junction-Air	145°C/W Typical

¹ As measured within a 2.0° field of view.

² Derate per appropriate thermal dissipation value above 25°C.

