




- ◆ Dual Surface Mount Type.
- ◆ Meet CCITT & FCC designed.
- ◆ High isolation voltage 2,000Vrms

Specification :

Parts No	Turn Ratio	OCL (mH)min	L _L (uh)max	C _{ww} (pF)max	DCR Pri (Ω)max	DCR sec (Ω)max
PI166001	1:1 & 1:2	22	5.0 & 5.0	100	2.60 & 2.60	2.60 & 4.50
PI166002	1:1 & 1:1	22	5.0 & 5.0	100	2.60 & 2.60	2.60 & 2.60
PI166003	1:2 & 1:2	22	11.0 & 11.0	100	2.60 & 2.60	5.50 & 5.50
PI166004	1:2.5 & 1:2.5	22	40.0 & 40.0	100	3.00 & 3.00	6.20 & 6.20
PI166005	1:2 & 1:2	22	11.0 & 11.0	100	2.60 & 2.60	5.00 & 5.00
PI166006	1:1.8 & 1:1.8	22	15.0 & 15.0	100	2.60 & 2.60	5.00 & 5.00
PI166363	1:2.5 & 1:1	22	15.0 & 15.0	100	2.50 & 2.50	5.00 & 5.00
PI166843	1:2 & 1:2	23	--	120	1.60 & 1.60	2.40 & 2.40

Schematic :

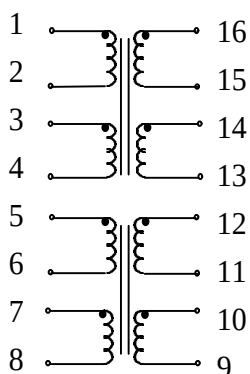

Dimension : mm(inch)±0.25(0.010)

