

FRD MODULE 30A/800V/trr:60nsec

PC30F8


OUTLINE DRAWING

FEATURES

- * Isolated Base
- * Dual Diode Cathode Common
- * Ultra Fast Recovery
- * High Surge Capability
- * UL Recognized, File No. E187184

TYPICAL APPLICATIONS

- * High Frequency Rectification

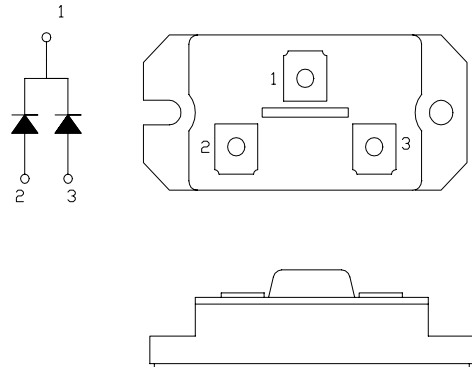

Maximum Ratings

Approx Net Weight:105g

Voltage Rating	Symbol	PC30F8		Unit
Repetitive Peak Reverse Voltage per Arm	V_{RRM}	800		V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	880		V
Electrical Rating		Condition	Rating	
Average Rectified Output Current	I_O	50Hz Half Sine Wave condition per Arm $T_c=87^{\circ}C$	50	A
RMS Forward Current	$I_{F(RMS)}$	per Arm	47	A
Surge Forward Current	I_{FSM}	50 Hz Half Sine Wave, 1 cycle Non-repetitive per Arm	450	A
I Squared t	I^2t	2 msec to 10 msec per Arm	1000	A^2s
Operating Junction Temperature Range	T_{jw}		-40 to +150	$^{\circ}C$
Storage Temperature Range	T_{stg}		-40 to +125	$^{\circ}C$
Isolation Voltage	V_{iso}	Base Plate to Terminal, AC1min	2000	V
Mounting torque	F_{tor}	Case mounting(recommended)	2.6	N.m
		Terminal Screw(recommended)	1.4	

Electrical • Thermal Characteristics

Characteristics	Symbol	Test Conditions	Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM}= 30A$, $T_j=25^{\circ}C$, per Arm	2.50	V
Peak Reverse Current	I_{RM}	$V_{RM}= V_{RRM}$, $T_j= 150^{\circ}C$, per Arm	2	mA
Reverse Recovery Time	trr	$I_{FM}= 10A$, $-di/dt= 50 A/\mu s$, $T_a= 25^{\circ}C$ Per Arm	60	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case per Arm	0.8	$^{\circ}C/W$
	$R_{th(c-f)}$	Base Plate to Heat Sink with Thermal Compound	0.1	
Internal Lead Inductance	L_s	Anode Terminal to Cathode Terminal Per Element	30	nH

PC30F8 OUTLINE DRAWING (Dimensions in mm)

