**DO-204AC (DO-15)****TRANSZORB® Transient Voltage Suppressors****V_(BR) Unidirectional** 6.8 to 540V
V_(BR) Bidirectional 6.8 to 440V
Peak Pulse Power 600W**Features**

- Underwriters Laboratory Recognition under UL standard for safety 497B: Isolated Loop Circuit Protection
- Glass passivated junction
- 600W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01%
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time


Mechanical Data**Case:** JEDEC DO-204AC molded plastic body over passivated junction**Terminals:** Solder plated axial leads, solderable per MIL-STD-750, Method 2026**High temp. soldering guaranteed:** 265°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension**Polarity:** For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation**Mounting Position:** Any **Weight:** 0.015oz., 0.4g**Flammability:** Epoxy is rated UL 94V-0**Packaging Codes – Options (Antistatic):**

51 – 1K per Bulk box, 10K/carton

54 – 4K per 13" paper Reel

(52mm horiz. tape), 12K/carton

73 – 2K per horiz. tape & Ammo box, 20K/carton

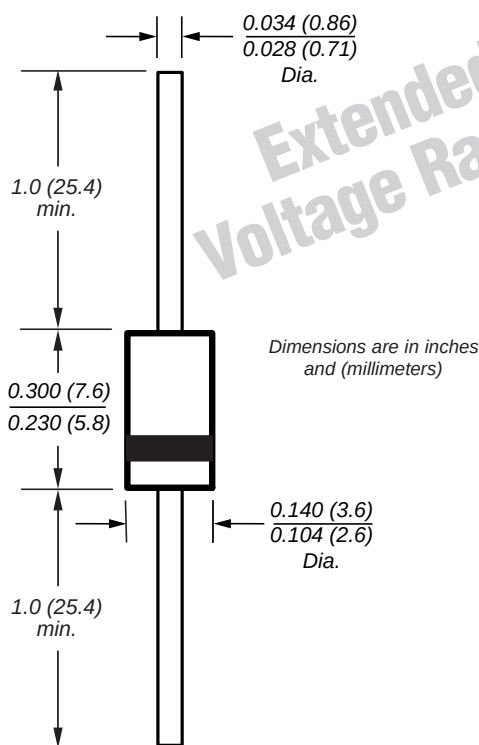Dimensions are in inches
and (millimeters)

*Voltages above 440V available Q2-2002

Devices for Bidirectional Applications

For bi-directional devices, use suffix C or CA for types P6KE6.8 through types P6KE440 (e.g. P6KE6.8C, P6KE440CA). Electrical characteristics apply in both directions.

Maximum Ratings and Characteristics T_A=25°C unless otherwise noted.

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 1)	PPPM	600	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	IPPM	See Next Table	A
Steady state power dissipation at T _L =75°C, lead lengths 0.375" (9.5mm) ⁽²⁾	P _{M(AV)}	5.0	W
Peak forward surge current, 8.3ms single half sine-wave ⁽³⁾	I _{FSM}	100	A
Maximum instantaneous forward voltage at 50A for unidirectional only ⁽⁴⁾	V _F	3.5/5.0	V
Typical thermal resistance junction-to-lead	R _{θJL}	20	°C/W
Typical thermal resistance junction-to-ambient	R _{θJA}	75	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +175	°C

Notes: (1) Non-repetitive current pulse, per Fig.3 and derated above T_A = 25°C per Fig. 2

(2) Mounted on copper pad area of 1.6 x 1.6" (40 x 40mm) per Fig. 5

(3) Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 per minute maximum

(4) V_F = 3.5V for P6KE220(A) & below; V_F = 5.0V for P6KE250(A) & above

P6KE Series

Vishay Semiconductors
formerly General Semiconductor



Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Device Type	Breakdown Voltage $V_{(BR)}$ at $I_T^{(1)}$ (V)		Test Current I_T (mA)	Stand-off Voltage V_{WM} (V)	Maximum Reverse Leakage at $V_{WM}^{(3)}$ I_D (μA)	Peak Pulse Current $I_{PPM}^{(2)}$ (A)	Maximum Clamping Voltage at I_{PPM} V_C (V)	Maximum Temperature Coefficient of $V_{(BR)}$ (% / °C)
	Min	Max						
+P6KE6.8	6.12	7.48	10	5.50	1000	55.6	10.8	0.057
+P6KE6.8A	6.45	7.14	10	5.80	1000	57.1	10.5	0.057
+P6KE7.5	6.75	8.25	10	6.05	500	51.3	11.7	0.061
+P6KE7.5A	7.13	7.88	10	6.40	500	53.1	11.3	0.061
+P6KE8.2	7.38	9.02	10	6.63	200	48.0	12.5	0.065
+P6KE8.2A	7.79	8.61	10	7.02	200	49.6	12.1	0.065
+P6KE9.1	8.19	10.0	1.0	7.37	50	43.5	13.8	0.068
+P6KE9.1A	8.65	9.55	1.0	7.78	50	44.8	13.4	0.068
+P6KE10	9.00	11.0	1.0	8.10	10	40.0	15.0	0.073
+P6KE10A	9.50	10.5	1.0	8.55	10	41.4	14.5	0.073
+P6KE11	9.90	12.1	1.0	8.92	5.0	37.0	16.2	0.075
+P6KE11A	10.5	11.6	1.0	9.40	5.0	38.5	15.6	0.075
+P6KE12	10.8	13.2	1.0	9.72	5.0	34.7	17.3	0.078
+P6KE12A	11.4	12.6	1.0	10.2	5.0	35.9	16.7	0.078
+P6KE13	11.7	14.3	1.0	10.5	5.0	31.6	19.0	0.081
+P6KE13A	12.4	13.7	1.0	11.1	5.0	33.0	18.2	0.081
+P6KE15	13.5	16.5	1.0	12.1	1.0	27.3	22.0	0.084
+P6KE15A	14.3	15.8	1.0	12.8	1.0	28.3	21.2	0.084
+P6KE16	14.4	17.6	1.0	12.9	1.0	25.5	23.5	0.086
+P6KE16A	15.2	16.8	1.0	13.6	1.0	26.7	22.5	0.086
+P6KE18	16.2	19.8	1.0	14.5	1.0	22.6	26.5	0.088
+P6KE18A	17.1	18.9	1.0	15.3	1.0	23.8	25.2	0.088
+P6KE20	18.0	22.0	1.0	16.2	1.0	20.6	29.1	0.090
+P6KE20A	19.0	21.0	1.0	17.1	1.0	21.7	27.7	0.090
+P6KE22	19.8	24.2	1.0	17.8	1.0	18.8	31.9	0.092
+P6KE22A	20.9	23.1	1.0	18.8	1.0	19.6	30.6	0.092
+P6KE24	21.6	26.4	1.0	19.4	1.0	17.3	34.7	0.094
+P6KE24A	22.8	25.2	1.0	20.5	1.0	18.1	33.2	0.094
+P6KE27	24.3	29.7	1.0	21.8	1.0	15.3	39.1	0.096
+P6KE27A	25.7	28.4	1.0	23.1	1.0	16.0	37.5	0.096
+P6KE30	27.0	33.0	1.0	24.3	1.0	13.8	43.5	0.097
+P6KE30A	28.5	31.5	1.0	25.6	1.0	14.5	41.4	0.097
+P6KE33	29.7	36.3	1.0	26.8	1.0	12.6	47.7	0.098
+P6KE33A	31.4	34.7	1.0	28.2	1.0	13.1	45.7	0.098
+P6KE36	32.4	39.6	1.0	29.1	1.0	11.5	52.0	0.099
+P6KE36A	34.2	37.8	1.0	30.8	1.0	12.0	49.9	0.099
+P6KE39	35.1	42.9	1.0	31.6	1.0	10.6	56.4	0.100
+P6KE39A	37.1	41.0	1.0	33.3	1.0	11.1	53.9	0.100
+P6KE43	38.7	47.3	1.0	34.8	1.0	9.7	61.9	0.101
+P6KE43A	40.9	45.2	1.0	36.8	1.0	10.1	59.3	0.101
+P6KE47	42.3	51.7	1.0	38.1	1.0	8.8	67.8	0.101
+P6KE47A	44.7	49.4	1.0	40.2	1.0	9.3	64.8	0.101
+P6KE51	45.9	56.1	1.0	41.3	1.0	8.2	73.5	0.102
+P6KE51A	48.5	53.6	1.0	43.6	1.0	8.6	70.1	0.102
+P6KE56	50.4	61.6	1.0	45.4	1.0	7.5	80.5	0.103
+P6KE56A	53.2	58.8	1.0	47.8	1.0	7.8	77.0	0.103
+P6KE62	55.8	68.2	1.0	50.2	1.0	6.7	89.0	0.104
+P6KE62A	58.9	65.1	1.0	53.0	1.0	7.1	85.0	0.104
+P6KE68	61.2	74.8	1.0	55.1	1.0	6.1	98.0	0.104
+P6KE68A	64.6	71.4	1.0	58.1	1.0	6.5	92.0	0.104
+P6KE75	67.5	82.5	1.0	60.7	1.0	5.6	108	0.105
+P6KE75A	71.3	78.8	1.0	64.1	1.0	5.8	103	0.105
+P6KE82	73.8	90.2	1.0	66.4	1.0	5.1	118	0.105

+ Underwriters Laboratory Recognition for the classification of protectors (QVGQ2) under the UL standard for safety 497B and file number E136766 for both uni-directional and bi-directional devices



Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Device Type	Breakdown Voltage $V_{(BR)}$ at $I_T^{(1)}$ (V)		Test Current I_T (mA)	Stand-off Voltage V_{WM} (V)	Maximum Reverse Leakage at V_{WM} I_D (μA) ⁽³⁾	Maximum Peak Pulse Current I_{PPM} (A) ⁽²⁾	Maximum Clamping Voltage at I_{PPM} V_C (V)	Maximum Temperature Coefficient of $V_{(BR)}$ (% / °C)
	Min	Max						
+P6KE82A	77.9	86.1	1.0	70.1	1.0	5.3	113	0.105
+P6KE91	81.9	100	1.0	73.7	1.0	4.6	131	0.106
+P6KE91A	86.5	95.5	1.0	77.8	1.0	4.8	125	0.106
+P6KE100	90.0	110	1.0	81.0	1.0	4.2	144	0.106
+P6KE100A	95.0	105	1.0	85.5	1.0	4.4	137	0.106
+P6KE110	99.0	121	1.0	89.2	1.0	3.8	158	0.107
+P6KE110A	105	116	1.0	94.0	1.0	3.9	152	0.107
+P6KE120	108	132	1.0	97.2	1.0	3.5	173	0.107
+P6KE120A	114	126	1.0	102	1.0	3.6	165	0.107
+P6KE130	117	143	1.0	105	1.0	3.2	187	0.107
+P6KE130A	124	137	1.0	111	1.0	3.4	179	0.107
+P6KE150	135	165	1.0	121	1.0	2.8	215	0.108
+P6KE150A	143	158	1.0	128	1.0	2.9	207	0.108
+P6KE160	144	176	1.0	130	1.0	2.6	230	0.108
+P6KE160A	152	168	1.0	136	1.0	2.7	219	0.108
+P6KE170	153	187	1.0	138	1.0	2.5	244	0.108
+P6KE170A	162	179	1.0	145	1.0	2.6	234	0.108
+P6KE180	162	198	1.0	146	1.0	2.3	258	0.108
+P6KE180A	171	189	1.0	154	1.0	2.4	246	0.108
+P6KE200	180	220	1.0	162	1.0	2.1	287	0.108
+P6KE200A	190	210	1.0	171	1.0	2.2	274	0.108
+P6KE220	198	242	1.0	175	1.0	1.7	344	0.108
+P6KE220A	209	231	1.0	185	1.0	1.8	328	0.108
+P6KE250	225	275	1.0	202	1.0	1.7	360	0.110
+P6KE250A	237	263	1.0	214	1.0	1.7	344	0.110
+P6KE300	270	330	1.0	243	1.0	1.4	430	0.110
+P6KE300A	285	315	1.0	256	1.0	1.4	414	0.110
+P6KE350	315	385	1.0	284	1.0	1.2	504	0.110
+P6KE350A	333	368	1.0	300	1.0	1.2	482	0.110
+P6KE400	360	440	1.0	324	1.0	1.0	574	0.110
+P6KE400A	380	420	1.0	342	1.0	1.1	548	0.110
+P6KE440	396	484	1.0	356	1.0	0.95	631	0.110
+P6KE440A	418	462	1.0	376	1.0	1.0	602	0.110
P6KE480	432	528	1.0	389	1.0	0.88	686	0.110
P6KE480A	456	504	1.0	408	1.0	0.91	658	0.110
P6KE510	459	561	1.0	413	1.0	0.82	729	0.110
P6KE510A	485	535	1.0	434	1.0	0.86	698	0.110
P6KE540	486	594	1.0	437	1.0	0.78	772	0.110
P6KE540A	513	567	1.0	459	1.0	0.81	740	0.110

Notes: (1) Pulse test: $t_p \leq 50ms$

(2) Surge current waveform per Fig. 3 and derate per Fig. 2

(3) For bidirectional types with V_{WM} of 10 volts and less, the I_D limit is doubled

(4) All terms and symbols are consistent with ANSI/IEEE C62.35

+ Underwriters Laboratory Recognition for the classification of protectors (QVGQ2) under the UL standard for safety 497B and file number E136766 for both uni-directional and bi-directional devices

Description

This P6KE TVS series is a low cost commercial product for use in applications where large voltage transients can permanently damage voltage-sensitive components. The P6KE series device types are designed in a small package size where power and space is a consideration. They are characterized by their high surge capability, extremely fast response time, and low impedance, (R_{on}). Because of the unpredictable nature of transients, and the variation of the impedance with respect to these transients, impedance, per se, is not specified as a parametric value. However, a minimum voltage at low current conditions (BV) and a maximum clamping voltage (V_C) at a maximum peak pulse current is specified.

In some instances, the thermal effect (see V_C Clamping Voltage) may be responsible for 50% to 70% of the observed voltage differential when subjected to high current pulses for several duty cycles, thus making a maximum impedance specification insignificant.

In case of a severe current overload or abnormal transient beyond the maximum ratings, the Transient Voltage Suppressor will initially fail 'short' thus tripping the system's circuit breaker or fuse while protecting the entire circuit. Curves depicting clamping voltage vs. various current pulses are available from the factory. Extended power curves vs. pulse time are also available.

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted.)

Fig. 1 – Peak Pulse Power Rating Curve

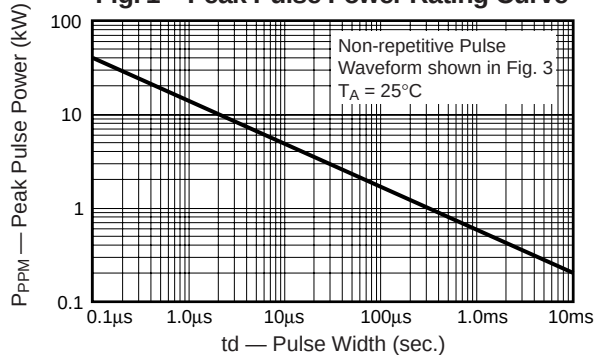


Fig. 2 – Pulse Derating Curve

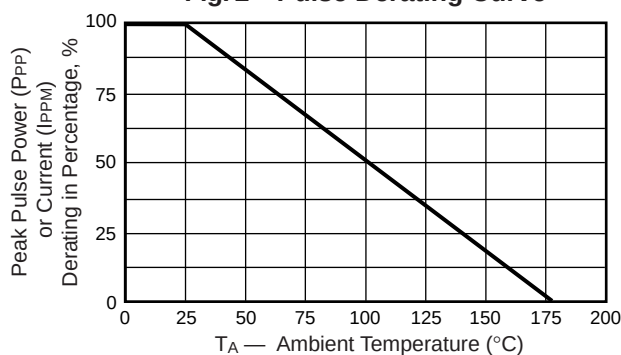


Fig. 3 – Pulse Waveform

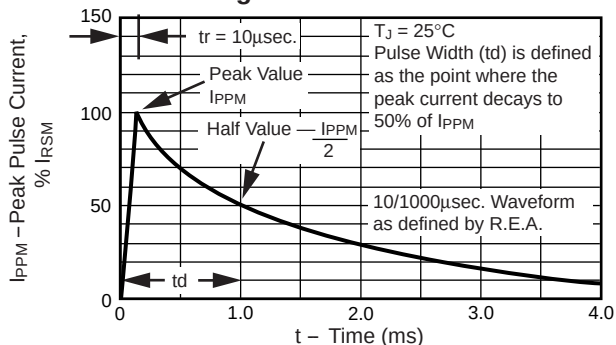


Fig. 4 – Typ. Junction Capacitance Uni-Directional

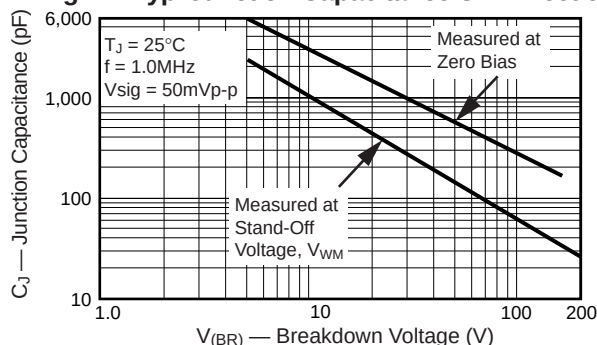


Fig. 5 – Steady State Power Derating Curve

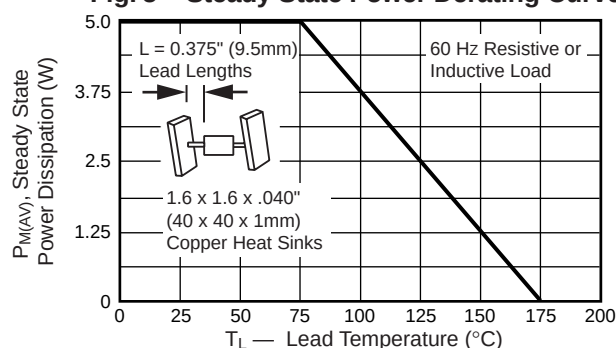


Fig. 6 - Max. Non-Repetitive Forward Surge Current

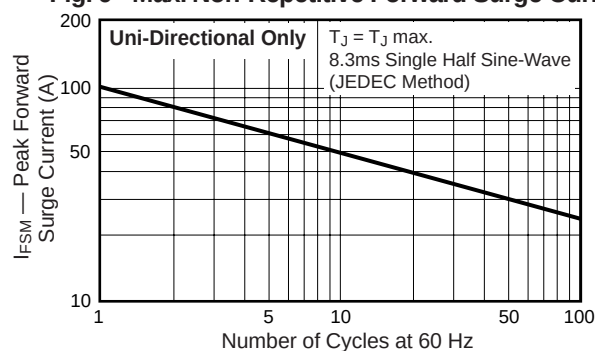


Fig. 7 – Typ. Reverse Leakage Characteristics

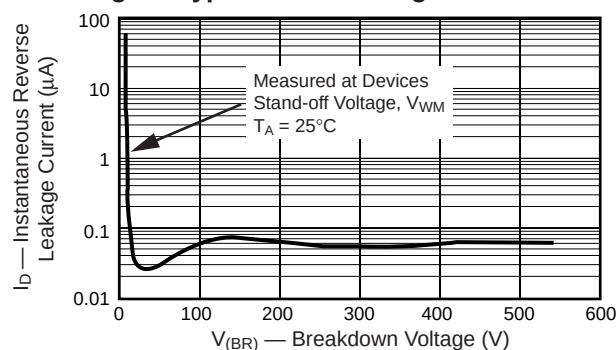


Fig. 8 – Typ. Transient Thermal Impedance

