



SAW Components

Data Sheet R 719

Data Sheet



SAW Components	R 719
Resonator	304,25 MHz

Data Sheet


Ceramic package **QCC8C**

Features

- 1-port resonator
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators

Terminals


- Ni, gold plated

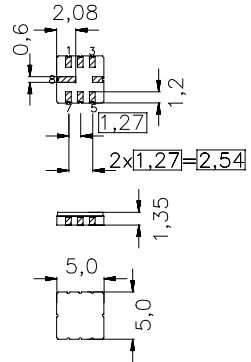

Dimensions in mm, approx. weight 0,1 g

Pin configuration

2	Input
6	Ground
4,8	Ground (case)



Type	Ordering code	Marking and Package according to	Packing according to
R 719	B39301-R 719-U310	C61157-A7-A56	F61074-V8023-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-45/+85	°C	between any terminals
Storage temperature range	T_{stg}	-45/+85	°C	
DC voltage	V_{DC}	12	V	
Source power	P_s	0	dBm	

Data Sheet

Characteristics

Reference temperature: $T_A = 25\text{ °C}$
Terminating Source impedance: $Z_S = 50\text{ }\Omega$
Terminating Load impedance: $Z_L = 50\text{ }\Omega$

		min.	typ.	max.	
Center frequency ¹⁾	f_c	304,175	304,25	304,325	MHz
Minimum insertion attenuation	$\alpha_{\min}$	—	1,7	2,4	dB
Unloaded quality factor	Q_U	8000	13500	—	
Ageing of f_c		—	—	± 50	ppm
Equivalent circuit elements					
Motional capacitance	C_1	—	1,754	—	fF
Motional inductance	L_1	—	156	—	μH
Motional resistance	R_1	—	23	36	Ω
Parallel Capacitance	C_0	—	3,1	—	pF
Temperature coefficient of frequency ²⁾	TC_f	—	-0,032	—	ppm/K ²
Turnover temperature	T_0	25	—	55	°C

¹⁾ Center frequency is defined as maximum of the real part of the admittance

²⁾ Temperature dependence of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$

Published by EPCOS AG

Surface Acoustic Wave Components Division, OFW E UE

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.