



Technical Specification for Optical Transceiver Module

SCM6202-GL

<input type="checkbox"/> 155.52Mb/s	<input checked="" type="checkbox"/> 622.08Mb/s	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> Short Haul	<input type="checkbox"/> Long Haul	<input type="checkbox"/> other _____
<input type="checkbox"/> Intermediate Reach	<input checked="" type="checkbox"/> Long Reach	<input type="checkbox"/> other _____
<input type="checkbox"/> Single 5.0 V	<input checked="" type="checkbox"/> Single 3.3 V	<input type="checkbox"/> other _____
<input checked="" type="checkbox"/> 1.3 μ m	<input type="checkbox"/> 1.55 μ m	<input type="checkbox"/> other _____
<input type="checkbox"/> Transmitter	<input type="checkbox"/> Receiver	<input checked="" type="checkbox"/> Transceiver
	(<input type="checkbox"/> 2R / <input type="checkbox"/> 3R)	(<input checked="" type="checkbox"/> 2R / <input type="checkbox"/> 3R)

Applicable Part Numbers : SCM6202-GL-ZN, SCM6202-GL-CN



Sumitomo Electric reserves the right to make changes in this specification without prior notice.

#Safety Precaution Symbols This specification uses various picture symbols to prevent possible injury to operator or other persons or damage to properties for appropriate use of the product. The symbols and definitions are as shown below. Be sure to be familiar with these symbols before reading this specification.

	Warning	Wrong operation without following this instruction may lead to human death or serious injury.
	Caution	Wrong operation without following this instruction may lead to human injury or property damage.

Example of picture symbols



indicates prohibition of actions. Action details are explained thereafter.



indicates compulsory actions or instructions. Action details are explained thereafter.

1. General

Features of SCM6202-GL are listed below.

- * SDH STM-4 S-4.1 / SONET OC-12 IR-1 Compliant
- * Power Supply Voltage Single +3.3V
- * Compact Package Size 49.0 X 13.59 X 9.4 mm (max.)
- * Electrical Interface LVPECL for DATA and Signal Detect, LVTTTL for Laser Disable
- * Fiber Coupled Power -8 ~ -15dBm (Typ. -11dBm) into SMF
- * Input Power Range -8 ~ -28dBm (Typ. Sensitivity -33dBm)
- * Laser Disable Function
- * Signal Detect (SD) Function
- * Connector Interface LC Duplex Receptacle

2. Block Diagram

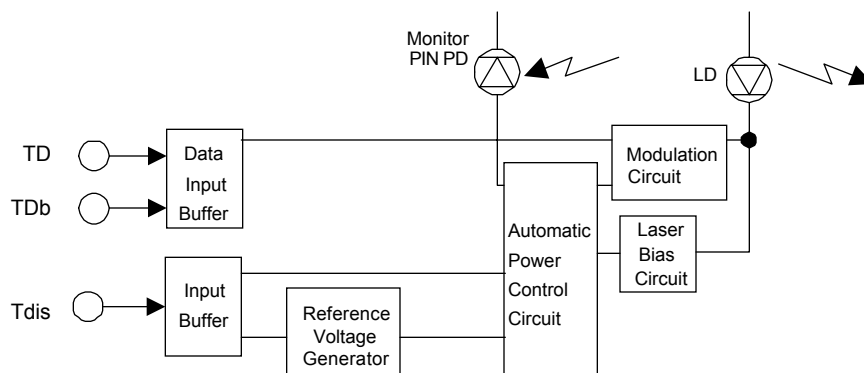


Figure 1-1. Block Diagram (Transmitter)

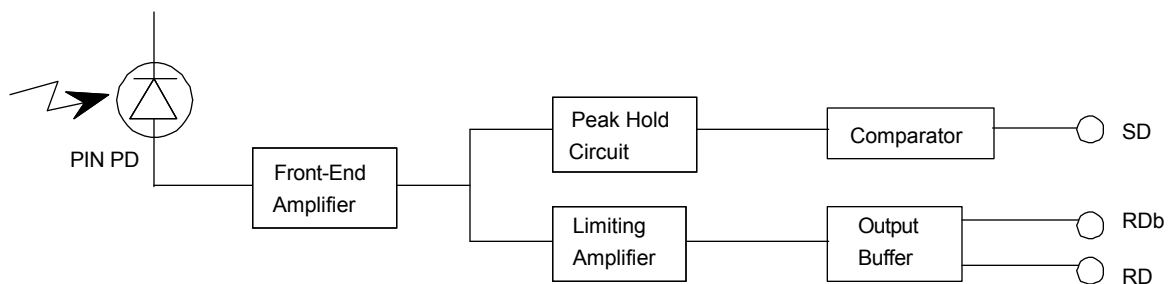


Figure 1-2. Block Diagram (Receiver)

⚠ Caution



Do not disassemble this product. Otherwise, failure, electrical shock, overheating or fire may occur.

Handle the lead pins carefully. Use assisting tools or prospective aids as required. A lead pin may injure skin or human body

3. Package Dimension

All dimensions are in mm.

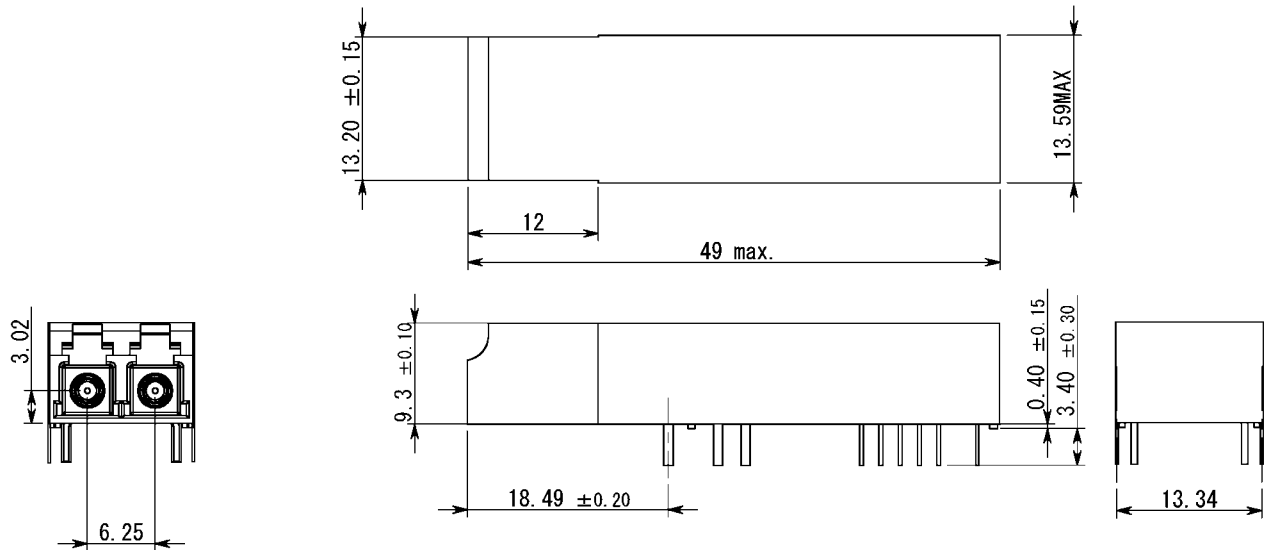


Figure 2-1. Outline Dimensions (SCM6202-GL-Z#)

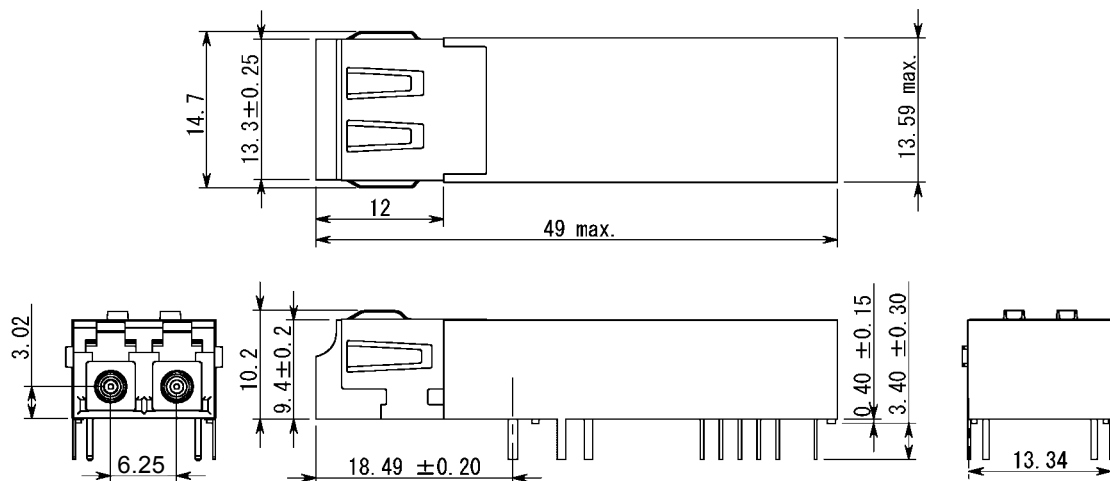


Figure 2-2. Outline Dimensions (SCM6202-GL-C#)



No.	Symbol	I/O/P	Level	Description
1	VeeR	P	GND	Power Supply (-) for Receiver.
2	VccR	P	+3.3V DC	Power Supply (+) for Receiver.
3	SD	O	LVPECL	Signal Detect. High level indicates presence of optical input signal (Active High).
4	RDb	O	LVPECL	Inverted Receiver Output Data. No internal terminations are provided.
5	RD	O	LVPECL	Non-Inverted Receiver Output Data. No internal terminations are provided.
6	VccT	P	+3.3V DC	Power Supply (+) for Transmitter.
7	VeeT	P	GND	Power Supply (-) for Transmitter.
8	Tdis	I	LVTTTL/LVCMOS	Transmitter Disable (Active High). Defaults to logic 0 (enable TX) when left open.
9	TD	I	LVPECL	Non-Inverted Transmitter Input Data. Self biased. Not internally terminated.
10	TDb	I	LVPECL	Inverted Transmitter Input Data. Self biased. Not internally terminated.

1. I/O/P stands for signal input, signal output, and DC power/bias supply, respectively.



Parameter	Symbol	min.	Max	Unit	Note
Storage Case Temperature	Ts	-40	85	°C	1
Operating Case Teperature	Tc	-5	70	°C	2
		-40	85		3
Supply Voltage	Vcc	0.0	4.0	V	
Input Voltage	Vi	0.0	Vcc+0.5	V	4
Lead Soldering Conditions	Temperature		260	°C	5
	Time		10	sec.	

4. TD, TD_b, TD_{is} 5. Measured on lead pin at 2mm (0.079in.) off the package bottom

⚠ Warning

! Use the product with the rated voltage described in the specification. If the voltage exceeds the maximum rating, overheating or fire may occur.

⚠ Caution

⊘ Do not store the product in the area where temperature exceeds the maximum rating, where there is too much moisture or dampness, where there is acid gas or corrosive gas, or other extreme conditions. Otherwise, failure, overheating or fire may occur.

6. Electrical Interface

(Unless otherwise specified, Vcc = 3.14 to 3.47 V and all operating temperature shall apply.)

6-1. Transmitter side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Supply Voltage	Vcc	3.14	3.30	3.47	V	
Supply Current	Idtx		70	150	mA	1, 2, 3
TD, TD _b Input Voltage	High	V _{ih}	Vcc-1.17	Vcc-0.73	V	4, 5, 6
	Low	V _{il}	Vcc-1.95	Vcc-1.45	V	
Signal Input Rise / Fall Time				0.5	nsec.	7
Tdis Input Voltage	High	V _{di}	2.0	Vcc	V	8
	Low	V _{ei}	0.0	0.8	V	
Tdis Input Current	High	I _{di}	-10	140	μA	

Notes:

1. Input bias current is not included.
2. 50% duty cycle data.
3. 622.08Mbps, PRBS2²³-1, NRZ.
4. Vcc=+3.3V.
5. Tc=25°C.
6. Input Terminal is biased internally, as shown in the figure4.
7. 20-80%.
8. Refer to Section 8, "Relation between Disable Input Voltage and Optical Output Power", for detail.

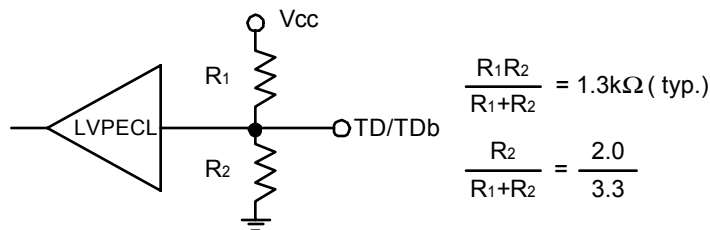


Figure 4. Internal Bias of Input Terminal

6-2. Receiver side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Supply Voltage	Vcc	3.14	3.30	3.47	V	
Supply Current	I _{drx}		75	125	mA	1
RD, RD _b Output Voltage	High	V _{doh}	Vcc-1.10	Vcc-0.86	V	2
	Low	V _{dol}	Vcc-1.86	Vcc-1.62	V	
SD Output Voltage	High	V _{soh}	Vcc-1.10	Vcc-0.86	V	
	Low	V _{sol}	Vcc-1.89	Vcc-1.65	V	
Data Rise / Fall Time	Tr / Tf			0.5	nsec.	3
SD Assert Time	Ta	2.3		100	μsec	4
SD Deassert Time	Td	2.3		100	μsec	

Notes:

1. Output current is not included. 622.08Mbps, PRBS2²³-1, NRZ.
2. Vcc=+3.3V, Tc=25°C. Output load resistance RL=50Ω to Vcc-2V for RD, RD_b.
3. 20-80%.
4. 622.08Mbps, PRBS2²³-1, NRZ.

7. Optical Interface


(Unless otherwise specified, Vcc = 3.14 to 3.47 V and all operating temperature shall apply.)

7-1. Transmitter side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Average Output Power	Po	-15.0	-11.0	-8.0	dBm	1
Extinction Ratio	Er	8.2			dB	1
Center Wavelength	λ_c	1274		1356	nm	
Spectral Width (RMS)	$\Delta\lambda$			2.5	nm	
Eye Mask for Optical Output	Refer to Figure 5					

Notes:

1. Measured at 622.08Mbps PRBS2²³-1

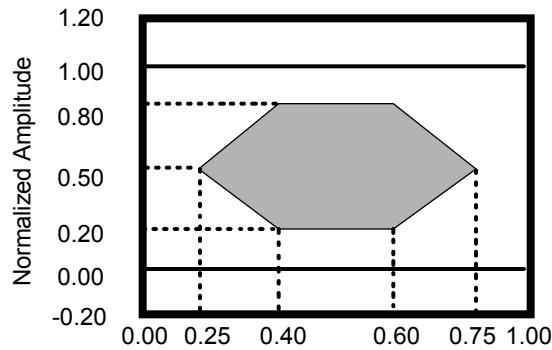

Relation between Input Signal
and Optical Output Signal

Input Signal		Optical Output Signal
TD	TDb	
High	Low	ON (High)
Low	High	OFF (Low)
High	High	Undefined
Low	Low	Undefined

Figure 5. Optical Pulse Mask with Fourth Order

Bessel-Thomson Specified in ITU-T G.957

⚠ Warning



Do not look at the laser beam projection area (e.g. end of optical connector) with naked eyes or through optical equipment while the power is supplied to this product. Otherwise, your eyes may be injured.

7-2. Receiver side

Parameter	Symbol	min.	Typ.	Max.	Unit	Note
Optical Input Wavelength	-	1260		1580	nm	
Minimum Sensitivity	Pmin		-33.0	-28.0	dBm	1, 2
Overload	Pmax	-8.0			dBm	1, 2
SD Assert Level	Pa	-45.0		-28.0	dBm	2
SD Deassert Level	Pd	-45.0		-29.0	dBm	
SD Hysteresis	Phys	1.0		6.0	dB	

Notes:


1. BER=10⁻¹⁰

2. Measured at the bit rate of 622.08Mbps, PRBS 2²³-1, NRZ

8. Relation between Disable Input Voltage and Optical Output Power

Tdis Input Voltage	Optical Output Power
"L"(0.0 ~ 0.8V)	Enabled
"H"(2.0V ~ Vcc)	Disabled (<-45dBm)
Open	Enabled

9. Recommended User Interface

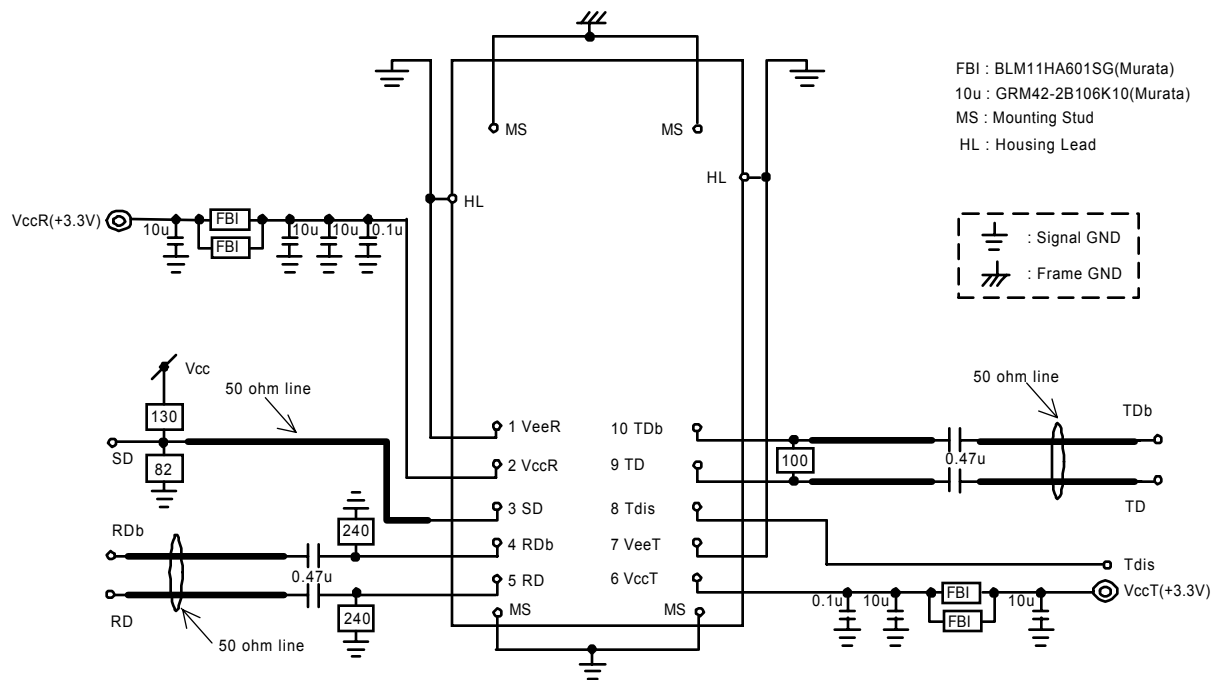

Notes:

- (1) Components on RD/RDb lines, 240Ω and 0.47u, should be placed as close as possible to module pins.
- (2) 0.1u capacitors on VccR/VccT lines should be as close as possible to module pins.
- (3) 50Ω line pattern and component placements on RD/RDb and TD/TDb lines should be symmetrical for better impedance matching.
- (4) HL is internally connected to VeeR and VeeT.

Figure 6. Recommended Interface Circuit

10. Reliability Test Program

GR-468-CORE Issue 1, December 1998 Laser Module

HEADING	TEST	REFERENCE	CONDITIONS	SAMPLING		
				LTPD	SS	C
Mechanical Integrity	Mechanical Shock	MIL-STD-883 Method 2002	5 times/axis 1,500G, 0.5ms	20	11	0
	Vibration	MIL-STD-883 Method 2007	Cond. A 20G, 20-2,000G Hz, 4min/cy, 4cy/axis	20	11	0
	Thermal Shock	MIL-STD-883 Method 1011	Delta T=100°C 0°C to 100°C	20	11	0
	Solderability	MIL-STD-883 Method 2003	(steam aging not required)	20	11	0
Endurance	Accel. Aging (High Temp.)	(R)-4-53 Section 5.18	85°C; rated power 1,000 hrs. for pass/fail 2,000, 5,000 hrs. for info.	-	25 10	-
	Low Temp. Storage	-	min. storage T 1,000 hrs. for pass/fail 2,000 hrs. for info.	20	11	0
	Temperature Cycling	Section 5.20	-40°C to +85°C 500 for pass/fail 1,000 for info.	20 -	11 11	0 -
	Damp Heat	MIL-STD-202 Method 103 or IEC-60068-2-3	85°C/85%RH 1,000hrs.	20	11	0
	Cyc. Moist. Res.	Sec. 5.23	-	20	11	0
Special Tests	Internal Moisture	MIL-STD-883 Method 1018	Max. 5,000ppm water vapour	20	11	0
	ESD Threshold	Section 5.22		-	6	-

SS : Sample Size

C : Maximum number of failure allowed to pass the test.

11. Laser Safety

This product uses a semiconductor laser system and is a laser class 1 product acceptable FDA, complies with 21CFR 1040. 10 and 1040.11. Also this product is a laser class 1 product acceptable IEC 825-1.

Class 1 Laser Product

⚠ Caution






If this product is used under conditions not recommended in the specification or this product is used with unauthorized revision, classification for laser product safety standard is invalid. Classify the product again at your responsibility and take appropriate actions.




12. Other Precaution

Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

The governmental approval is required to export this product to other countries. To dispose of these components, the appropriate procedure should be taken to prevent illegal exportation.

This module must be handled, used and disposed of according to your company's safe working practice.

 Warning	
	Be sure to carry out correct soldering for connection to peripheral circuits in order to prevent contact failure or short-circuit. Otherwise, a strong laser beam may cause eye injury, overheating or fire.
	Do not put this product or components of this product into your mouth. This product contains material harmful to health.

 Caution	
	Be sure to turn the power off when you touch this product connected to the printed circuit boards. Otherwise, electric shock may occur.
	Dispose this product or equipment including this product properly as an industrial waste according to the regulations.

13. Ordering Information

Ordering Number	Connector Type	EMI Shield Finger Option	Operating Case Temperature
SCM6202-GL-ZN	LC Duplex Receptacle, Metallized	Without Finger	-5°C ~ 70°C
SCM6202-GL-CN	LC Duplex Receptacle, Metallized	With Type-C Finger	
SCM6202-GL-ZW	LC Duplex Receptacle, Metallized	Without Finger	-40°C ~ 85°C
SCM6202-GL-CW	LC Duplex Receptacle, Metallized	With Type-C Finger	

14. For More Information

U.S.A.

ExceLight Communications, 4021 Stirrup Creek Drive, Suite 200 Durham, NC 27703

Tel. +1-919-361-1600 / Fax. +1-919-361-1619

E-mail: info@excelight.com

<http://www.excelight.com>

Europe

Sumitomo Electric Europe Ltd., 220, Centennial Park, Elstree, Herts, WD6 3SL, United Kingdom

Tel. +44-208-953-8681

Fax. +44-208-207-5950

E-mail: photonics@sumielectric.com

<http://www.sumielectric.com>

Japan

Sumitomo Electric Industries, Ltd. (International Business Division), 3-12, Moto-Akasaka 1-chome
Minato-ku Tokyo 107-8468

Tel. +81-3-3423-5771 / Fax. +81-3-3423-5099

E-mail: product-info@ppd.sei.co.jp

http://www.sei.co.jp/Electro-optic/index_e.html