

P/N S191AM-925S

Alternative Connectors

.SMA Reverse Polarity Plug(female)

P/N: S191AH-925S

.SMA Reverse Thread Plug(male)

P/N: S191AT-925S

Alternative Frequency Band 824~896 MHz

.SMA Plug(male)

P/N: S191AM-860S

.SMA Reverse Polarity Plug(female)

P/N: S191AH-860S

.SMA Reverse Thread Plug(male)

P/N: S191AT-860S

Electrical Properties:

Frequency Range: 890~960 MHz

Impedance: 50Ω nominal

VSWR: <2.0:1

Gain: 1.8 dBi

Radiation: Omni

Polarization: Vertical

Wave: Half Wave Dipole

Mechanical Properties:

Connector: SMA Plug(male)

Material:


Whip: Polyurethane(Black)

Swivel Mechanism: Polycarbonate(Black)


Connector: Brass with black chrome plating

Operation Temp.: -20°C to +65°C


Storage Temp.: -30°C to +75°C

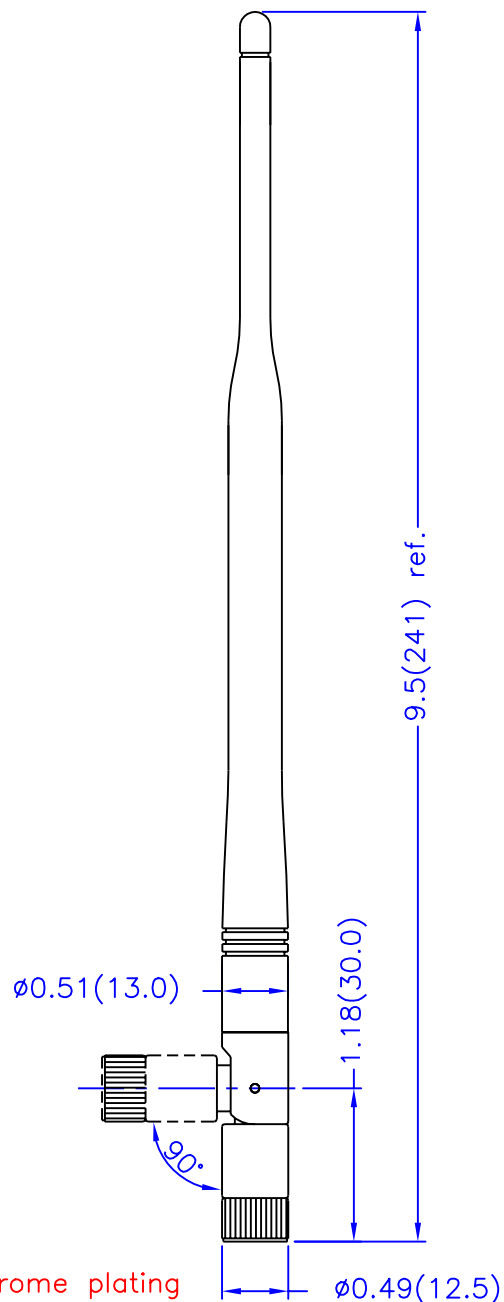

E-Plane Pattern @ 925 MHz

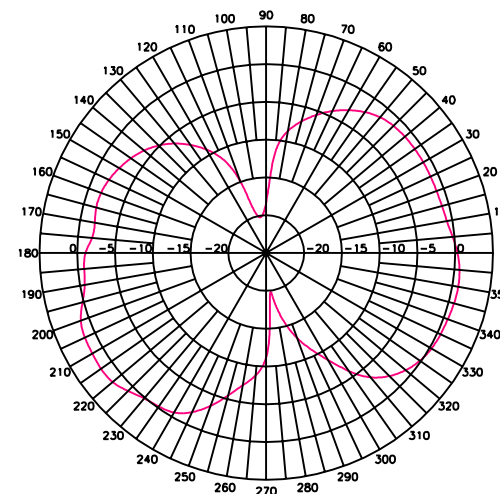

H-Plane Pattern @ 925 MHz

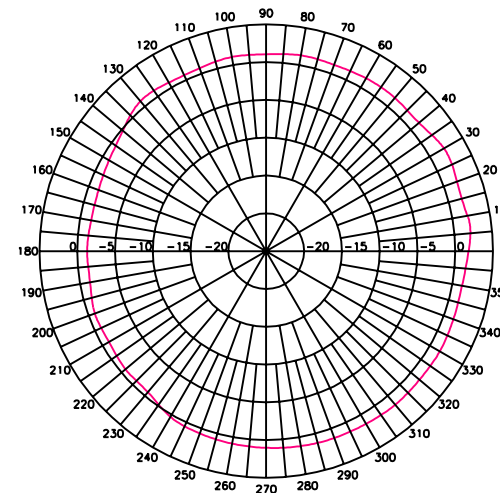

TITLE	900MHz Swivel Antenna—191 Model		VER
UNIT	DWG. NO.	S191AM—925S	
in.(mm)			
SCALE			
NONE			