

S2S6M

60V 1.3A


FEATURES

- Tj150°C
- P_{RRSM} avalanche guaranteed
- 1.0 ϕ lead

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

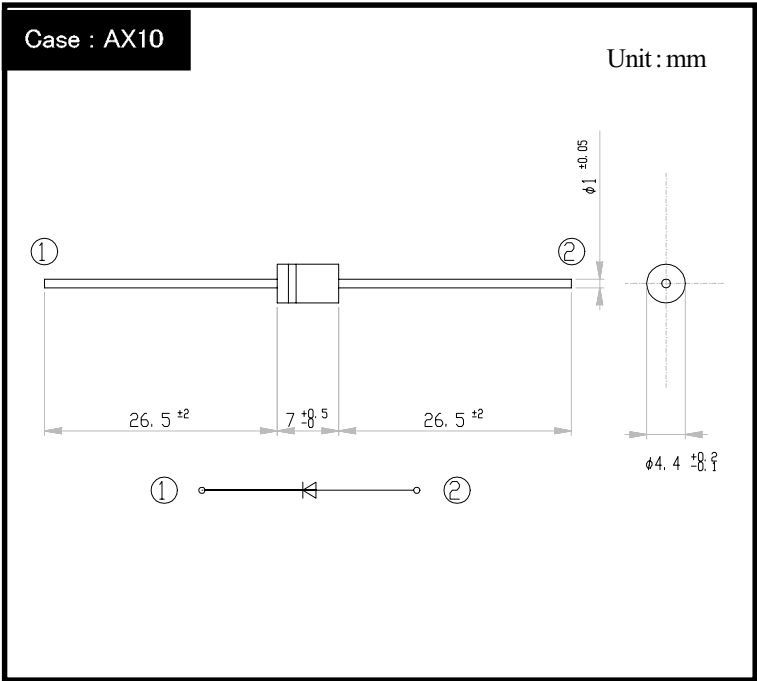

RATINGS

● Absolute Maximum Ratings (If not specified Tl=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T stg		-40~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V _{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Ta=52°C	1.3	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	60	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μ s, Tj=25°C	160	W

● Electrical Characteristics (If not specified Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =2A, Pulse measurement	Max.0.58	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.2	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V	Typ.120	pF
Thermal Resistance	θ _{jl}	junction to lead	Max.8	°C/W
	θ _{ja}	junction to ambient	Max.86	


S2S6M

Forward Voltage

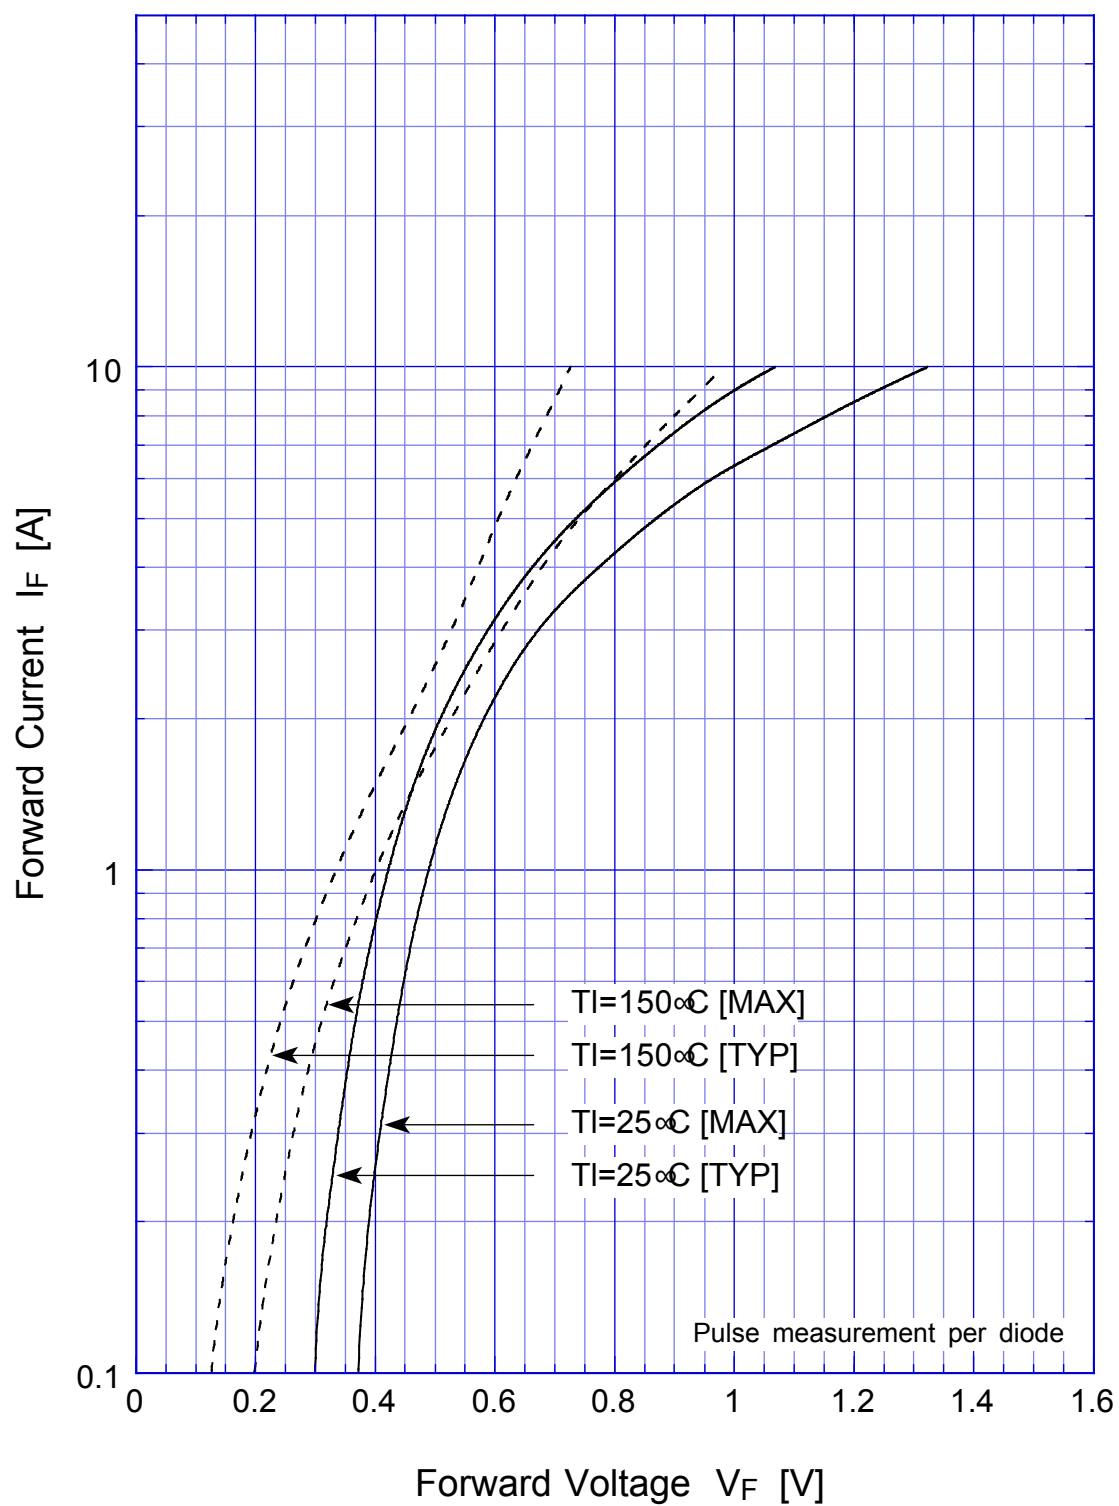

S2S6M


Junction Capacitance

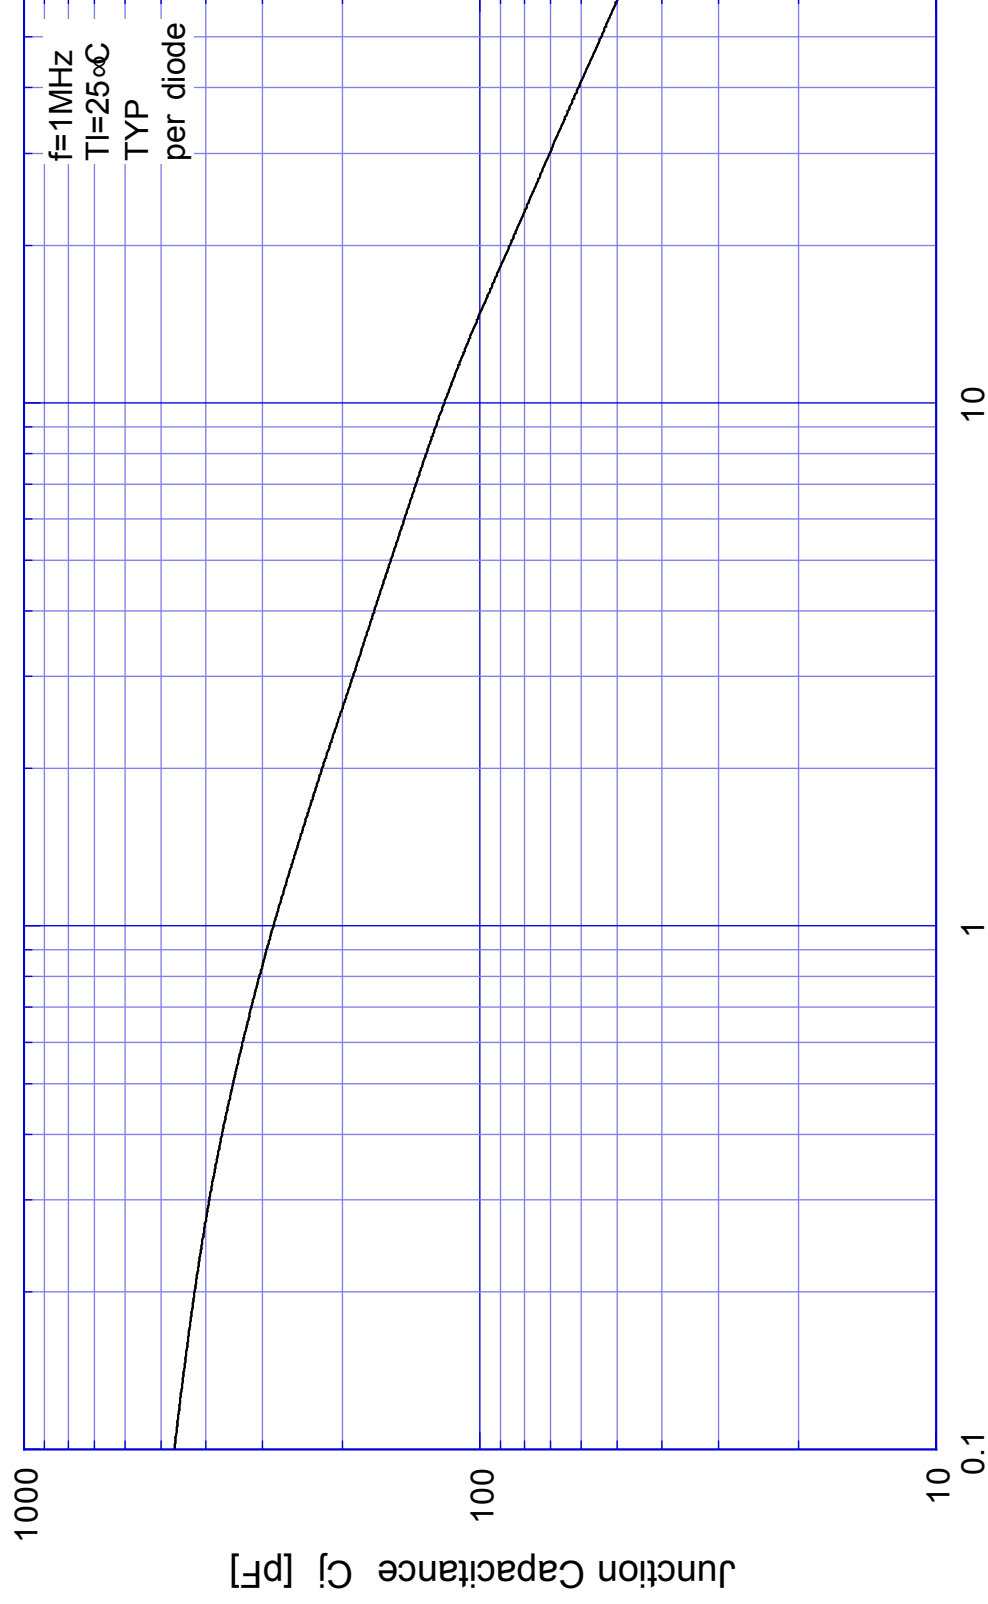

Reverse Voltage V_R [V]


S2S6M

Reverse Current

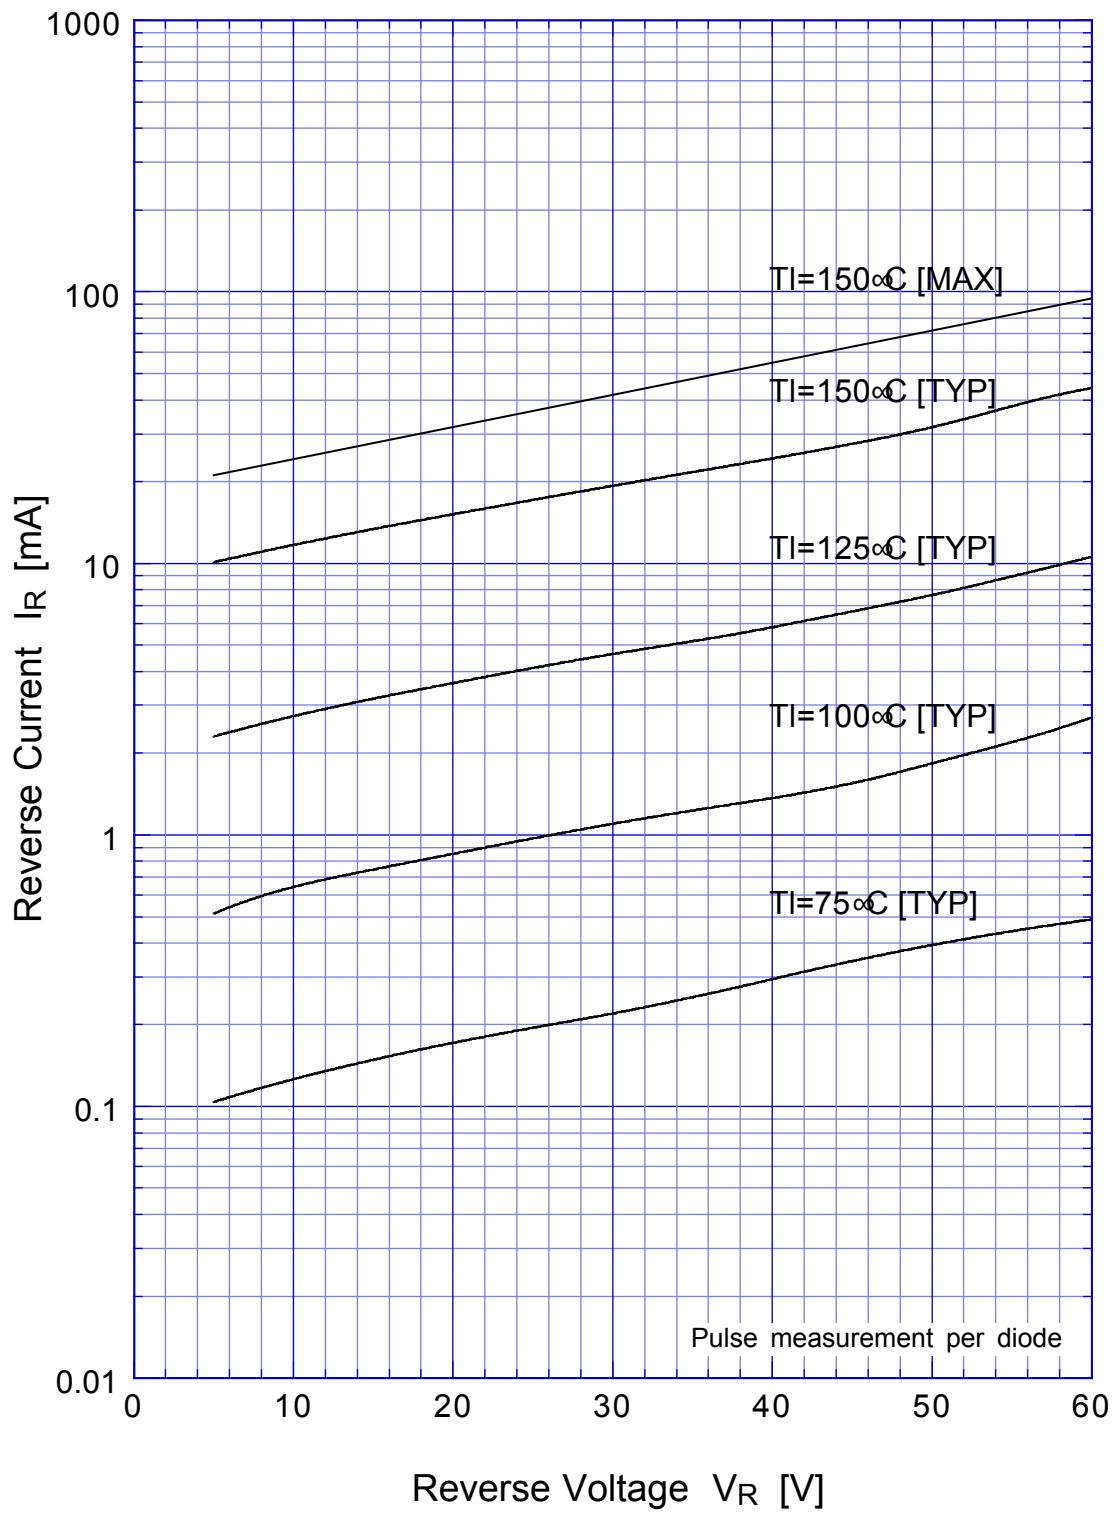


S2S6M

Reverse Power Dissipation

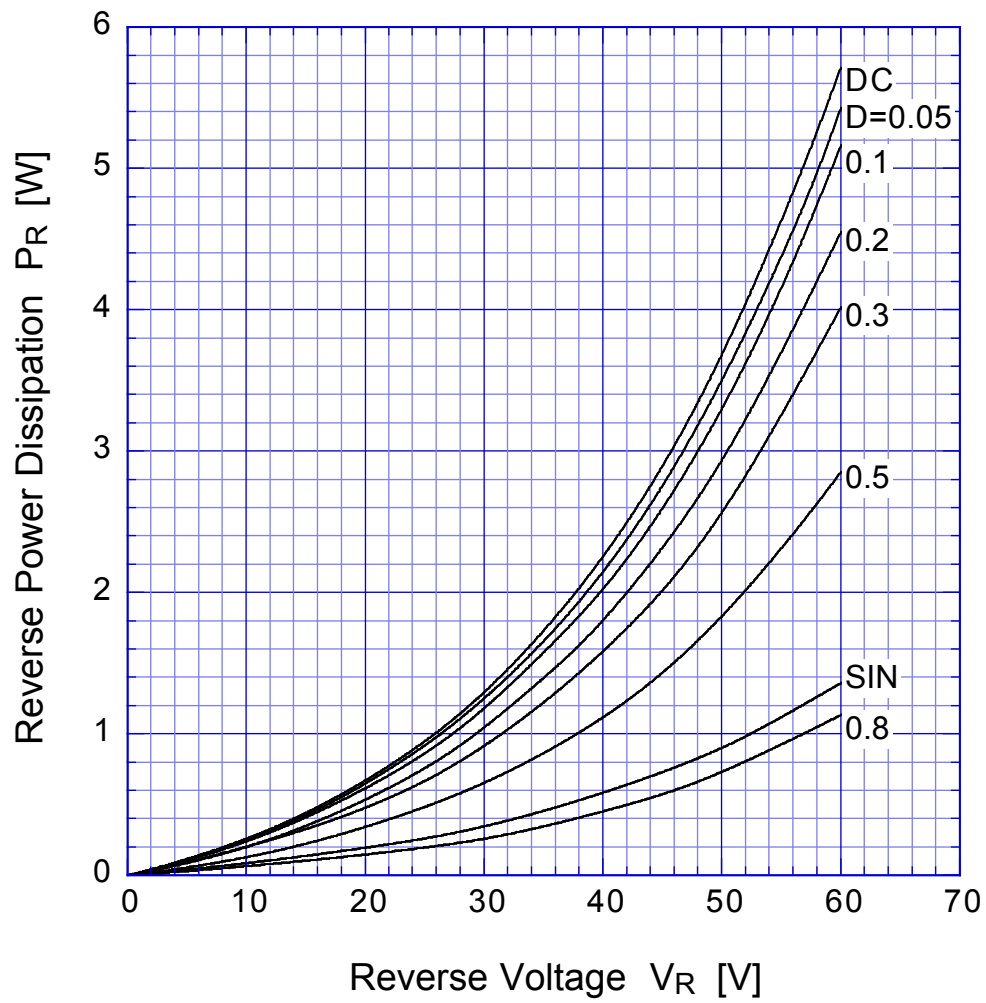


$T_j = 150^\circ\text{C}$

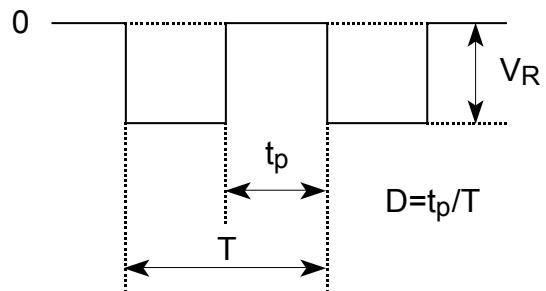

S2S6M

Forward Power Dissipation

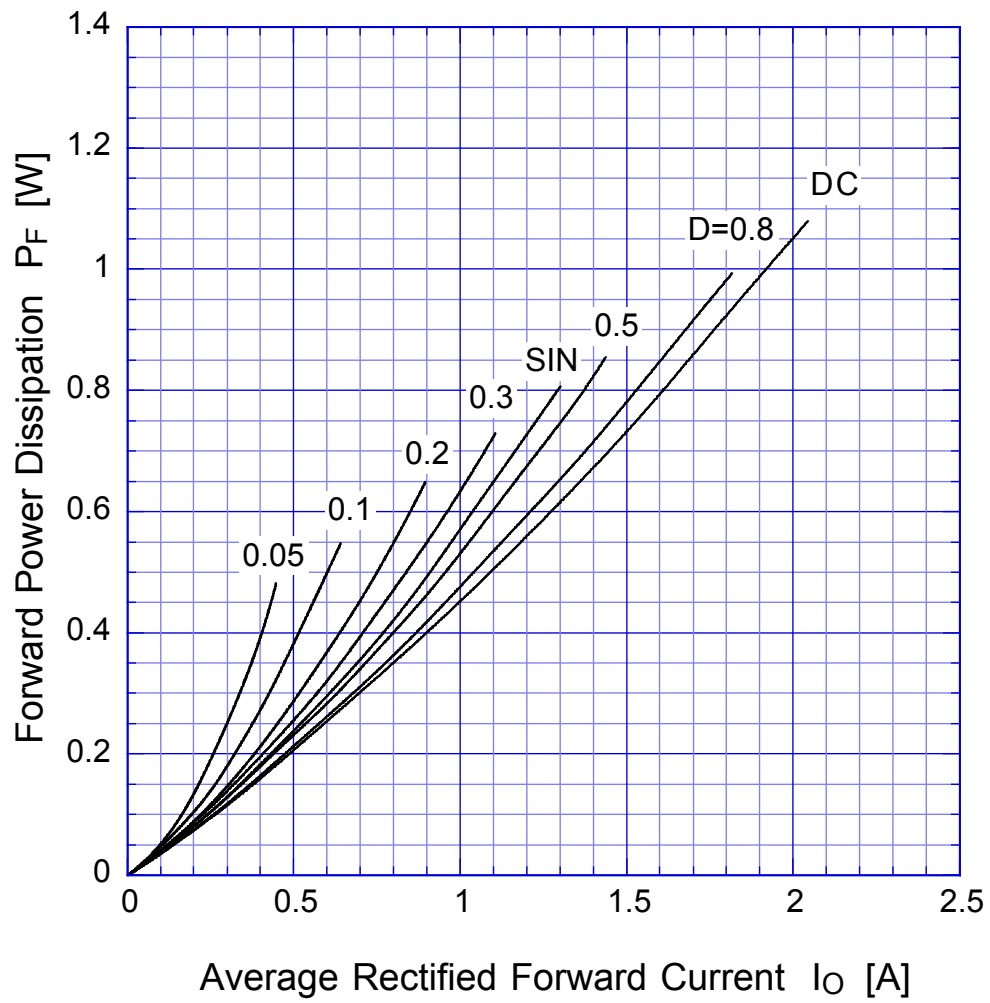


$T_j = 150^\circ\text{C}$




S2S6M

Derating Curve

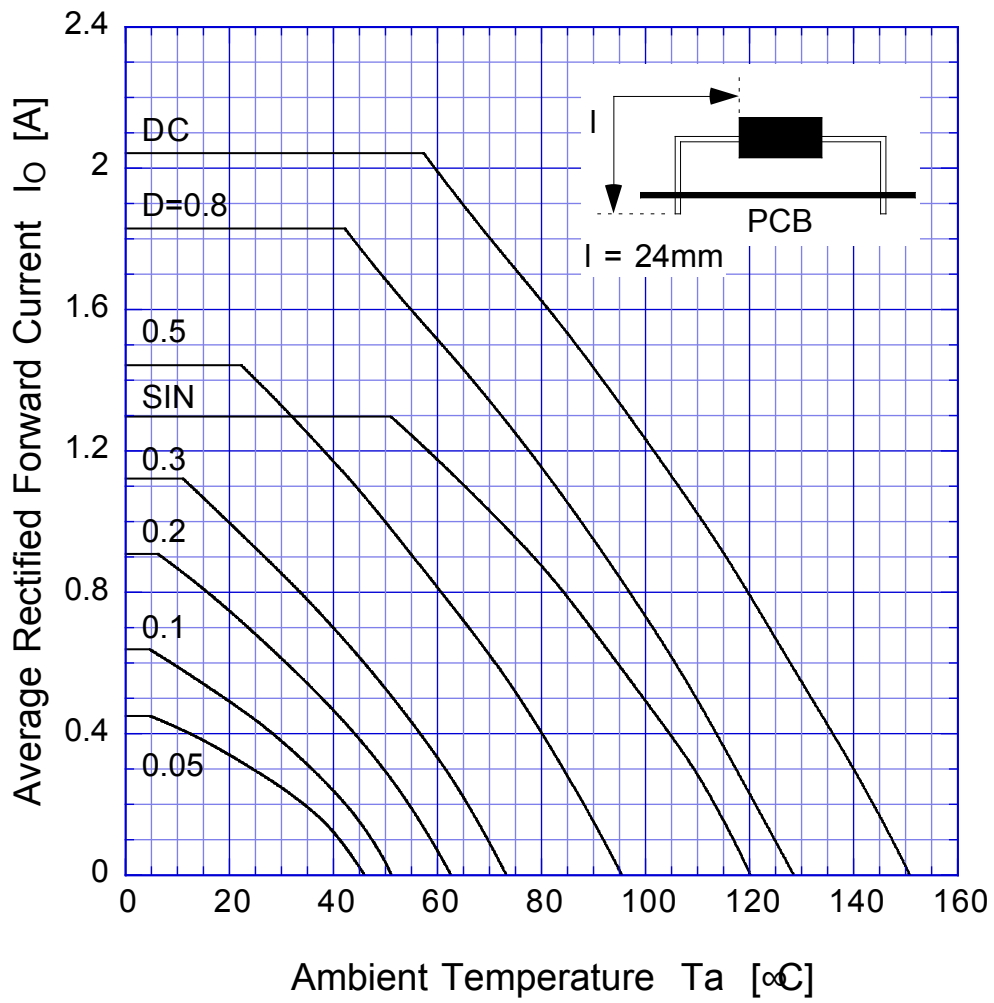


$V_R = 30\text{V}$

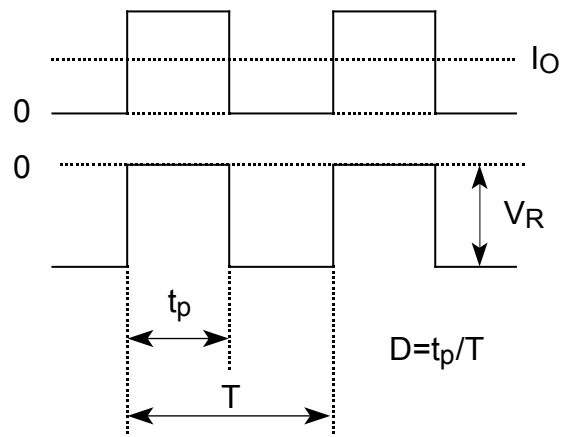

S2S6M

Peak Surge Forward Capability

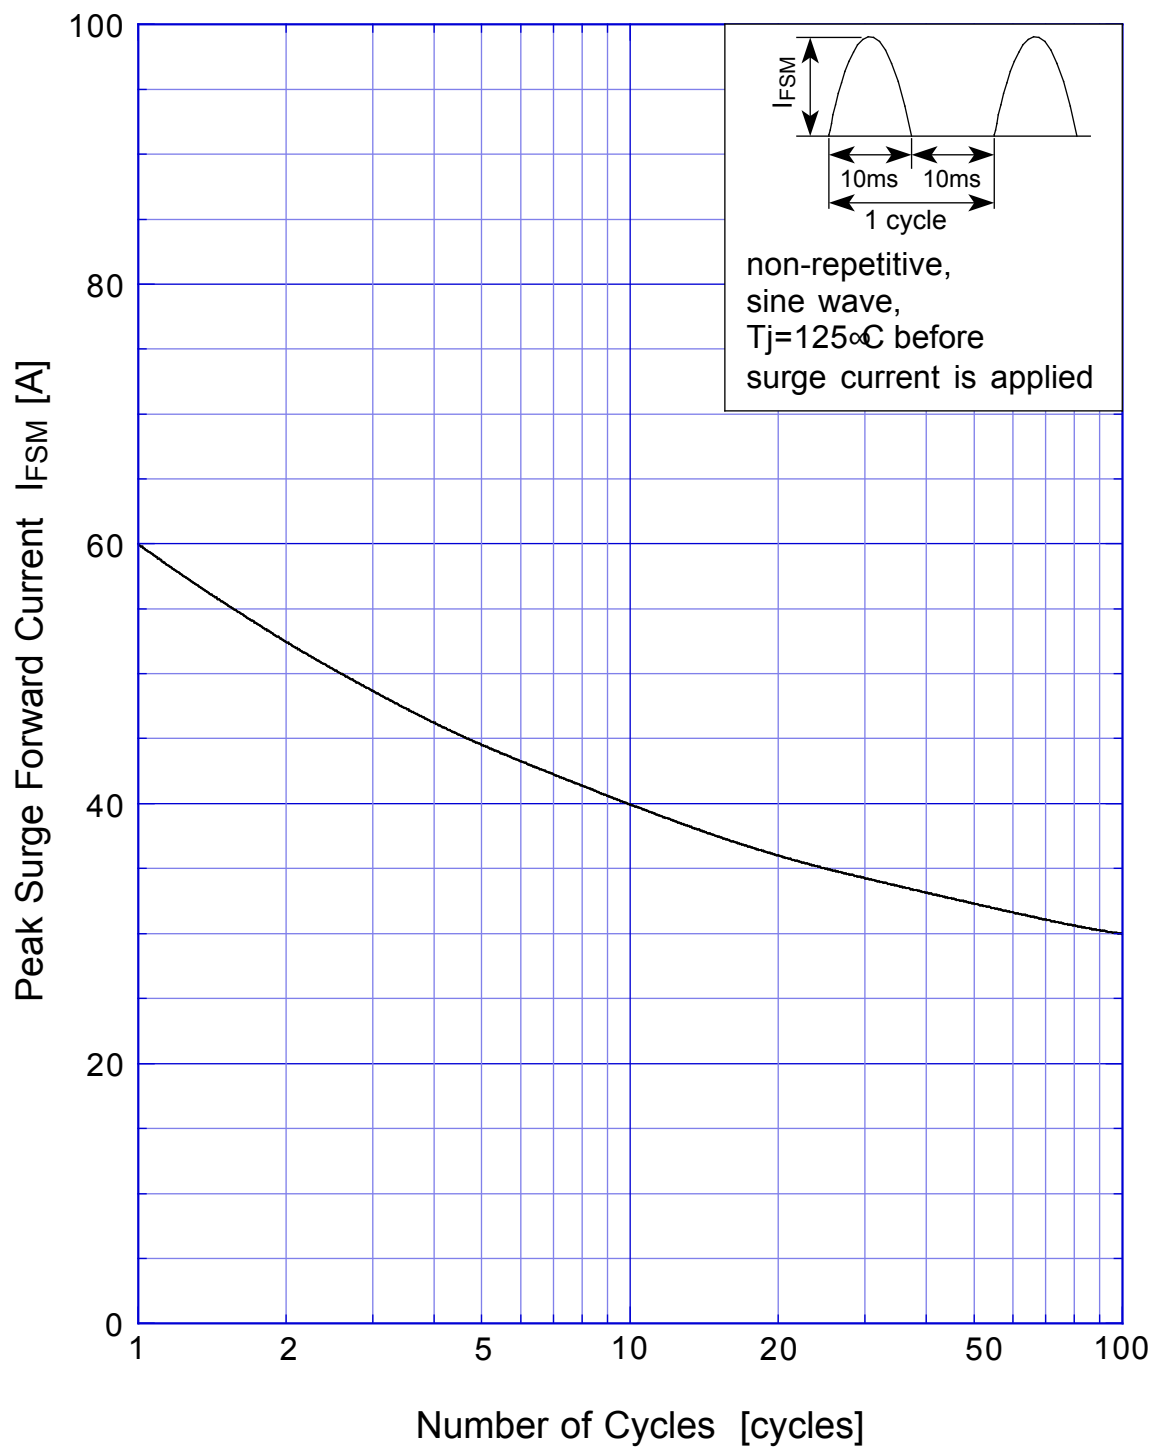

SBD Repetitive Surge Reverse Power Derating Curve



