

SF8L60

600V 8A

FEATURES

- High Voltage
- trr70ns
- Fully Isolated Molding
- Dielectric strength 2kV guaranteed


APPLICATION

- PFC
- Switching power supply
- Free Wheel
- CTV+B output, lighting

OUTLINE DIMENSIONS

Case : FTO-220

(Unit : mm)

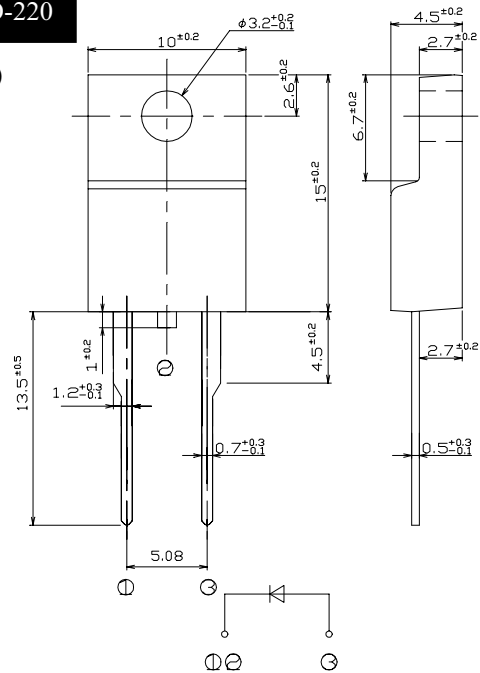

RATINGS

- Absolute Maximum Ratings (If not specified T_c=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, T _c =118°C	8	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25°C	170	A
Dielectric Strength	V _{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque: 0.3N·m)	0.5	N·m

- Electrical Characteristics (If not specified T_c=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=8A$, Pulse measurement	Max.1.5	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.25	μA
Reverse Recovery Time	t_{rr}	$I_F=0.5A$, $I_R=1A$	Max.70	ns
Thermal Resistance	θ_{jc}	junction to case	Max.2.5	$^{\circ}C/W$


SF8L60

Forward Voltage

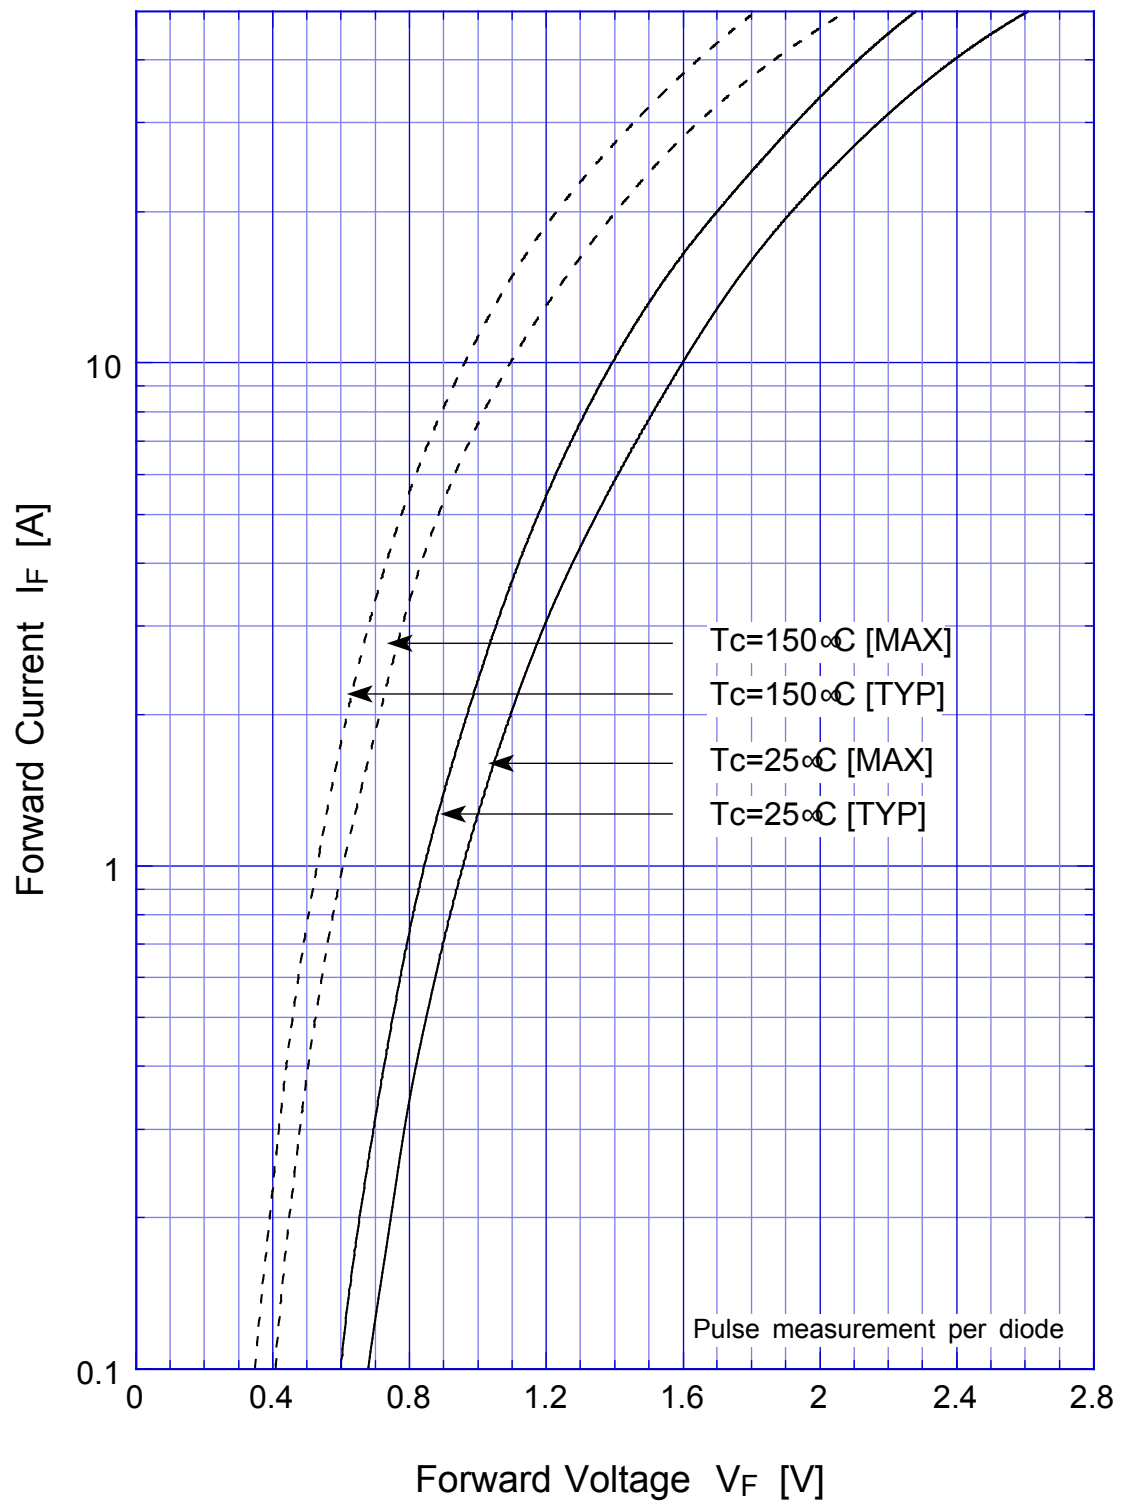


SF8L60

Forward Power Dissipation

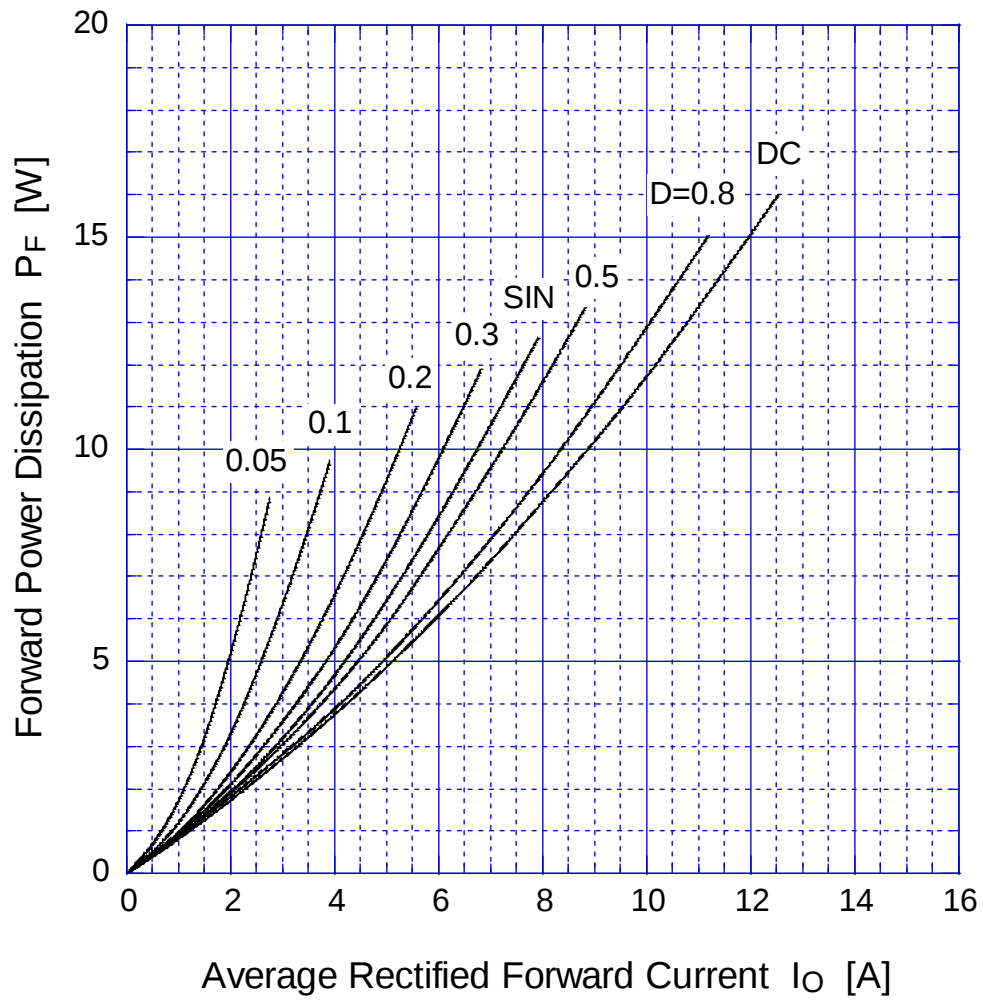


$T_j = 150^\circ\text{C}$

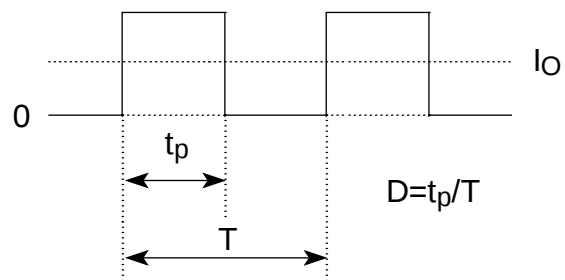


SF8L60

Derating Curve

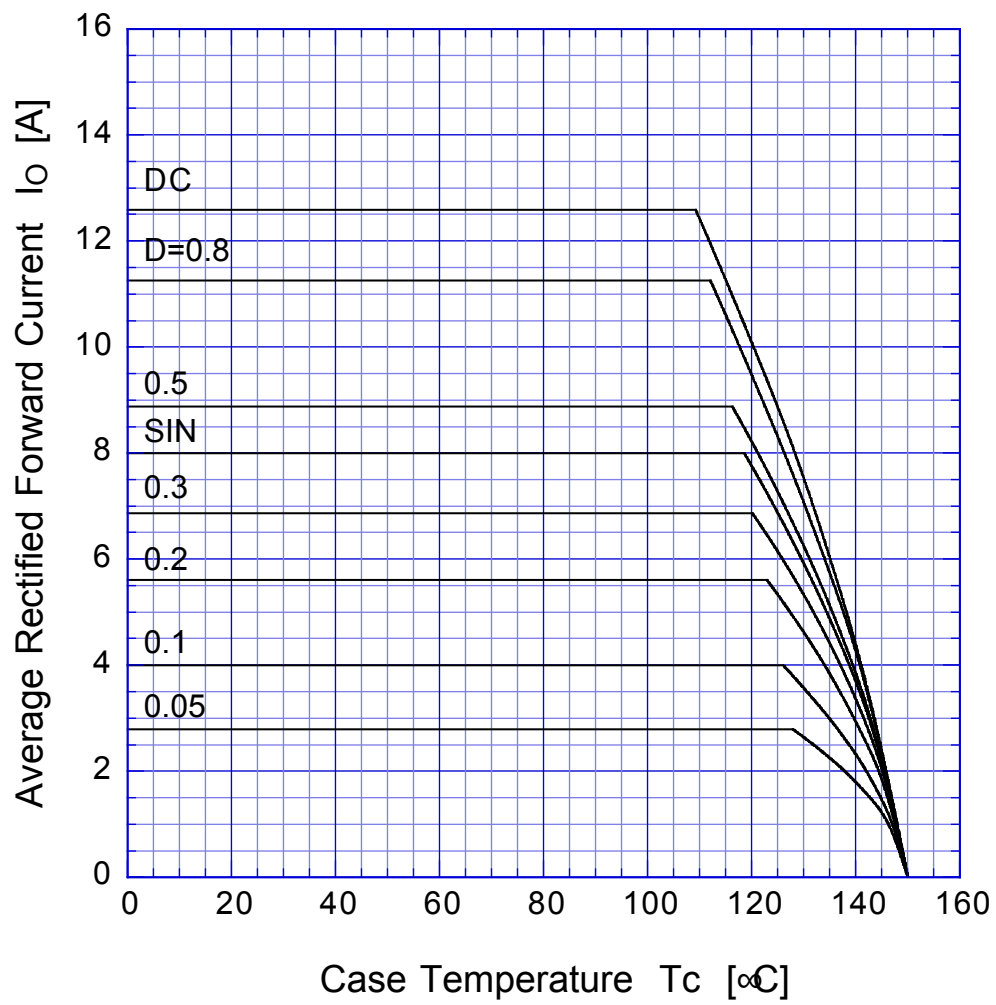


$$V_R = V_{RM}$$

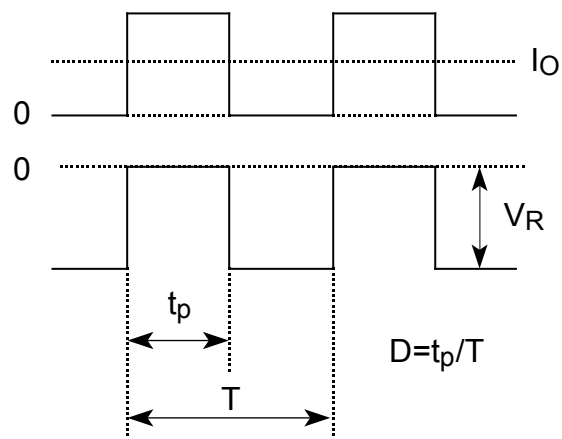

SF8L60

Peak Surge Forward Capability

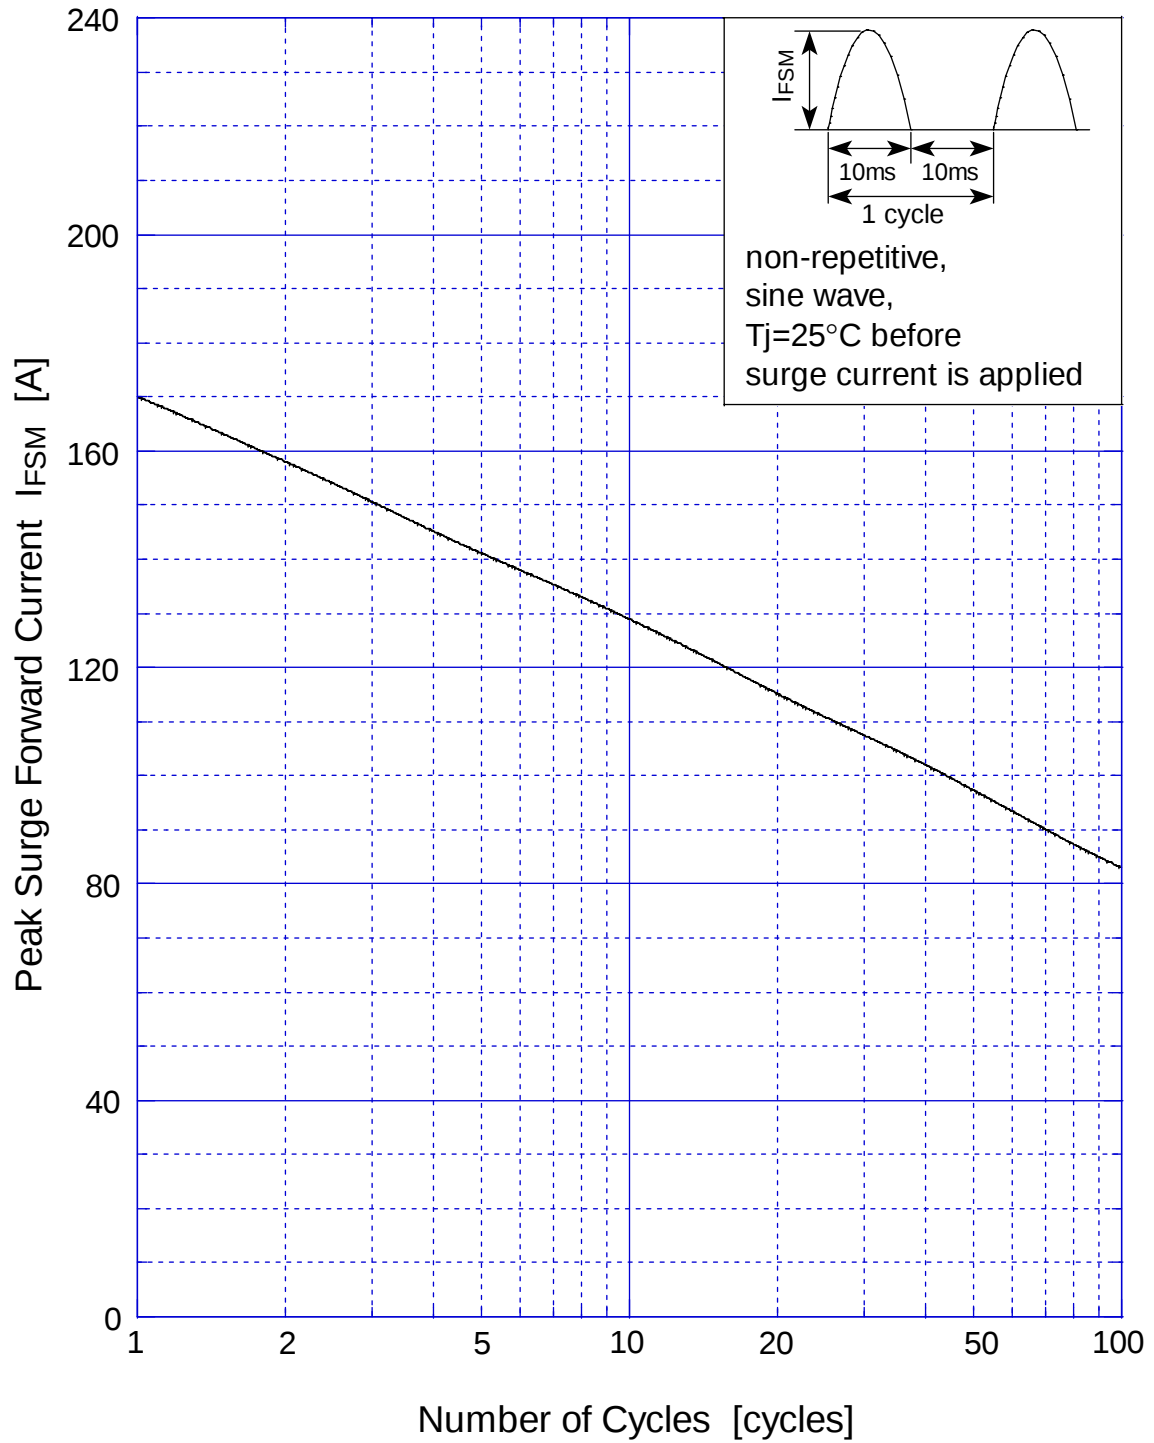

SF8L60 Junction Capacitance

