



SBL25LxxCT, SBLF25LxxCT & SBLB25LxxCT Series

Dual Low V_F Schottky Rectifier


Reverse Voltage 20 to 30V
Forward Current 25A

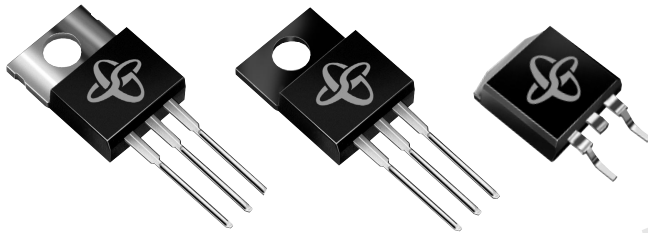

TO-220AB (SBL25LxxCT)

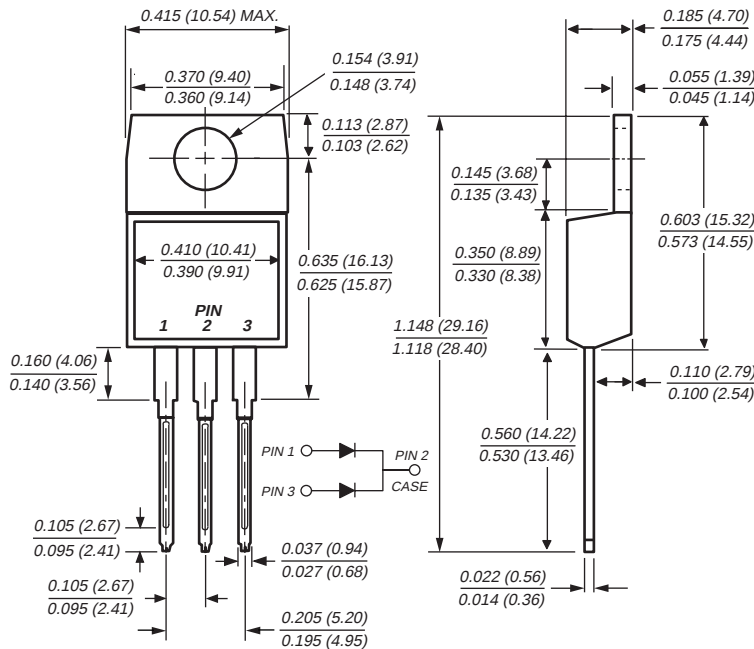


Mounting Pad Layout TO-263AB

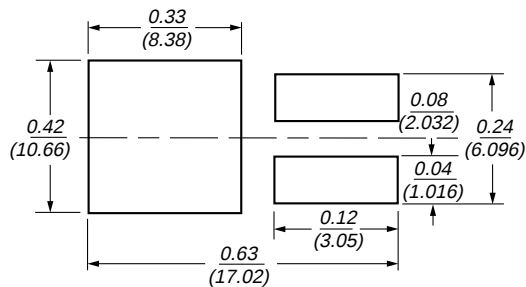


Dimensions in inches and (millimeters)

ITO-220AB (SBLF25LxxCT)

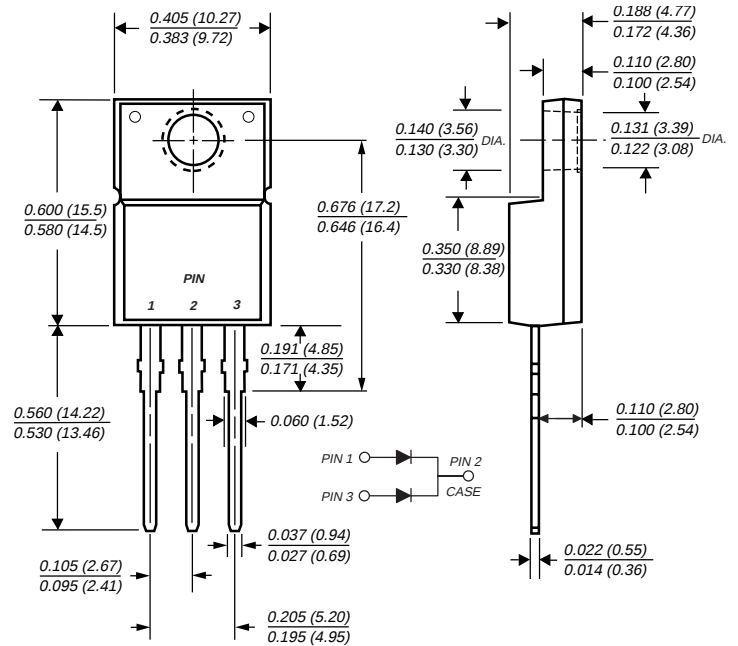

TO-263AB (SBLB25LxxCT)

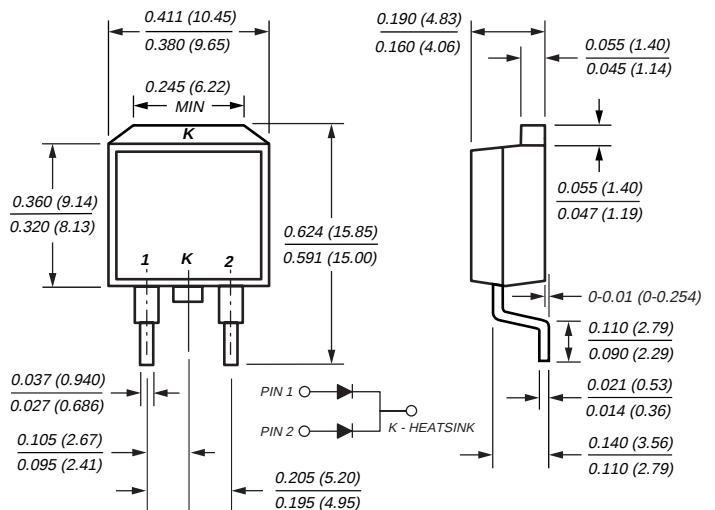

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 ounce, 2.24 grams

SBL25LxxCT, SBLF25LxxCT & SBLB25LxxCT Series

Dual Low V_F Schottky Rectifier

Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBL25L20CT	SBL25L25CT	SBL25L30CT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	20	25	30	V
Working peak reverse voltage	V_{RWM}	14	17	21	V
Maximum DC blocking voltage	V_{DC}	20	25	30	V
Maximum average forward rectified current at $T_C = 95^\circ\text{C}$ <i>Total device per leg</i>	$I_{F(AV)}$	25 12.5			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I_{FSM}	180			A
Operating junction and storage temperature range	T_J, T_{STG}	-40 to +125			$^\circ\text{C}$
RMS Isolation voltage (SBLF type only) from terminals to heatsink with $t = 1.0$ second, $RH \leq 30\%$	V_{ISOL}	4500 (NOTE 1) 3500 (NOTE 2) 1500 (NOTE 3)			V

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum instantaneous forward voltage per leg at 12.5A (NOTE 4) $T_C = 125^\circ\text{C}$ $T_C = 25^\circ\text{C}$	V_F	0.39 0.49	V
Maximum instantaneous reverse current at rated DC blocking voltage per leg (NOTE 4) $T_C = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$ $T_C = 125^\circ\text{C}$	I_R	0.90 50 100	mA

Thermal Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBL	SBLF	SBLB	Unit
Typical thermal resistance from junction to case per leg	$R_{\theta JC}$	1.5	4.0	1.5	$^\circ\text{C/W}$

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300 μs pulse width, 1% duty cycle

SBL25LxxCT, SBLF25LxxCT & SBLB25LxxCT Series

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

