


### Technical Data

### S1800 / S1803 / S1850 Series

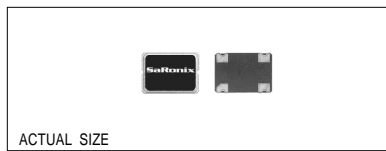


#### Description

The 5V S1800, S1850 and 3.3V S1803 are crystal-controlled, low-current oscillators providing precise rise and fall times to drive high speed CMOS and TTL loads. The sub-miniature, very low profile leadless ceramic packages have gold-plated contact pads, ideal for today's pick-and-place SMT environments. The S1850 is a high output load version available to 80 MHz.

#### Applications & Features

- Sub-miniature, 1.1 mm high ceramic package ideal for SMT applications
- 10 $\mu$ A max standby mode on S1800 and S1803
- Available as 3.3V and 5V versions
- CMOS, HCMOS & TTL compatible
- Perfect for PC's; notebook, palmtop computers; portable applications; PCMCIA cards; disc drives. Anywhere small size, low power, surface mountability are a priority
- Available on tape & reel; 16mm tape, 1000pcs per reel

#### Solder Reflow Guide

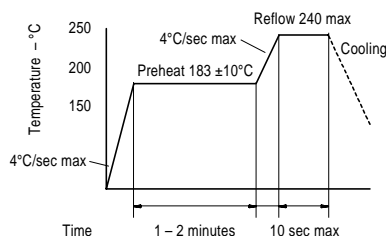

<b>Frequency Range:</b>	1.5440 MHz to 80 MHz		
<b>Frequency Stability:</b>	$\pm$ 25*, $\pm$ 50 or $\pm$ 100 ppm over all conditions; calibration, tolerance, operating temperature, input voltage change, load change, aging (1 Year @ 25°C average ambient temperature), shock and vibration.		
<b>Temperature Range:</b>	Operating: -10 to +70°C, -40 to +85°C (on S1803 certain frequencies only) Storage: -55 to +125°C		
<b>Supply Voltage:</b>	+5.0V $\pm$ 10%, 3.3V $\pm$ 10%		
<b>Supply Current:</b>		S1800	S1803
1.544 to 32 MHz:	25mA max	15mA max	27mA max
32+ to 50 MHz:	35mA max	18mA max	35mA max
50+ to 80 MHz:		25mA max	75mA max
1.544 to 50 MHz (standby):	10 $\mu$ A max		
1.544 to 80 MHz (standby):		10 $\mu$ A max	
<b>Standby Current:</b>	10 $\mu$ A max on S1800 and S1803 only		
<b>Output:</b>	Symmetry: 45/55% max @ 50% VDD, 40/60% max @ 1.5V on S1800 & 1850 Rise & Fall Times: 7ns max (10ns max: S1800) 20% to 80% VDD, 1.544 to 50 MHz 5ns max, 50+ to 80 MHz (S1803 & S1850 only) Logic 0: 10% VDD max Logic 1: 90% VDD min Load: S1800/S1803: 15 pF max, 10 LSTTL S1850: 50 pF max 1.544 to 50 MHz, 10 TTL 30 pF max 50+ to 70 MHz, 10 TTL 20 pF max 70+ to 80 MHz (HCMOS), 10 TTL Jitter: 8ps max RMS period jitter		
<b>Mechanical:</b>	Shock: MIL-STD-883, Method 2002, Condition B Solderability: MIL-STD-883, Method 2003 Vibration: MIL-STD-883, Method 2007, Condition A Solvent Resistance: MIL-STD-202, Method 215 Terminal Strength: MIL-STD-883, Method 2004, Condition D Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J		
<b>Environmental:</b>	Gross Leak Test: MIL-STD-883, Method 1014, Condition C Fine Leak Test: MIL-STD-883, Method 1014, Condition A2 Thermal Shock: MIL-STD-883, Method 1011, Condition A Moisture Resistance: MIL-STD-883, Method 1004		

#### Part Numbering Guide

Saronix	S	1803	C	-	60.0000	(T)	(T) = Tape & Reel full reel increments only
<b>Series</b>							<b>Frequency (MHz)</b>
S1800 = 5.0V, 1.544 to 50 MHz, 15 pF, standby							<b>Stability Tolerance</b>
S1803 = 3.3V, 1.544 to 80 MHz, 15 pF, standby							*A = $\pm$ 25 ppm, -10 to +70°C
S1850 = 5.0V, 1.544 to 80 MHz, 50 pF high drive							B = $\pm$ 50 ppm, -10 to +70°C
							C = $\pm$ 100 ppm, -10 to +70°C
							*E = $\pm$ 50 ppm, -40 to +85°C
							*F = $\pm$ 100 ppm, -40 to +85°C

\*Stability "A" on S1800, S1803, S1850 and stability "E", "F" on S1803 are available at certain frequencies only. Please contact SaRonix.

DS-181 REV F

### Technical Data


### S1800 / S1803 / S1850 Series

#### Tri-State Logic Table


Pad 1 Input	Pad 3 Output
Logic 1 or NC	Oscillation
Logic 0 or GND	High Impedance

Required Input Levels on Pad 1:  
 Logic 1 = 2.2V min  
 Logic 0 = 0.8V max

#### Package Details

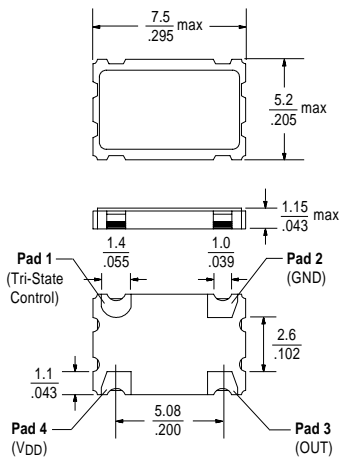


#### Marking Format\*



\*Exact location of items may vary


#### Recommended Land Pattern



\*\*External high frequency power supply decoupling required.


Scale: None (Dimensions in  $\frac{\text{mm}}{\text{inches}}$ )

#### Test Circuit

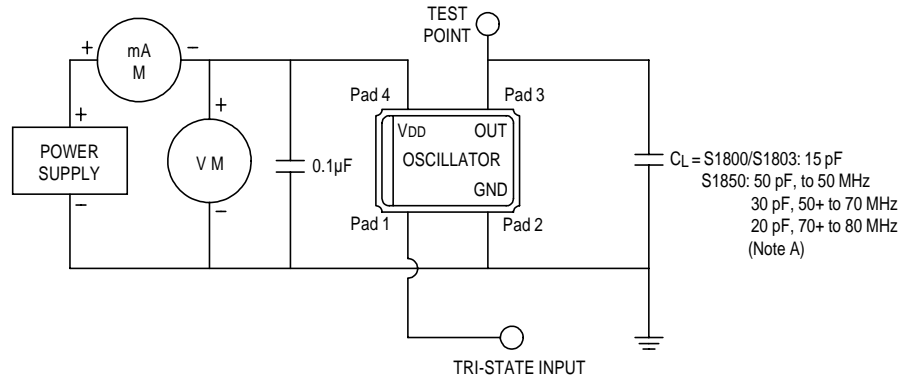

Note A: CL includes probe and fixture capacitance

#### Output Waveform

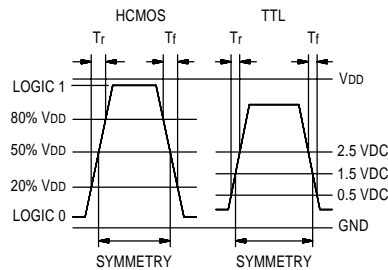

All specifications are subject to change without notice.

DS-181 REV F