

TLP331, TLP332

OFFICE MACHINE
HOUSEHOLD USE EQUIPMENT
PROGRAMMABLE CONTROLLERS
AC/DC-INPUT MODULE
TELECOMMUNICATION

The TOSHIBA TLP331 and TLP332 consists of a gallium arsenide infrared emitting diode optically coupled to a photo-transistor in a six lead plastic DIP package.

This photocoupler provides the unique feature of high current transfer ratio at both low output voltage and low input current. This makes it ideal for use in low power logic circuits, telecommunications equipment and portable electronics isolation applications.


TLP332 is no-base internal connection for high-EMI environments.

- Collector-Emitter Voltage : 55V (Min.)
- Isolation Voltage : 5000Vrms (Min.)
- UL Recognized : UL1577, File No. E67349
- Current Transfer Ratio

CLASSI-FICATION (*)	CURRENT TRANSFER RATIO (Min.)			MARKING OF CLASSI-FICATION
	Ta = 25°C		Ta = -25~75°C	
	IF=1mA VCE=0.5V	IF=0.5mA VCE=1.5V	IF=1mA VCE=0.5V	
Rank BV	200%	100%	100%	BV
Standard	100%	50%	50%	BV, Blank


(*) Ex. Standard : TLP331
Rank BV : TLP331 (BV)

(Note) Application type name for certification test,
please use standard product type name, i.e.
TLP331 (BV) : TLP331

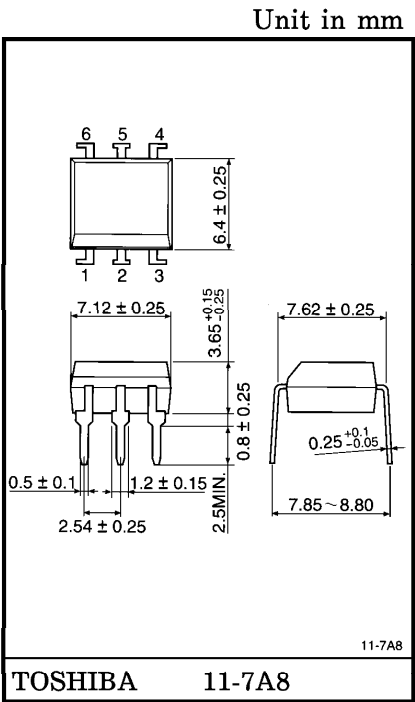

Weight : 0.4g

PIN CONFIGURATIONS (TOP VIEW)

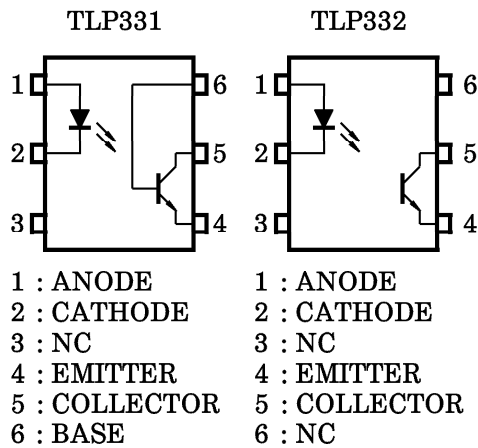

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	I _F	60	mA
	Forward Current Derating (Ta ≥ 39°C)	ΔI _F / °C	−0.7	mA / °C
	Peak Forward Current (100 μs pulse, 100pps)	I _{FP}	1	A
	Reverse Voltage	V _R	5	V
	Junction Temperature	T _j	125	°C
DETECTOR	Collector-Emitter Voltage	V _{CEO}	55	V
	Collector-Base Voltage (TLP331)	V _{CBO}	80	V
	Emitter-Collector Voltage	V _{ECO}	7	V
	Emitter-Base Voltage (TLP331)	V _{EBO}	7	V
	Collector Current	I _C	50	mA
	Power Dissipation	P _C	150	mW
	Power Dissipation Derating (Ta ≥ 25°C)	ΔP _C / °C	−1.5	mW / °C
	Junction Temperature	T _j	125	°C
Storage Temperature Range		T _{stg}	−55~125	°C
Operating Temperature Range		T _{opr}	−55~100	°C
Lead Soldering Temperature (10s)		T _{sol}	260	°C
Total Package Power Dissipation		P _T	250	mW
Total Package Power Dissipation Derating (Ta ≥ 25°C)		P _T / °C	−2.5	mW / °C
Isolation Voltage (AC, 1 min., RH ≤ 60%) (Note 1)		BV _S	5000	V _{rms}

(Note 1) Device considered a two terminal device : Pins 1, 2 and 3 shorted together and pins 4, 5 and 6 shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{CC}	—	5	25	V
Forward Current	I _F	—	1.6	25	mA
Collector Current	I _C	—	1	10	mA
Operating Temperature	T _{opr}	−25	—	75	°C

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R = 5\text{V}$	—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 0.5\text{mA}$	55	—	—	V
	Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	$I_E = 0.1\text{mA}$	7	—	—	V
	Collector-Base Breakdown Voltage (TLP331)	$V_{(BR)CBO}$	$I_C = 0.1\text{mA}$	80	—	—	V
	Emitter-Base Breakdown Voltage (TLP331)	$V_{(BR)EBO}$	$I_E = 0.1\text{mA}$	7	—	—	V
	Collector Dark Current	I_{CEO}	$V_{CE} = 24\text{V}$	—	10	100	nA
			$V_{CE} = 24\text{V}, T_a = 85^\circ\text{C}$	—	2	50	μA
	Collector Dark Current (TLP331)	I_{CER}	$V_{CE} = 24\text{V}, T_a = 85^\circ\text{C}$ $R_{BE} = 1\text{M}\Omega$	—	0.5	10	μA
	Collector Dark Current (TLP331)	I_{CBO}	$V_{CB} = 10\text{V}$	—	0.1	—	nA
	DC Forward Current Gain (TLP331)	h_{FE}	$V_{CE} = 5\text{V}, I_C = 0.5\text{mA}$	—	1000	—	—
	Capacitance (Collector to Emitter)	C_{CE}	$V = 0, f = 1\text{MHz}$	—	12	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Current Transfer Ratio	I_C / I_F	$I_F = 1\text{mA}, V_{CE} = 0.5\text{V}$ Rank BV	100	—	1200	%
			200	—	1200	
Low Input CTR	$I_C / I_F (\text{low})$	$I_F = 0.5\text{mA}, V_{CE} = 1.5\text{V}$ Rank BV	50	—	—	%
			100	—	—	
Base Photo-current (TLP331)	I_{PB}	$I_F = 1\text{mA}, V_{CB} = 5\text{V}$	—	10	—	μA
Collector-Emitter Saturation Voltage	$V_{CE} (\text{sat})$	$I_C = 0.5\text{mA}, I_F = 1\text{mA}$	—	—	0.4	V
		$I_C = 1\text{mA}, I_F = 1\text{mA}$ Rank BV	—	0.2	—	
			—	—	0.4	

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25~75°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Current Transfer Ratio	I_C / I_F	$I_F = 1\text{mA}, V_{CE} = 0.5\text{V}$ Rank BV	50	—	—	%
			100	—	—	
Low Input CTR	$I_C / I_F (\text{low})$	$I_F = 0.5\text{mA}, V_{CE} = 1.5\text{V}$ Rank BV	—	50	—	%
			—	100	—	


ISOLATION CHARACTERISTICS (Ta = 25°C)







CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance (Input to Output)	CS	VS=0, f=1MHz	—	0.8	—	pF
Isolation Resistance	RS	V=500V	5×10 ¹⁰	10 ¹⁴	—	Ω
Isolation Voltage	BVS	AC, 1 minute	5000	—	—	Vrms
		AC, 1 second, in oil	—	10000	—	
		DC, 1 minute, in oil	—	10000	—	Vdc





SWITCHING CHARACTERISTICS (Ta = 25°C)



CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Rise Time	tr	VCC=10V IC=2mA RL=100Ω	—	8	—	μs
Fall Time	tf		—	8	—	
Turn-on Time	ton		—	10	—	
Turn-off Time	toff		—	8	—	
Turn-on Time	tON	RL=4.7kΩ (Fig.1)	—	10	—	μs
Storage Time	tS	RBE=OPEN	—	50	—	
Turn-off Time	tOFF	VCC=5V, IF=1.6mA	—	300	—	
Turn-on Time	tON	RL=4.7kΩ (Fig.1)	—	12	—	μs
Storage Time	tS	RBE=470kΩ (TLP331)	—	30	—	
Turn-off Time	tOFF	VCC=5V, IF=1.6mA	—	100	—	

Fig.1 SWITCHING TIME TEST CIRCUIT

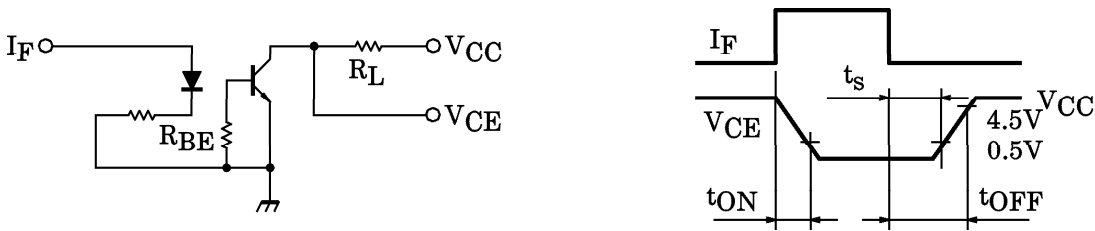

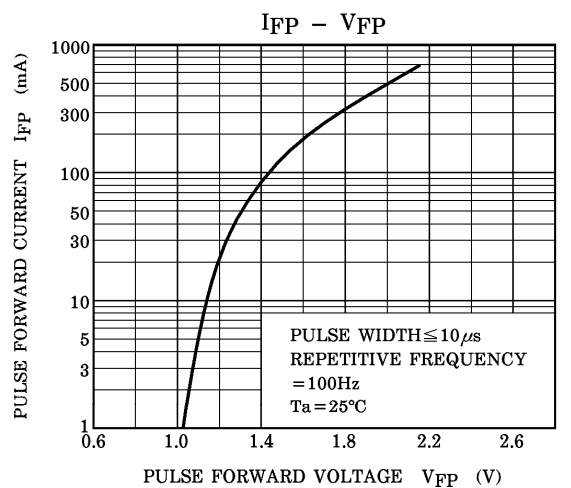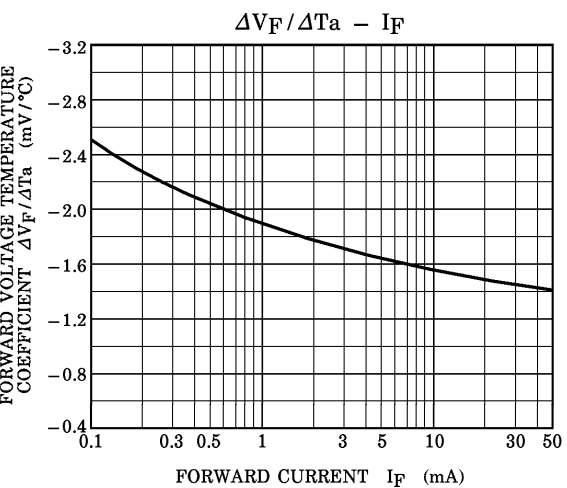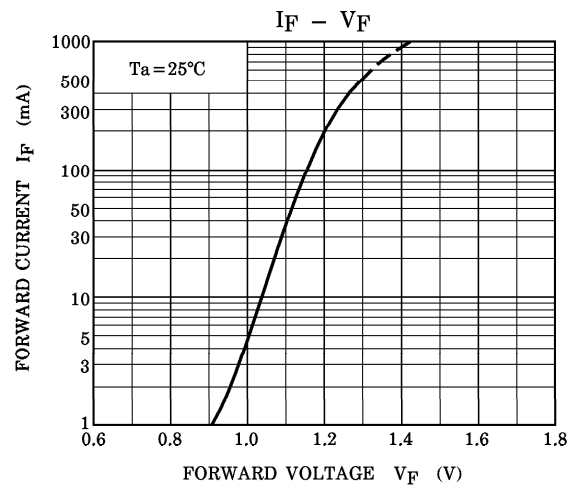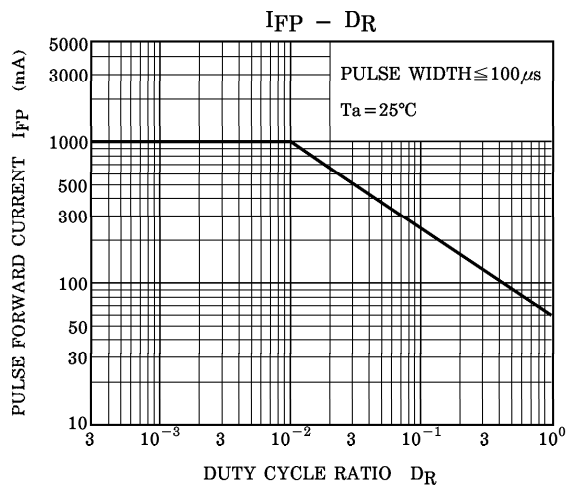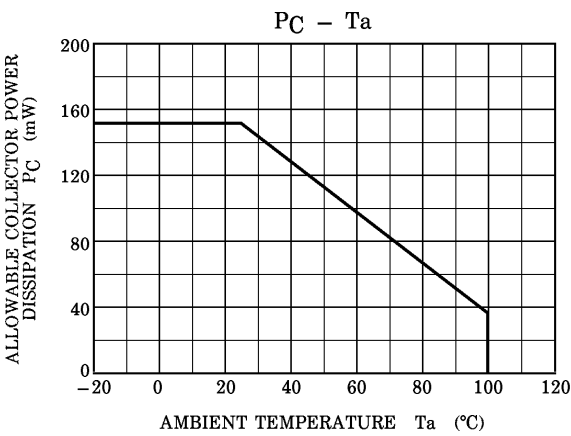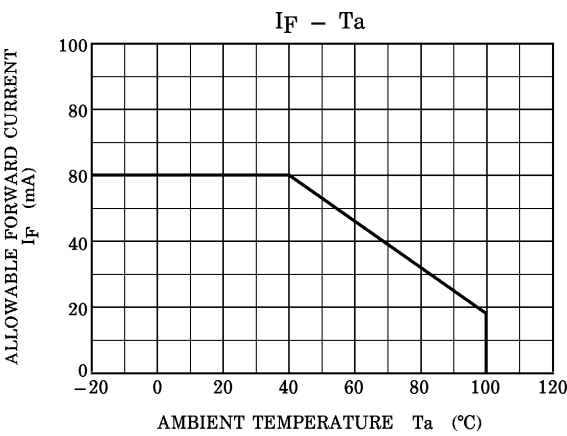

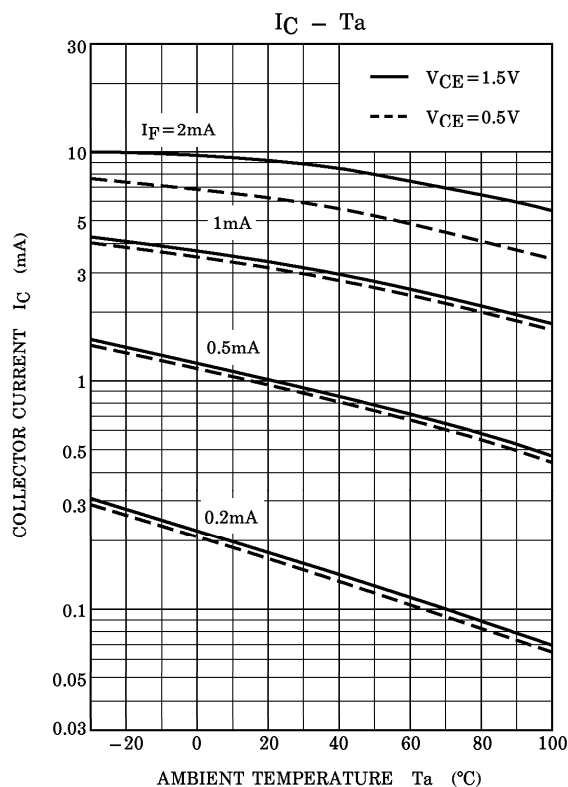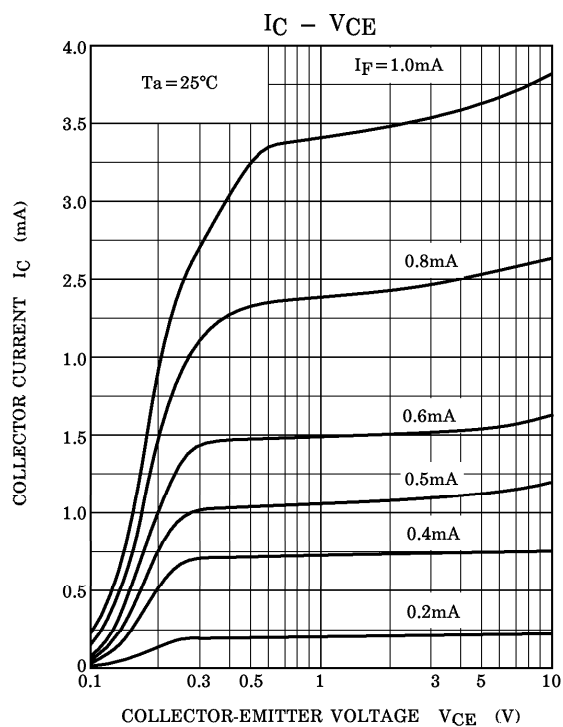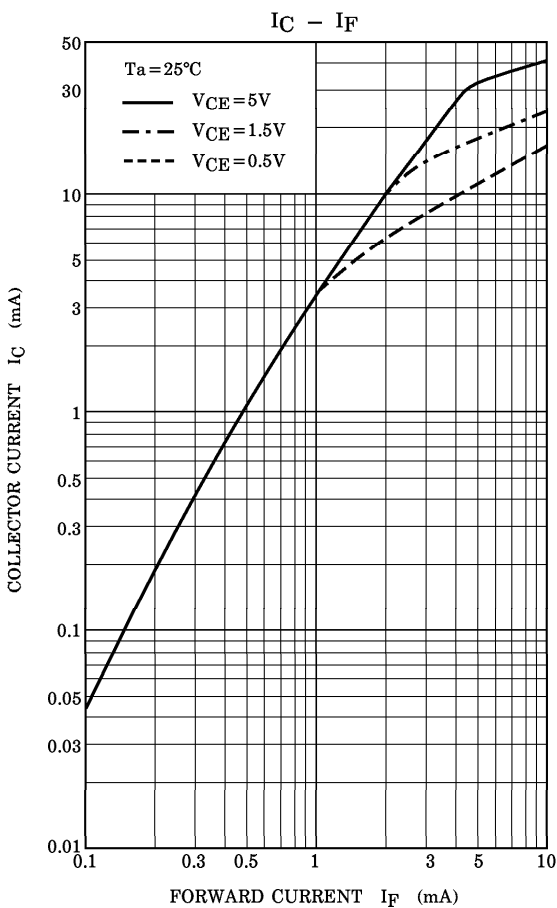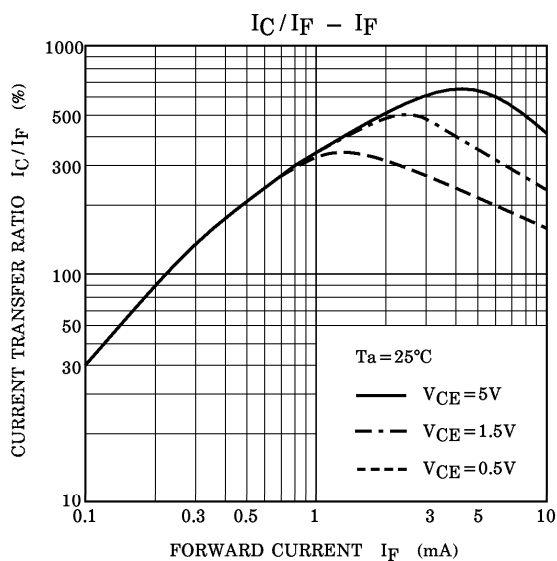

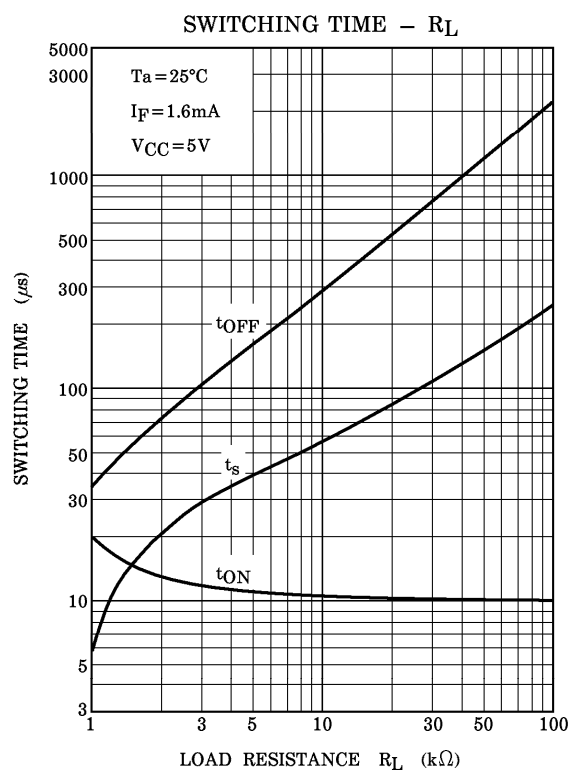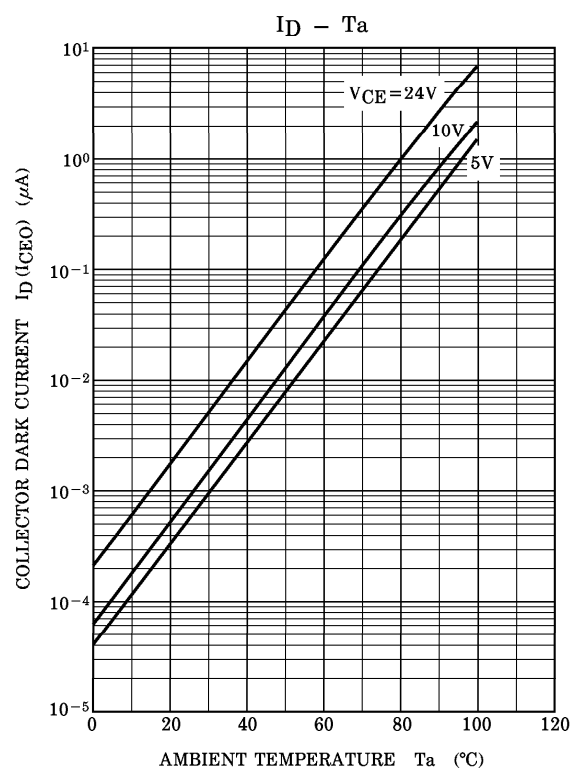

RESTRICTIONS ON PRODUCT USE

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.