

TM150SA-6


TM150SA-6



- **IT (AV)** Average on-state current **150A**
- **VRRM** Repetitive peak reverse voltage **300V**
- **VDRM** Repetitive peak off-state voltage **300V**
- **TRIPLE ARMS**
- **Non-Insulated Type**

Welders

Dimensions in mm

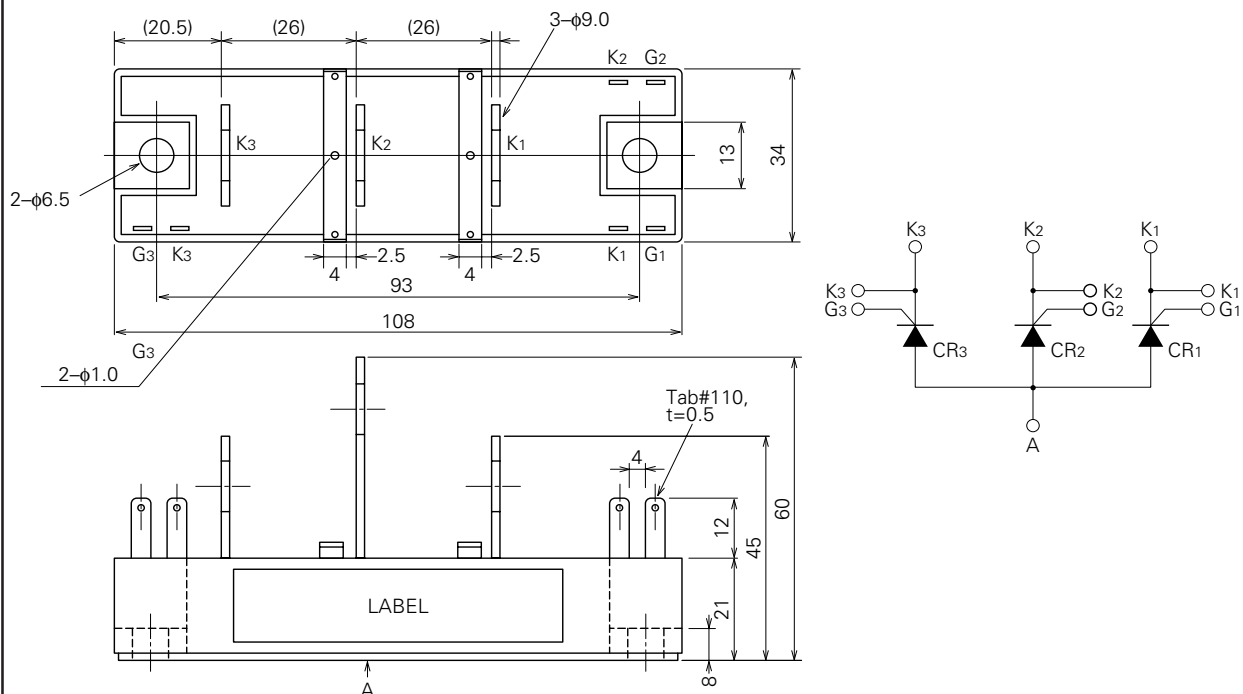

TM150SA-6

MEDIUM POWER GENERAL USE
NON-INSULATED TYPE

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Voltage class	Unit
		6	
VRRM	Repetitive peak reverse voltage	300	V
VRSM	Non-repetitive peak reverse voltage	360	V
VR (DC)	DC reverse voltage	240	V
VDRM	Repetitive peak off-state voltage	300	V
VD SM	Non-repetitive peak off-state voltage	360	V
VD (DC)	DC off-state voltage	240	V

Symbol	Parameter	Conditions	Ratings	Unit
IT (RMS)	RMS on-state current		230	A
IT (AV)	Average on-state current	Three-phase, half-wave, T _C =119°C	150	A
ITSM	Surge (non-repetitive) on-state current	One half cycle at 60Hz, peak value	3000	A
I ² t	I ² t for fusing	Value for one cycle of surge current	3.8 × 10 ⁵	A ² s
di/dt	Critical rate of rise of on-state current	V _D =1/2V _{DRM} , I _G =1.0A, T _j =150°C	100	A/μs
PGM	Peak gate power dissipation		5.0	W
PG (AV)	Average gate power dissipation		0.5	W
VFGM	Peak gate forward voltage		10	V
VRGM	Peak gate reverse voltage		5.0	V
IFGM	Peak gate forward current		2.0	A
T _j	Junction temperature		−40~+150	°C
T _{stg}	Storage temperature		−40~+125	°C
—	Mounting torque	Main terminal screw M8	8.83~10..8	N·m
			90~110	kg·cm
		Mounting screw M6	1.96~2.94	N·m
			20~30	kg·cm
—	Weight	Typical value	250	g

ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IRRM	Repetitive peak reverse current	T _j =150°C, VRRM applied	—	—	40	mA
IDRM	Repetitive peak off-state current	T _j =150°C, VDRM applied	—	—	40	mA
VTM	On-state voltage	T _j =150°C, I _{TM} =450A, instantaneous meas.	—	—	1.2	V
dv/dt	Critical rate of rise of off-state voltage	T _j =150°C, V _D =2/3V _{DRM}	200	—	—	V/μs
VGT	Gate trigger voltage	T _j =25°C, V _D =6V, R _L =2Ω	—	—	3.0	V
VGD	Gate non-trigger voltage	T _j =150°C, V _D =1/2V _{DRM}	0.25	—	—	V
IGT	Gate trigger current	T _j =25°C, V _D =6V, R _L =2Ω	15	—	100	mA
R _{th} (j-c)	Thermal resistance	Junction to case (per 1/3 module)	—	—	0.15	°C/W
R _{th} (c-f)	Contact thermal resistance	Case to fin, conductive grease applied (per 1/3 module)	—	—	0.15	°C/W

TM150SA-6


MEDIUM POWER GENERAL USE
NON-INSULATED TYPE

PERFORMANCE CURVES


MAXIMUM ON-STATE CHARACTERISTIC

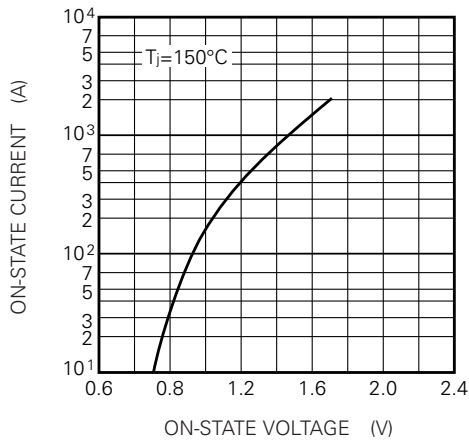


RATED SURGE (NON-REPETITIVE)
ON-STATE CURRENT

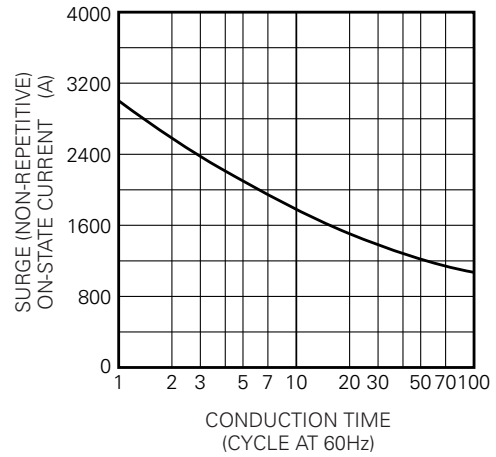


GATE CHARACTERISTICS

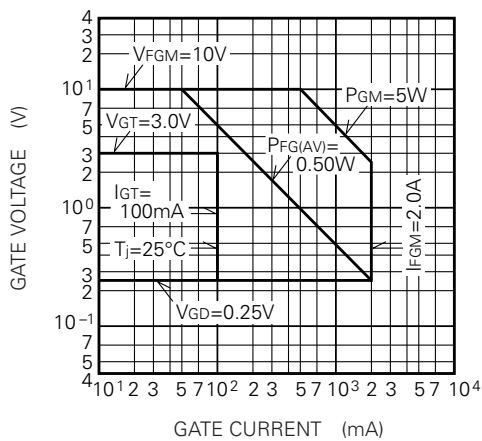


MAXIMUM TRANSIENT THERMAL
IMPEDANCE (JUNCTION TO CASE)

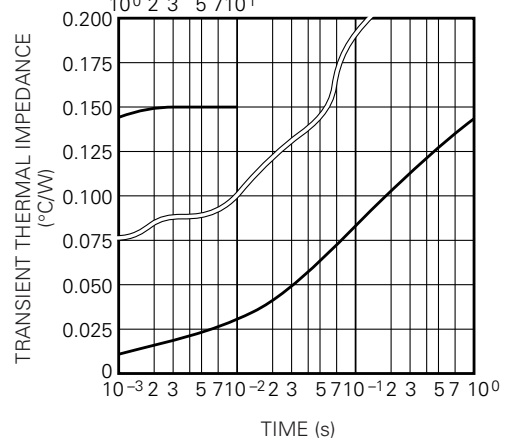

MAXIMUM AVERAGE ON-STATE
POWER DISSIPATION
(SINGLE PHASE HALF WAVE)

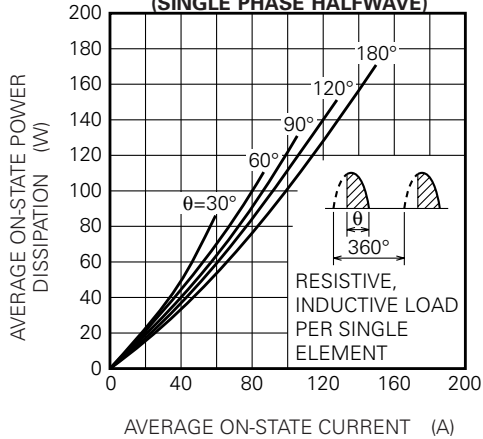

LIMITING VALUE OF THE AVERAGE
ON-STATE CURRENT
(SINGLE PHASE HALF WAVE)

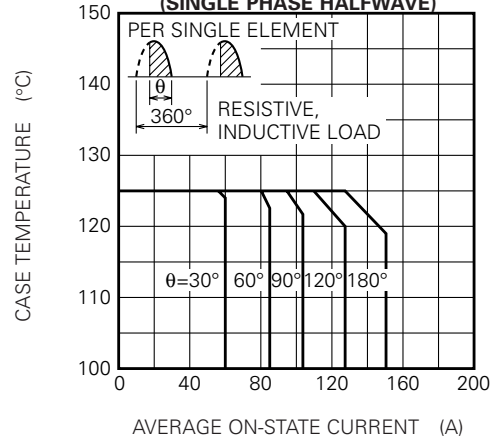

TM150SA-6

MEDIUM POWER GENERAL USE
NON-INSULATED TYPE

